

**CATALOG
NUMBER
ELEVEN**



Leslie

MOBILE HOME SUPPLIES


1920 Stewart Ave., S. W., Atlanta 15, Ga. Phone PO 6-3666

ARCTIC CIRCLE


"THE ORIGINAL"

MOBILE HOME COOLER

MOBILE HOME COOLER

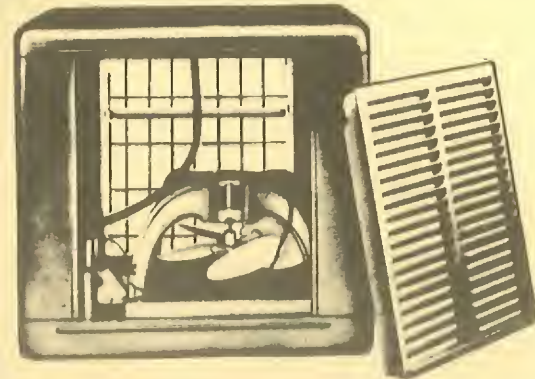

CONTROLLED COOLING
EASY TO INSTALL
NO POWER DRAIN
REMOVES COOKING ODORS
SIMPLE TO OPERATE
FILTERS AS IT COOLS

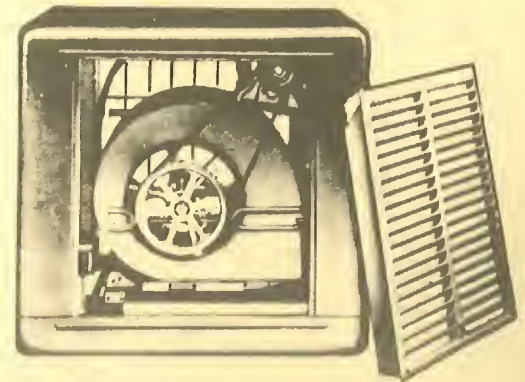

Blower Type

Cools two to three room mobile home. Powerful blower. 1/4 H.P. motor. Cabinet 28" x 28" x 26" high. 115 Volt. Complete with grille kit and pump Wt. 128 lbs.

AC-2 (GB-2211DP) single speed: 2200 CFM

AC-3 (GB-2211DP-2) two speed: 2200/1460 CFM

Mobile Home Coolers

Cools average mobile home or one room. Large 14" fan. 1/20 H.P. motor. Cabinet: 28" x 28" x 26" high. 115 Volt. Complete with grille kit and pump. Wt. 61 lbs.

AC-1 (GD-2114DP-2) two speed: 1800/1200 CFM




Room Cooler

Fan Type. Volume cooling at lowest cost. Large 16-inch fan delivers cooled air for one room. 1400 CFM. Equipped with electric cord, switch, window filler panels. Easily installed in double-hung window. Cabinet: 23" W. x 18" D. x 23 1/2" H.

AC-5 (F-2000) single speed Wt. 41 lbs.

AC-6 (D-2016P-2) two speed with pump Wt. 51 lbs.

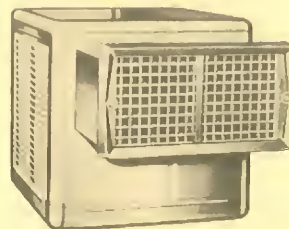


Window Coolers

These coolers are designed for casement or double-hung window installation. Available with single and two speed motor. Exclusive four-way adjustable plastic grilles. New fiberglass backed filters assure maximum cooling and filtering efficiency. Available in models from 2000 to 5000 CFM. Cabinet: 28" W. x 23 1/4" D. x 26" H.; grille size 23 3/4" W. x 12 1/2" H.

AC-10 (SR-2010-2) two speed Wt. 101 lbs.

AC-11 (SR-2010P-2) two speed, pump Wt. 104 lbs.

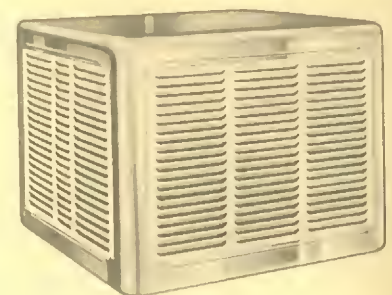

Blower Type

For largest-size mobile home, or up to four rooms in home. Big 12 7/8" blower. 1/3 H.P. motor. Cabinet: 28" x 28" x 34 1/4" high. 115 Volt. Complete with grille kit and pump

AC-4 (GB-3312DP-2) two speed 3100/2060 CFM Wt. 139 lbs.

Microglas Replacement Filters

Packaged for easy installation. Each Microglas replacement pack contains ready cut filter and individually wrapped aspen pad to fit your cooler model. Packages include number of filters required for each cooler.

AC-20 (2 pads size 17 x 19 and 1 pad size 22 x 19) for AC-10, AC-11

AC-21 (4 pads size 22 x 19) for AC-1, AC-2, AC-3

AC-22 (4 pads size 22 x 28) for AC-4




RECIRCULATING PUMP KITS

Permits re-use of water in areas where supply or disposal problem exists. Float valve assembly automatically shuts off flow of water to reservoir when correct level is reached. Easily installed.

AC-7 (P26-K) Pump kit for AC-1, AC-2, AC-3, AC-6 Wt. 3 lbs.

AC-8 (P36-K) Pump kit for AC-4 Wt. 6 lbs.



WATER CONNECTOR KIT

Simplifies connection to outside water supply. Consists of hose faucet adapter, adapter valve, 25 ft. of 5/16" copper tubing. Fits on standard faucet. Easy to install.

AC-9 (TIK) Water Connector kit Wt. 4 lbs.

Leslie's

THE SOUTH'S FIRST and FINEST

| | Page | | Page | | Page |
|----------------------------|---------------------------|--|--|-----------------------------------|--|
| A | | Fittings, gas & water | 17, 34, 39, 40, 41, 42, 43, 44, 45, 46, 48, 49 | Park assys. & conn. | 10, 11, 15 |
| Air conditioners | 1, 53 | Freezers | 33 | Pipe insulations | 52 |
| Almond sticks | 25 | Furniture | 24, 25 | Plumbing supplies | 27, 28, 42, 43, 44, 45, 46, 47, 48, 49, 52 |
| Antennas, TV | 24 | G | | R | |
| Assist bars | 20 | Gas light fixtures | 17 | Refrigerators, electric & butane | 33 |
| Awnings, aluminum & canvas | 22, 23 | Gas tanks & stands | 41 | Regulators | 40 |
| Awning accessories | 22, 23 | Grease caps | 8 | Resistors | 9 |
| Awning rail | 23 | H | | Roof coating | 50, 51 |
| Axle assemblies | 8 | Hardware | 18, 19, 20, 21 | S | |
| B | | Heater accessories & parts | 26, 27, 28, 34, 35, 36, 37, 39, 40, 41 | Screen door grilles | 24 |
| Balls | 6, 7 | Heaters, water | 47, 52 | Sealing compounds | 16, 23, 50, 51 |
| Ball covers | 7 | Heaters | 34, 35, 38 | Sewer connections | 42, 43, 45 |
| Bath tubs | 45, 46 | Helper springs | 3, 4, 5 | Shower cabinets & accessories | 46 |
| Blinds, venetian | 25 | Hinge, comb. door & screen | 25 | Sinks & fittings | 45, 46, 48, 49 |
| Brake controls | 8, 9 | Hitches | 2, 3, 5, 6, 7 | Springs, helper | 3, 4, 5, 6 |
| Brakes, electric | 9 | Hose, water & sewer | 42, 48 | Stabilizing jacks | 3, 5 |
| Brakes, hydraulic | 8 | Hot plates | 38 | Steps | 6, 24 |
| Breakaways | 8, 9 | Hub caps | 8 | Stoves & accessories | 26, 27, 28, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41 |
| C | | I | | T | |
| Canvas | 23 | Ironing board | 25 | Tables | 24 |
| Caulking & sealing & paint | 16, 23, 50, 51 | J | | Tanks, gas & oil | 35, 37, 41 |
| Chairs | 24 | Jacks | 3, 5, 6, 7 | Tank holders | 41 |
| City water intakes | 49 | Jack base & wheel chock | 6 | Tape, electric | 16, 52 |
| Connectors, electrical | 9, 10, 11, 12, 13, 14, 15 | L | | Tape, masking, electric, friction | 16 |
| Cook stoves | 38 | Lavatories | 45, 46 | Television antennas | 24 |
| Cook stove accessories | 26, 27, 38, 39, 40, 41 | Light fixtures, electric | 17, 20 | Toilets | 43, 44, 45 |
| Coolers | 1, 53 | Light fixtures, gas | 17 | Tools, Flaring & cutting | 41 |
| Copper tubing | 41 | Lights, clearance & directional, stop & tail | 12, 13 | Traps | 42, 43, 45, 46, 48 |
| Cord, extension & electric | 9, 10, 11, 12, 15 | Locks, door & trunk | 19, 20, 21 | Tubs & fittings | 42, 45, 46 |
| Couplers | 2, 5, 6, 7 | Louvers | 27, 28, 32 | V | |
| D | | M | | Venetian blinds & accessories | 25 |
| Directional signals | 12 | Medicine cabinets | 46 | Ventilators & mechanisms | 26, 27, 28, 29 |
| Door chimes | 25 | Mirrors, extension | 5 | Voltage reducers | 9 |
| Drapery rods | 25 | Moulding | 18, 23, 49 | W | |
| Drier | 25 | O | | Washing machine | 25 |
| E | | Oil filters | 35 | Water coolers | 1 |
| Electric connectors | 9, 10, 11, 12, 13, 14, 15 | Oil tanks, stands & gauge | 35, 37 | Water heaters | 47, 52 |
| Electric cords & cable | 10, 11, 15 | Overload springs | 3, 4, 5 | Water heater accessories | 47, 52 |
| Electric fixtures | 14, 17, 20 | P | | Water hose | 48 |
| Electric park connectors | 10, 15 | Paints & caulking | 23, 50, 51 | Water pump | 48 |
| Extension mirrors | 5 | | | Wheels & accessories | 8 |
| F | | | | Windows & accessories | 29, 30, 31, 32 |
| Fans | 26, 27, 28, 29, 53 | | | Wire | 9, 10, 11, 12, 15 |
| Faucets | 46, 49 | | | | |

Take advantage of the enclosed SELF-ADDRESSED ENVELOPE when sending in your order.

MINIMUM ORDER—\$1.00.

CLAIMS—All claims on materials lost or damaged in transit shall be made by consignee, except PARCEL POST claims which shall be made through our office.

TERMS-NET CASH with order, or if C. O. D. is requested, a 25% deposit must accompany order. Please do not ask us to make C. O. D. shipments without a deposit.

On parcel post shipments be sure to include sufficient postage and the insurance fee. We have no facilities for handling open accounts and where there is a small difference it necessitates our shipping C. O. D. for the balance even if it amounts to 15c. PLEASE AVOID THIS ADDITIONAL EXPENSE TO YOU BY SENDING SUFFICIENT POSTAGE. If you send too much, the balance will immediately be re-

SPECIAL INSTRUCTIONS

turned to you. C. O. D. fees are costly and you can avoid these by sending enough money.

Please be sure that your order shows a description of the article as well as our stock number to avoid any errors.

Shipment can be made by express, freight, motor truck, air mail, air express or parcel post. Be sure to designate how you prefer shipment, otherwise our shipping department will use their best judgment.

RETURN OF MERCHANDISE—No returns accepted without authorization from our office. 10 per cent handling charge on all returns. Merchandise out of stock over 30 days will not be accepted for credit.

ALL PRICES ARE F.O.B. ATLANTA. ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE


PARCEL POST RATES FROM ATLANTA

| Zone | Limit of Zone | 1st Lb. | Each Add'l Lb. | Amount | Insured Fee | C.O.D. Fee |
|-------------|---------------------|---------|----------------|-------------------------|-------------|------------|
| 1st and 2nd | thru 149 miles | .23 | .04 | From \$ 0.01 to \$ 5.00 | .10 | .30 |
| 3rd | 150-299 miles | .23 | .05 | From 5.01 to 10.00 | .10 | .40 |
| 4th | 300-599 miles | .24 | .07 | From 10.01 to 25.00 | .20 | .60 |
| 5th | 600-999 miles | .26 | .10 | From 25.01 to 50.00 | .20 | .70 |
| 6th | 1000-1399 miles | .28 | .12 | From 50.01 to 100.00 | .30 | .80 |
| 7th | 1400-1799 miles | .30 | .16 | From 100.01 to 150.00 | .40 | .90 |
| 8th | 1800 miles and over | .32 | .18 | From 150.01 to 200.00 | .40 | 1.00 |

Weight Limit—40 lbs. local, 1st and 2nd zones, 20 lbs. 3rd thru 8th zones

Size Limit —72" for length and girth combined

EAZ-LIFT

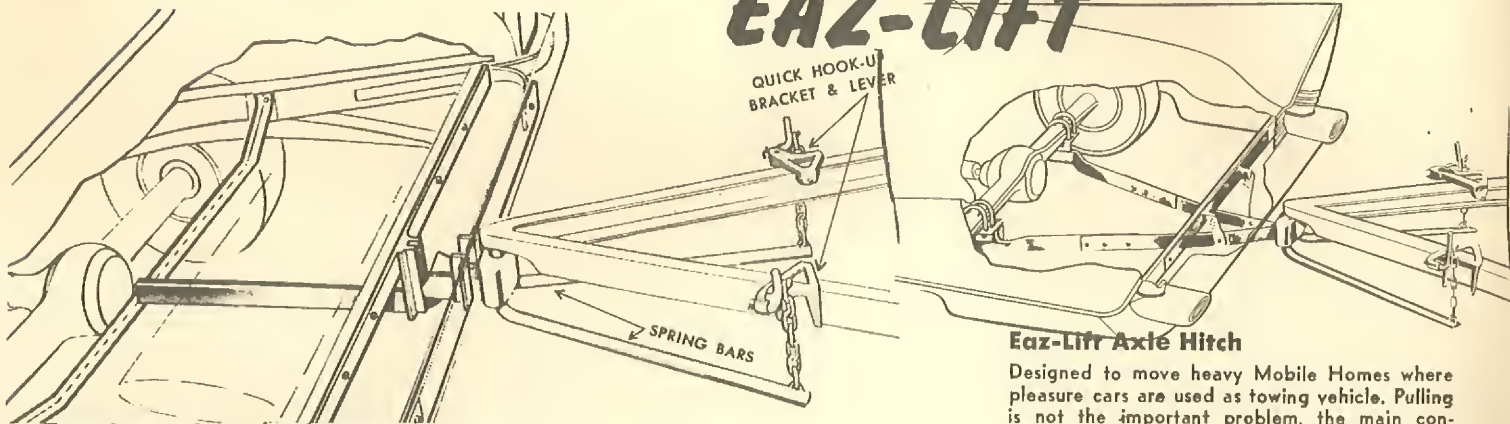

Regular and Jumbo Hitches

CONNECTS and DISCONNECTS with car at any angle, even when trailer is parked on uneven ground. Clamps to any trailer tongue; tension of springs positively secures quick hookup bracket to tongue. Tapered spring action gives 5 inches. NO SWAY—NO SUCTION. Double springs work against each other at off-center angles.

Regular Eaz-Lift

| | | |
|-------|-------------------------|-------------|
| EL-1 | Complete (D) | Wt. 75 lbs. |
| EL-2 | Trailer attach. (B) | Wt. 40 lbs. |
| EL-3 | Sleeve—right | Wt. 3 lbs. |
| EL-4 | Sleeve—left | Wt. 3 lbs. |
| EL-5 | Complete (D), Chrome | Wt. 76 lbs. |
| EL-10 | Eaz-Lift Chrome Cover | Wt. 2 lbs. |
| EL-26 | Spring and chain, right | Wt. 15 lbs. |
| EL-27 | Spring and chain, left | Wt. 15 lbs. |
| EL-28 | Quick hook-up, right | Wt. 6 lbs. |
| EL-29 | Quick hook-up, left | Wt. 6 lbs. |

Jumbo Eaz-Lift

| | | |
|-------|-------------------------|-------------|
| EL-8 | Complete (D) | Wt. 90 lbs. |
| EL-9 | Trailer attach. (D) | Wt. 50 lbs. |
| EL-11 | Sleeve—right | Wt. 3 lbs. |
| EL-12 | Sleeve—left | Wt. 3 lbs. |
| EL-14 | Spring and chain, right | Wt. 17 lbs. |
| EL-15 | Spring and chain, left | Wt. 17 lbs. |
| EL-16 | Quick hook-up, right | Wt. 8 lbs. |
| EL-17 | Quick hook-up, left | Wt. 8 lbs. |

Eaz-Lift Axle Hitch

Designed to move heavy Mobile Homes where pleasure cars are used as towing vehicle. Pulling is not the important problem, the main consideration is to enable car to carry heavy hitch load. Springs are made of high tensile steel; operates as other Eaz-Lifts. Axle hitch extends mobile home tongue 5 ft. longer by using distance between rear axle and bumper as additional leverage, which reduces actual hitch load. Bolts on car SIMPLY, EASILY and QUICKLY—NO WELDING. Fits all mobile homes and cars.

EL-40 Eaz-Lift Axle Hitch Wt. 140 lbs.

TOUR-AID




Tour-Aid Hitch

Adjustable extension tongue and drawbar combination actually distributes "down-weight" of trailer over all four wheels of your car. Initial "down-weight" is directed over rear axle where TOUR-Aid drawbar fastens to most rigid section of car frame. Its adjustable, fulcrum-like action distributes equalizing weight to front wheels and keeps them in proper contact with the road.

T-21 Tour-Aid hitch Wt. 104 lbs.
T-22 Yoke carrier assy.
T-28 Locking pin with cotter pin.
T-29 Towbar with extension bar.

GLIDE-A-RIDE

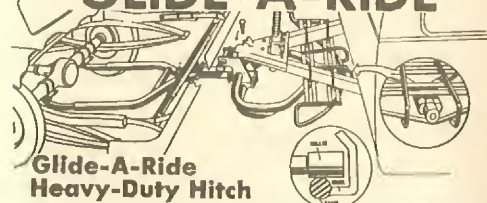


Glide-A-Ride Heavy-Duty Hitch

Reduces pull on steering wheel, eliminates side thrust, avoids driver fatigue. Weight is carried directly on rear axle housing of car, permitting car and trailer to ride in a normal position. Fits all makes and models of cars. Easily and quickly installed. No welding, no helper springs.

G-10 Heavy Duty Hitch Wt. 192 lbs.

Glide-A-Ride JUNIOR TRAVEL HITCH

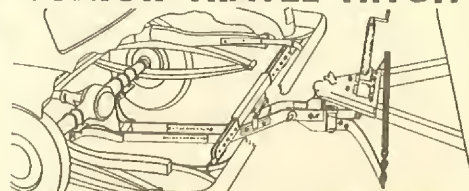

Glide-A-Ride Junior Travel Hitch

Low price hitch with all advantages of the "heavy-duty" Glide-A-Ride. Draw bar weight up to 750 lbs. COMPLETELY BOLT-ON. Designed to ride axle instead of frame, and holds car and trailer in perfect alignment.

G-11 Junior Travel Hitch Wt. 108 lbs.


WARNER

mobilehome HITCH

Install with a Crescent Wrench

Automotive
Engineered

No Overload
Springs

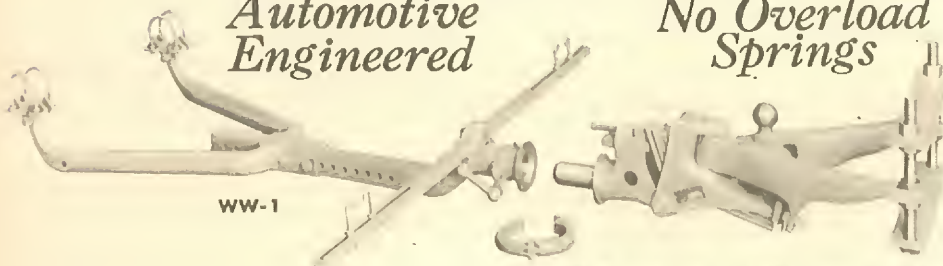


WW-1

WW-1 Warner Axle Hitch

Wt. 210 lbs.

Engineered for your relief from driving strain. Constructed ruggedly for your safety! Designed for your easy installation! Manufactured for your long range economy! Guaranteed for your protection!

EQUAL-I-ZER

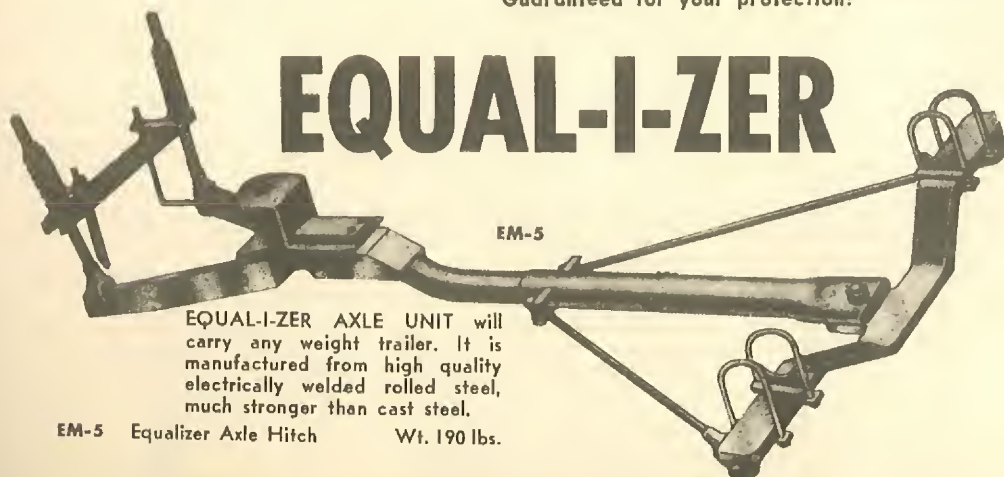

EM-5

EQUAL-I-ZER AXLE UNIT will carry any weight trailer. It is manufactured from high quality electrically welded rolled steel, much stronger than cast steel.

EM-5 Equalizer Axle Hitch

Wt. 190 lbs.

Leslie's

THE SOUTH'S FIRST and FINEST

REESE BAR-LEVEL HITCH


the ultimate in
ECONOMY and SIMPLICITY

... a real "easy-to-use"
EQUALIZING HITCH

Bar-Level is simple enough for anyone, even a child, to operate. Takes but a few seconds added to normal hook-up time. Has many exclusive safety, construction and operational advantages.




Available with Weld-On or Axle Tow Bar

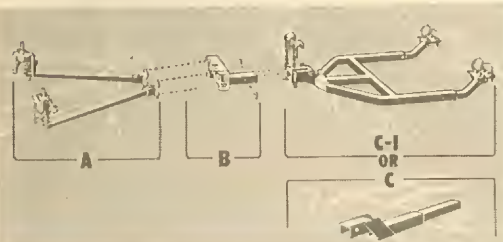

- | | | |
|------|-------------------------------------|--------------|
| R-50 | (A, B, C-1) Bar-Level Axle Hitch | Wt. 110 lbs. |
| R-51 | (A, B, C) Bar-Level Weld-On Hitch | Wt. 85 lbs. |
| R-55 | (D, B) Hydra-Level Hitch Support | Wt. 40 lbs. |
| R-56 | (D, B, C-1) Hydra-Level Axle Hitch | Wt. 110 lbs. |
| R-57 | (D, B, C) Hydra-Level Weld-On Hitch | Wt. 85 lbs. |

HYDRA-LEVEL HITCH D

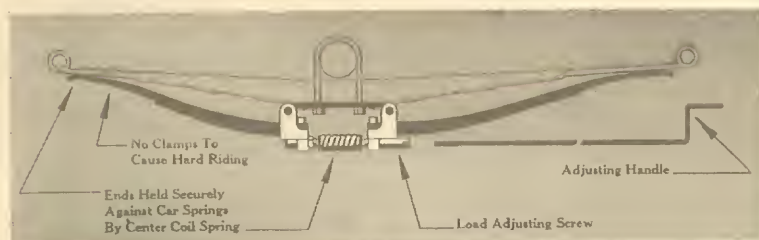

WITH THE REESE TRIPLE-ACTION OVERLOADS YOU CAN . . .

- 1 Adjust your overload springs completely "on" . . . completely "off" . . . or to any desired tension
- 2 Adjust your overload springs from behind (not under) your car.
- 3 Maintain quality of ride at maximum comfort (as before Reese Triple-Action overloads were installed) whether spring is adjusted to on, off, or intermediate tension.

R-30 Reese Triple-Action Overloads
Wt. 21 lbs.

**Be sure to Specify
Year and Model of car**

COIL-LIFT OVERLOAD SPRINGS

3 Sizes

- 500 lb.
Light Lift
R-47 Wt. 10 lbs.
- 750 lb.
Medium Lift
R-46 Wt. 11 lbs.
- 1000 lb.
Heavy Lift
R-45 Wt. 12 lbs.



LOW-BUOY STABILIZER

Sturdy
Cast
Aluminum

Nest
Compactly

- | | | |
|------|----------|-------------|
| R-10 | Set of 4 | Wt. 13 lbs. |
| R-11 | Each | Wt. 4 lbs. |




R-40

REESE WAY-IT

Why guess when asked "What's the hitch weight?" You must know to properly equip the towing car. Use WAY-IT to weigh it, and be sure. Accurate. Sturdily built of cast aluminum.

R-40 Reese Way-It Wt. 5 lbs.

UNITED

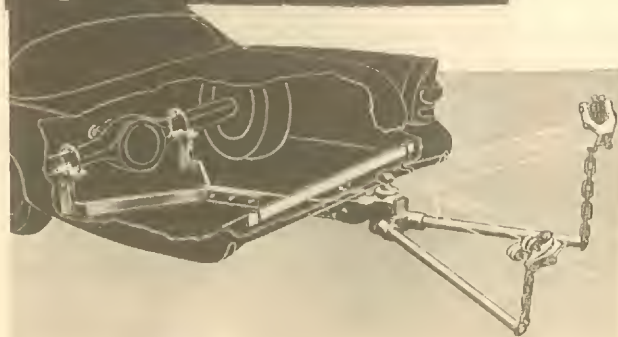

100% Bolted - Axle Hitch

UNITED LEVEL RIDE AXLE HITCH — 100% BOLTED
the Lowest Priced, Highest Quality, Nickel Chrome Steel Hitch.
Made with nickel chrome steel castings — not a fabricated hitch.
**UNITED Axle Hitch Gives You
Easy Hook-Up — No Welding.**

Lever action adjustment with
two chains on trailer tongue
frame

Always level ride for car
and trailer

Fits all cars and trailers

- | | | |
|------|--------------------------------------|--------------|
| AB-1 | United Axle Hitch | Wt. 135 lbs. |
| AB-5 | United Weld-On Bar Hitch (not shown) | Wt. 100 lbs. |

Leslie's

THE SOUTH'S FIRST and FINEST

PNEUMATIC SPRING BOOSTERS

"Air Lifts" Pneumatic Spring Booster



REAR PACKAGES AVAILABLE IN STANDARD OR HEAVY DUTY GRADE

| CAR | YEAR | MODEL | REAR PKG. NO. | CAR | YEAR | MODEL | REAR PKG. NO. | CAR | YEAR | MODEL | FRONT PKG. NO. |
|-------------------------|---------|--|---------------|----------------------------------|---------|--|---------------|--------------------|---------|----------------------------------|----------------|
| BUICK | '38-'58 | All models | A-100 | OPEL | '55-'58 | Olympia & Rekord | B-61 or B-23 | HILLMAN | '50-'55 | All models | C-9 |
| CADILLAC | '50-'55 | All models | B-64 or B-49 | | '55-'57 | Kapitan (prior to Aug. '57 with sway bar behind axle) | ** | HUDSON | '55-'57 | Hornet & Wasp | C-17 |
| | '57 | All models | B-53 | | | Kapitan (Aug. '57 & after with sway bar ahead of axle) | B-60 or B-21 | M. G. | | TD, TF & A | C-9 |
| | '58 | All models (except Commercial) | A-12 | PACKARD | '51-'54 | All models (except series 200) | B-31 | NASH | '53-'57 | All models (except Rambler) | C-17 |
| CHEVROLET | '36-'52 | All models | B-60 or B-21 | | '51-'55 | All series 200 with leaf springs | B-36 | OLDSMOBILE | '41-'53 | All models | C-11 |
| | '53-'54 | All models | B-61 or B-23 | | '55-'56 | All-Torsion Bar Suspension models | B-50 | | '54 | All models | C-12 |
| | '55-'57 | All models (except Convertible) | B-63 or B-40 | PLYMOUTH | '41-'48 | All models | B-61 or B-23 | PACKARD | '42-'50 | All models | C-12 |
| | '58 | Convertible | ** | | '49-'52 | All models | B-50 or B-21 | PLYMOUTH | '40-'54 | All models | C-7 |
| CHRYSLER (See IMPERIAL) | '41-'48 | All models | B-61 or B-23 | | '53-'54 | All models | B-62 or B-25 | PONTIAC (American) | '39-'48 | All models | C-11 |
| | '49-'52 | All models (except Crown Imperial) | B-60 or B-21 | | '55-'56 | All models | B-62 or B-26 | | | | |
| | '51-'52 | Crown Imperial | B-60 or B-22 | PONTIAC | '39-'48 | All models | B-60 or B-21 | PONTIAC (Canadian) | '39-'48 | All models | C-8 |
| | '53-'54 | All models | B-62 or B-26 | | '49-'54 | All models (except '56 S.W.) | B-52 or B-25 | | | | |
| | '55-'56 | All models | B-60 or B-22 | | '55-'56 | Safari & 870 S.W. with Dual Exhaust | B-60 or B-21 | | | | |
| | '57-'58 | All models | B-63 or B-48 | | '56 | 870 S.W. with Single Exhaust | B-65 or B-51 | RAMBLER | '51-'55 | All models | C-18 |
| DeSOTO | '41-'48 | All models | B-61 or B-23 | | '56 | 860 S.W. with Single Exhaust | B-60 or B-21 | | '56-'58 | All models (except '58 American) | C-19 |
| | '49-'52 | All models | B-60 or B-21 | | '57 | All models (except Safari Chieftain) | B-55 or B-51 | | '58 | American | C-18 |
| | '53-'54 | All models | B-62 or B-26 | | '57 | Safari Chieftain | ** | | | | |
| | '55-'56 | All models | B-60 or B-22 | | '58 | All models | A-11 | STUDEBAKER | '50 | Commander & Land Cruiser | C-12 |
| | '57-'58 | All models | B-63 or B-48 | PONTIAC (Canadian Series 20, 22) | '39-'52 | All models | B-60 or B-21 | VOLVO | | All PV-444 models | ** |
| DODGE | '41-'48 | All models | B-61 or B-23 | | '53-'54 | All models | B-61 or B-23 | WILLYS | '46-'55 | All Jeeps | B-37 |
| | '49-'52 | All models | B-60 or B-21 | | '55-'57 | All models (except Convertible) | B-53 or B-40 | | '56-'58 | S.W. 2 wheel drive | B-37 |
| | '53-'54 | All models | B-62 or B-26 | | '58 | Convertible | A-13 | | '56-'58 | CJ-3 Jeep, 2 & 4 wheel drive | B-39 |
| | '55-'56 | All models | B-60 or B-22 | RAMBLER | '51-'55 | All models | B-33 | | '46-'58 | 1 Ton Truck | B-37 |
| | '57-'58 | All models | B-63 or B-48 | | '56-'58 | All models (except '58 American) | A-43 or B-43 | | | | |
| DUSEL | '58 | Pacer & Ranger | B-64 or B-49 | | '58 | American | B-33 | | | | |
| | '58 | Citation, Corsair & S.W. | B-65 or B-51 | STUDEBAKER | '46-'50 | All models | B-51 or B-23 | | | | |
| FORD | '49-'55 | All models (except '55 T.B.) | B-50 or B-21 | | '51-'54 | All models | B-61 or B-24 | | | | |
| | '56-'57 | Thunderbird | B-44 | | '55 | All models | B-35 | | | | |
| | '56 | All models (except Fairlane) | B-60 or B-21 | | '56-'58 | All models | B-51 or B-24 | | | | |
| | '56 | Fairlane series | B-64 or B-49 | VAUXHALL | '52-'57 | Velox | B-61 or B-24 | | | | |
| | '57 | All Passenger Cars (except Skyliner) | B-64 or B-49 | | | | ** | | | | |
| | '57-'58 | All S.W. & Ranchero | B-55 or B-51 | VOLVO | | All PV-444 models | ** | | | | |
| | '58 | Skyliner | ** | WILLYS | '46-'55 | All Jeeps | B-51 or B-23 | | | | |
| | '58 | All Passenger Cars (except Convertible & Skyliner) | B-60 or B-21 | | '56-'58 | S.W. 2 & 4 wheel drive | B-61 or B-23 | | | | |
| | '58 | Convertible, S.W. & Ranchero | B-64 or B-49 | | '56-'58 | CJ-3 Jeep, 4 wheel drive | B-60 or B-21 | | | | |
| | '58 | Thunderbird | A-14 | | '56-'58 | CJ-5 Jeep | B-20 HD | | | | |
| HENRY J. | '51-'54 | All models | B-61 or B-23 | | '56-'58 | 1 Ton Truck | B-60 or B-21 | | | | |
| HUDSON (See RAMBLER) | '36-'48 | All models | B-62 or B-26 | | '57-'58 | FC-150 | B-20 HD | | | | |
| | '48-'54 | All Stepdawn models | B-27 | | '57-'58 | Dispatcher | ** | | | | |
| | '55-'57 | Hornet & Wasp | B-32 | | | | | | | | |
| IMPERIAL | '55-'56 | All models | B-50 or B-22 | | | | | | | | |
| | '57-'58 | All models | B-63 or B-48 | | | | | | | | |
| KAISER | '46-'52 | All models | B-60 or B-21 | | | | | | | | |
| LINCOLN | '49-'54 | All models | B-60 or B-21 | | | | | | | | |
| | '55 | All models | B-55 or B-51 | | | | | | | | |
| | '56-'57 | All models | B-64 or B-49 | | | | | | | | |
| | '58 | All models | A-15 | | | | | | | | |
| MERCURY | '49-'58 | All models | B-60 or B-21 | | | | | | | | |
| | '57-'58 | All models | B-65 or B-51 | | | | | | | | |
| METEOR | '49-'55 | All models | B-60 or B-21 | | | | | | | | |
| | '56 | All models (except Niagara & Rideau) | B-60 or B-21 | | | | | | | | |
| | '56 | Niagara and Rideau | B-64 or B-49 | | | | | | | | |
| | '57 | All models (except S.W.) | B-64 or B-49 | | | | | | | | |
| | '57 | Station Wagon | B-65 or B-51 | | | | | | | | |
| | '58 | All models (except Convertible & S.W.) | B-60 or B-21 | | | | | | | | |
| | '58 | Convertible & S.W. | B-64 or B-49 | | | | | | | | |
| MONARCH | '49-'56 | All models | B-50 or B-21 | | | | | | | | |
| | '57 | All models | B-65 or B-51 | | | | | | | | |
| NASH (See RAMBLER) | '36-'48 | All leaf spring models | B-61 or B-23 | | | | | | | | |
| | '49-'57 | All models | B-32 | | | | | | | | |
| OLDSMOBILE | '41-'51 | All coil spring models | A-100 | | | | | | | | |
| | '51 | Model 98 only | B-65 or B-52 | | | | | | | | |
| | '51-'56 | All leaf spring models (except '51-98) | B-50 or B-22 | | | | | | | | |
| | '57-'58 | All models | B-55 or B-52 | | | | | | | | |

**Available on special order.

ACCESSORIES

EXTENSION ROSE SETS 48" length For cars with normal overhang (2 hose each set) 60" length For cars with long overhang

For convenience when inflating and deflating the REAR Air Lift Cylinders.

GAUGES Penicil-type Calibrated from 4 to 50 psi For measuring pressures in the Air Lift Cylinders and Tires

FOR LIGHT DUTY TRUCKS WITH PICKUP AND PANEL TYPE BODIES HEAVY DUTY GRADE FOR ADDED CAPACITY UP TO 1000 POUNDS NOT RECOMMENDED ON MODELS WITH DUAL WHEEL AXLES

IMPORTANT:—Listings below are not to be considered complete coverage in the light truck field. Availability of packages for further coverage will be announced from time to time.

| TRUCK | YEAR | MODEL | REAR PKG. NO. |
|--------------|---------|--------------------------------------|--------------------|
| CHEVROLET | '47-'53 | ½ Ton | B-16 HD |
| | '54 | ½ Ton | B-60 HD or B-21 HD |
| —1st series | '55 | ½ Ton | B-60 HD or B-21 HD |
| —2nd series* | '55 | ½ Ton (3100) (3200)— ¾ Ton (3600) | B-19 HD or B-13 HD |
| | '56-'58 | ½ Ton (3100) (3200)— ¾ Ton (3600) | B-19 HD or B-13 HD |
| FORD | '53-'56 | ½ Ton, F-100 | B-19 HD or B-13 HD |
| | '56-'58 | ¾ Ton, F-250 | B-19 HD or B-14 HD |
| | '57 | ¾ Ton, F-100 ¾ Ton, F-250 | B-17 HD |
| | '58 | Ranchero | B-55 or B-51 |
| | | Ranchero | B-64 or B-42 |
| G.M.C. | '47-'54 | ½ Ton (1001) | B-16 HD |
| —1st series | '55 | ½ Ton (100) | B-15 HD |
| —2nd series* | '55 | ¾ Ton (100), ¾ Ton (150) | B-19 HD or B-13 HD |
| | '56-'58 | ¾ Ton (100), ¾ Ton (150) | B-19 HD or B-13 HD |
| STUDEBAKER | '49-'58 | ½ Ton | B-15 HD |
| WILLYS | '46-'58 | 1 Ton Truck | B-60 HD or B-21 HD |
| | '57-'58 | FC-150 | B-20 HD |


*Chevrolet & G.M.C. '55 2nd Series easily identified by "wrap around" Windshield.

Leslie's

THE SOUTH'S FIRST and FINEST

Jacks, Couplers, Helper Springs, Mirrors

5

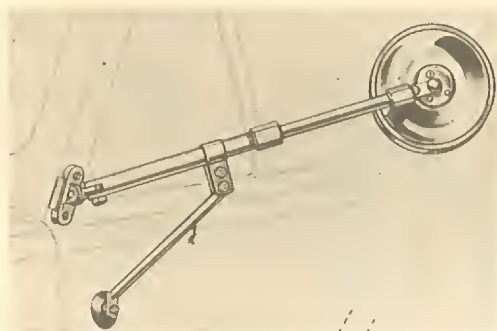

NORLIPP MIRROR

- | | | |
|------------|------------------|-------------|
| N-25 (460) | Trail-Vue Mirror | Wt. 2 lbs. |
| N-27 (462) | Support arm only | Wt. 1 lb. |
| N-28 (422) | Mirror head only | Wt. 1/2 lb. |

NORLIPP

Chrome and Aluminum Car-Trailer Mirror No. 460

Rustproof, shockproof, sturdy, durable; Large 5" dia. mirror head with 29 sq. in. area of vision; swivel ball and socket adjustments at base and head of mirror allows complete freedom in positioning and holding mirror as set; telescopes from 9 1/2" to 20"; locks firmly at any desired length; clamps on door, no holes to drill.

NEW—Bracket for Easier mounting. Can be clamped on or mounted with sheetmetal screws on either right or left side of car.

Hinge at bracket allows arm to be raised or lowered 180°.



NORLIPP TRUCK MIRROR


Heavy-duty "Western Style" Truck Mirror UNIVERSAL—fits all trucks including wrap-around windshields; extra large, with 144 square inches of vision; double strength glass sealed in rubber, shock and water proof; heavy-duty extension arms lock securely in any position; universal mounting brackets fit all cabs, in pairs; wt. 10 lbs. each.

- N-29 Norlipp No. 490 with 4 extension arms
 N-30 Norlipp No. 491 with 4 extension arms and 1 arm support
 N-31 Norlipp No. 492 arm support only

Coupler Clamp

Made entirely of steel. Finished in aluminum with Cadmium plated bolts.


A-50 Wt. 3 lbs.

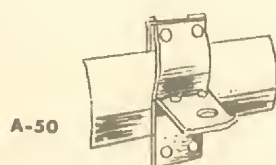


Pyramid Stabilizing Jack

Made of strong steel, aluminum finish.

- TD-15 (set of 4)
 Wt. 35 lbs.
 TD-16 each Wt. 9 lbs.

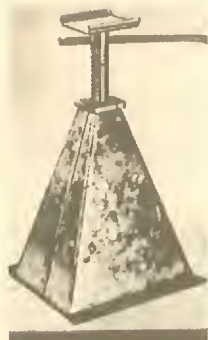

TD-15 TD-16

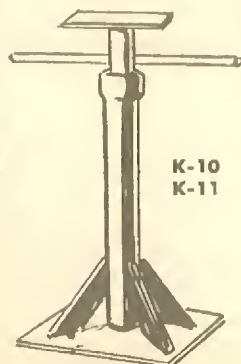


K-10
K-11

The Ken-Jack Stabilizer

Levels, stabilizes, supports your trailer. Ends all annoying sway, twisting and vibration of trailer when parked. All Steel.

- K-10 Set of 4. Wt. 48 lbs.
 K-11 Each. Wt. 12 lbs.

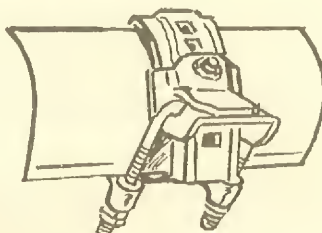

Rugged All Steel Bumper Clamp

Fits practically any bumper. Will handle any load the bumper can safely carry. Rubber cushion prevents marring surface of bumper. High tensile alloy steel used at points of greatest stress. Hole is for 5/8" ball bolt. (Ball is not supplied.)

F-25 Wt. 8 lbs.



B52 Stack Jack




This new jack is made of the same alloy used in the famous B-52 aircraft. It is both lightweight and extremely strong.

- | | | |
|-------|---------------------------|-------------|
| CA-10 | Stack jack B52 (set of 4) | Wt. 14 lbs. |
| CA-11 | Stack jack B52, each | Wt. 4 lbs. |

Ace Helper Springs

Simplicity, strength and ease of installation combined with low cost make Ace helper springs a necessity; fit between rubber bumpers on frame of car and retaining bases which bolt on rear axle; the helper spring bases remain on axle; springs can be removed or replaced as desired merely by jacking up car. One model fits all make cars.

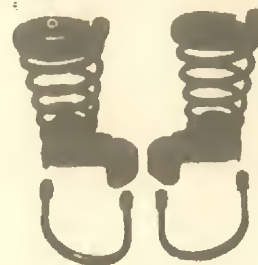

A-120 Wt. 10 lbs.

Tour-Aid Aluminum Stabilizer Jack



Light weight . . . high capacity . . . adjustable from 11" to 18" . . . adjusting screw is steel-working in steel. Each jack capable of supporting 6 tons! Conical shape permits nesting for travel storage.

- | | | |
|------|--------------------------|-------------|
| T-40 | Tour-Aid jacks, set of 4 | Wt. 13 lbs. |
| T-41 | Tour-Aid jacks, each | Wt. 4 lbs. |

Boltfast Trailer Hitch

Beautiful! Rugged! Easy to Install! A bolt-on type hitch to match the beauty of your car, yet rugged enough to safely tow any trailer; specifically designed and engineered to fit your car; tow pressure on frame as it should be; accommodates any standard size hitch ball.

Specify year and model of car

- | | | |
|------|-----------------|-------------|
| BF-1 | Aluminum finish | Wt. 45 lbs. |
| BF-2 | Chrome finish | Wt. 45 lbs. |

Leslie's

THE SOUTH'S FIRST and FINEST

Atwood Jacks, Couplers, Towing Units

Jack Foot Nos. 204 and 206

Adjusts itself on uneven ground automatically; designed to replace casters when required or desired on permanent locations; swivel tilting base is 8" square; tested at over 3,000 lbs. weight down pressure with no distortion.

A-14 (204 Jack foot to fit ram end of 420 jack mfg'd since March, '51 Wt. 7 lbs.

A-16 (206) Jack foot to fit 625 jack Wt. 7 lbs.

Dual-Ball Towing Unit 97

With a 2-in. ball for 5,000 lbs. and under and a 2-5/16-in. ball for 5,000 to 10,000 lbs. Swiveling coupler ball sizes can be done in a matter of seconds. The unit complete can be bolted or welded to your towing bracket.

A-1 Complete unit. Wt. 14 lbs.

A-2 Less balls. Wt. 7 lbs.

A-3 Locating pin for towing unit

New 925 Heavy Duty Coupler for 2-5/16" ball

New exclusive welded model used in combination with new No. 625 jack. Differs from 921 and 922 only in respect to the larger hole required to handle No. 625 jack.

A-4 Wt. 21 lbs.

New 625 Heavy Duty Jack

New heavy-duty jack designed to handle 10 wides, two-story mobile homes, and the longer, heavier, front-end models. The companion unit is the new heavy-duty coupler No. 925. New features of this jack are: 1—larger outer housing tube to contain larger, heavier ram tube that has nearly double the ram strength of 420; 2—adjustable extension handle for more leverage to gain easier front-end lifting, and more lift has been added; and 3—larger diameter bearings in the same standard vertical roller bearing caster.

A-5 Wt. 26 lbs.

Reducer Bushing 6890

To simplify changeover from 2" ball with 1" shank to 2-5/16" ball with 1 3/8" shank. With this bushing available only one 1 3/8" hole is needed in ball mounting platform; remove 2-5/16" ball, insert this bushing and install 2" ball with 1" shank.

A-49

Jack Base and Wheel Chock 101

Simple unit to keep front end of trailer rigid; keeps caster wheel from sinking into ground; also to block trailer or tow car wheel on grade; or turned upside down in soft ground to form base for jack when changing tires.

A-45 Wt. 5 lbs.

378-379 Stabilizing Jacks

5° outward tilt provides firm, secure foundation; prevents sideways movement; pivoted handle rotates sleeve around screw; large ribbed foot swivel and tilt mounted to fit ground slope; clamped against trailer floor for traveling; must be used in pairs due to 5° tilt; maximum capacity 3000 lbs.

A-30 (378) For heights 15" to 19" Wt. 6 lbs.

A-31 (379) For heights 12" to 16" Wt. 6 lbs.



Complete 420 Jack, 720 Coupler for 2" ball

With permanent, non-removable operating handle; enclosed sleeve-type lifting ram; when ram is raised caster is automatically released from ram shaft; no set screws; over 4" more handle height to clear gas tanks; maximum height from ground to coupler 25 1/2"; clearance from coupler to handle 18"; 1200 lbs. lifting capacity.

A-35 Wt. 35 lbs.

Complete 420 Jack, 922 Coupler for 2-5/16" ball

This unit gives you the new heavy-duty coupler required for mobile homes weighing from 5,000 to 10,000 lbs.; increased depth of adapter to 3 7/8"; bigger neck to take heavy 2-5/16" ball with 1 3/8" shank; jack same as A-35.

A-48 Wt. 42 lbs.

Replacement Parts for A-35 & A-48

- A-13** 2" Ball. Wt. 2 1/2 lbs.
- A-21** Lock washer 1" for 2" ball
- A-22** Lock washer 1 3/8" for 2 5/16" ball
- A-29** Jack less Caster. Wt. 8 lbs.
- A-34** Housing Cap. Wt. 3 oz.
- A-36** Outer Housing Tube Assembly. Wt. 6 lbs.
- A-37** Ram Assembly. Wt. 8 lbs.
- A-38** Caster. Wt. 8 lbs.
- A-39** Handle Assembly. Wt. 1 lb.
- A-40** Thrust Bearing Assembly. Wt. 1 lb.
- A-41** Bottom Plate. Wt. 2 lbs.
- A-42** Coupler for 2" Ball. Wt. 10 lbs.
- A-43** Locking Lever for Coupler.
- A-44** Jack Assembly comp. Wt. 22 lbs.
- A-46** 2-5/16" Ball. Wt. 5 lbs.
- A-47** Coupler for 2-5/16" Ball. Wt. 15 lbs.

711 Coupler with 2" ball

Strong, sturdy, fits inside a straight tongue constructed of three inch channel iron or outside a two-inch or smaller tongue. Attaching shank eight inches long. Easy to operate. Can be padlocked. Anti-rattle. Complete with 2-inch ball.

A-20 Wt. 7 lbs.

914 Coupler with 2-5/16" ball

Heavy-duty, bull-necked coupler for any straight-shank coupler towing job. It's head-end construction is identical with Atwood 921 and 922 coupler . . . has same big 2 5/16" forged steel ball. For straight tongue jobs on 5,000 to 10,000 pound pulls with maximum SAFETY.

A-25

Wt. 15 lbs.

Folding Trailer Step No. 801

Angle brackets, side arms and tread made of steel, zinc-plated to resist rust. When getting ready to travel, this STEP can be slid back out of sight under trailer body, where it is held firmly by spring catches in the angle brackets. Tread size 8" by 20". Safe, neat and reasonably priced.


A-32 Wt. 11 lbs.





Leslie's

THE SOUTH'S FIRST and FINEST

Couplers, Jacks, Balls and Covers *in TWO styles!*

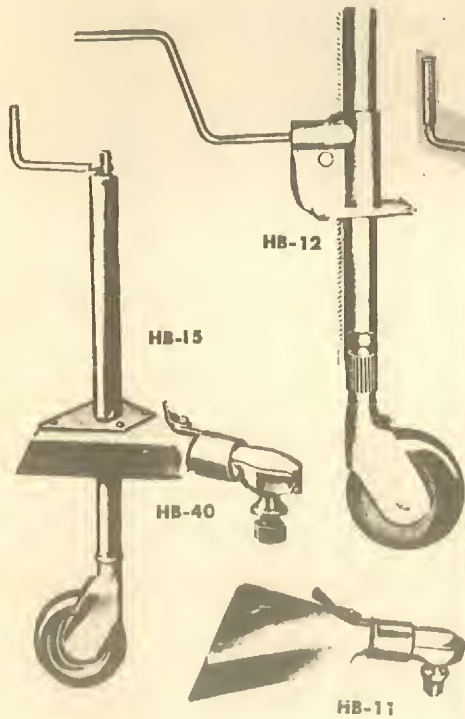

MARVEL
Now

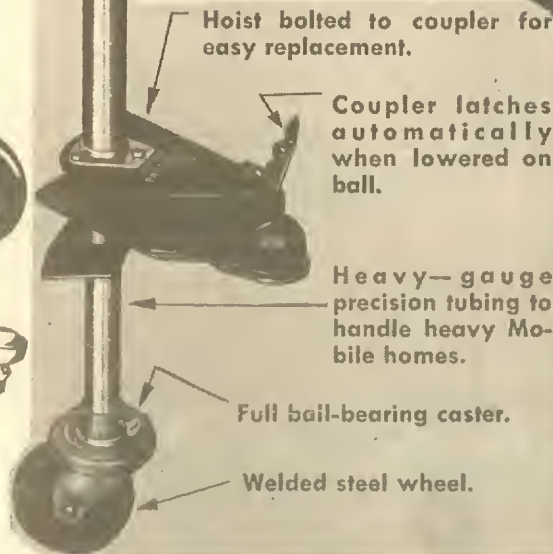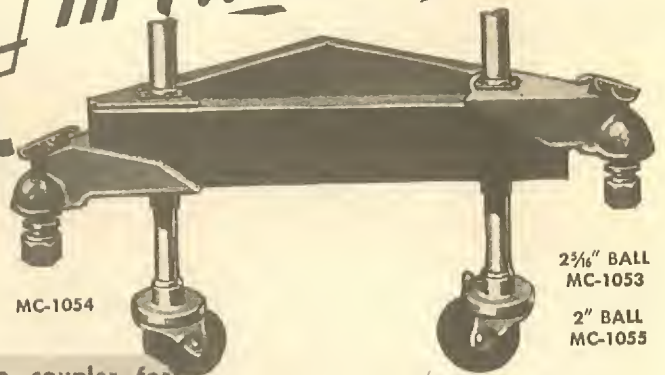


Bull Dog Jacks and Couplers

Ease of operation; 50° angle tongue-end; parking jack features easy gear type operation; plate designed for simple attachment.

- HB-11 Coupler only for 2" ball.
Wt. 15 lbs.
- HB-12 Parking jack only.
Wt. 12 lbs.
- HB-15 Parking jack only.
Wt. 23 lbs.
- HB-40 Coupler for 2-5/16" ball.
Wt. 20 lbs.

Bull-Dog Balls—Drop-forged Steel

- HB-22 1 3/4" Ball with 3/4" shank
- HB-23 1 3/4" Ball with 1" shank
- HB-24 2" Ball with 1" shank
- HB-41 2-5/16" Ball with 1 1/4" shank




Machined Steel Balls (Wt. 8 lbs.)

- T-24 (24) 2" ball, 1/4" stem, 4" high
- T-25 (25) 2" ball, 1/4" stem, 5" high
- T-34 (34) 2-5/16" ball, 1/4" stem, 4" high
- T-35 (35) 2-5/16" ball, 1/4" stem, 5" high

THE NEW style Marvel Coupler makes it easy to keep those "high mounted" coaches riding level. Now Marvel offers a coupler designed to mount on the bottom of the frame as well as a coupler for conventional mounting on top of the frame. By selecting the proper style you can adjust the "hitch level".

Marvel couplers have a minimum number of moving parts yet they grip the 2 5/16" ball firmly . . . offer positive hitch security . . . unhitch easily when lock is released. The heavy, steel casting is protected by extra strong sections at all points of stress or wear. You can be sure they exceed ICC requirements for the "over 5,000 pound" category.

The conventional model is also available for 2" balls.

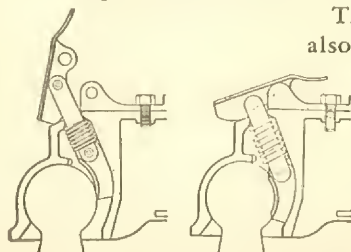

Marvel Couplers Now in Two Styles


New style Marvel coupler makes it easy to keep those "high mounted" coaches riding level; designed to mount on bottom of frame as well as conventional mounting on top of frame; couplers have minimum number of moving parts yet grip ball firmly . . . offer positive hitch security; unhitch easily when lock is released.

Marvel Replacement Parts

- M-40 (MC-542) 2" ball with 1 1/4" shank
Wt. 4 lbs.
- M-48 (MC-505) 2" ball with 1" shank
Wt. 3 lbs.
- M-49 (MC-507) Caster and wheel assy.
Wt. 9 lbs.
- M-50 (MC-553) Hoist (less caster) for discontinued MC-1030 combination
Wt. 14 lbs.
- M-52 (MC-509) Cap handle assy. Wt. 2 lbs.
- M-53 (MC-551) Inner tube assy. Wt. 5 lbs.
- M-91 (MC-574) Coupler (conventional mounting) for 2" ball Wt. 10 lbs.
- M-92 Hoist MC-566 with caster Wt. 24 lbs.
- M-93 Hoist MC-566 less caster Wt. 16 lbs.
- M-96 (MC-540) 2-5/16" ball with 1 1/4" shank
Wt. 5 lbs.
- M-97 (MC-564) Coupler (conventional) for 2-5/16" ball Wt. 16 lbs.
- M-98 (MC-571) Coupler (inverted) for 2-5/16" ball Wt. 16 lbs.

Marvel Complete Assemblies

- M-90 (MC-1055) Hoist and coupler with 2" ball Wt. 35 lbs.
- M-94 (MC-1053) Hoist and conventional coupler with 2-5/16" ball Wt. 40 lbs.
- M-95 (MC-1054) Hoist and inverted coupler with 2-5/16" ball Wt. 40 lbs.



Chrome Plated Ball Cover

Attractive; adds to appearance of car and keeps grease on ball from rubbing off on clothing; fastens securely to ball with Allen set screw; Allen wrench furnished.

EC-25 For balls 2" and less. Wt. 2 1/4 lbs.

EC-26 For 2-5/16" ball. Wt. 4 lbs.

Leslie's

THE SOUTH'S FIRST and FINEST



TORQ-LESS AXLES SAFETY ENGINEERED FOR ALL TYPES OF TRAILERS

PATENTED


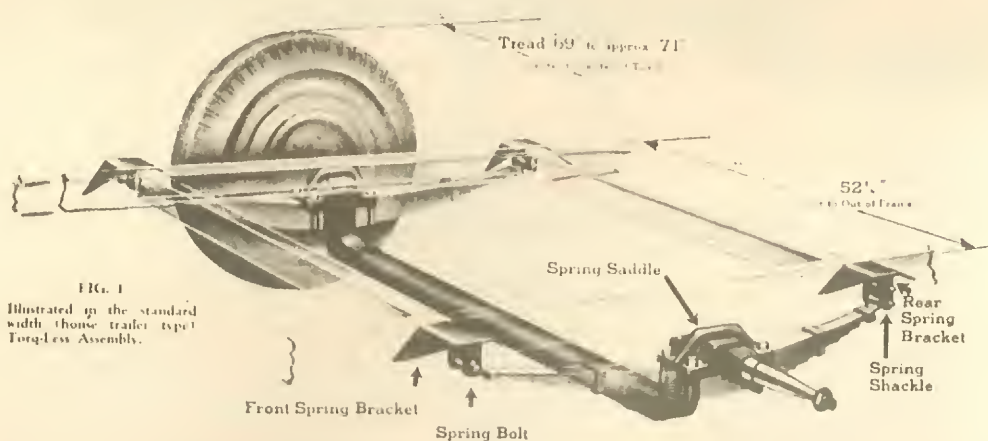


FIG. 1
Illustrated in the standard
with (house trailer type)
Torq-Less Assembly.

TORQ-LESS SINGLE and TANDEM AXLE ASSEMBLIES
with Either **STRAIGHT OR DROP AXLE**
(Complete information available on request)

Stromberg
Hydraulic
Brakes

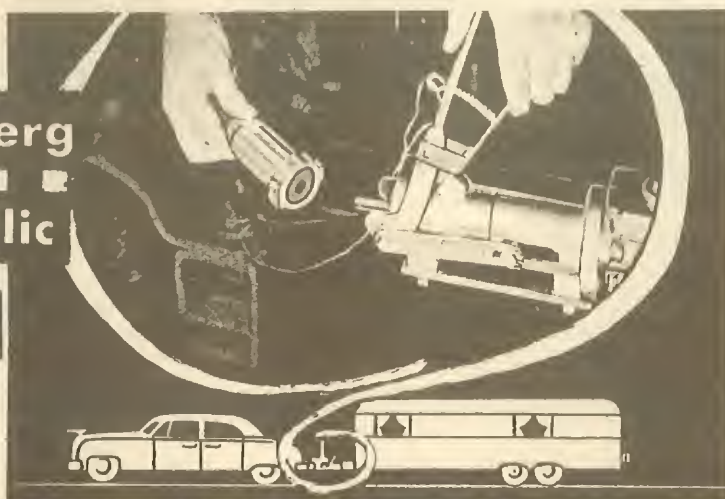

SURE-STOP BRAKE CONTROL

Synchronized braking.

No tapping hydraulic lines.


TWO INDEPENDENT BRAKING SYSTEMS

- Operates off car brake pedal OR steering column control. You may use either as desired.
- Built in hill holder.
- No "grab." One second adjustable brake pressure control.
- Easily installed —
- For use with either Kelsey Hayes or Warner Electric Brakes.

- SBC-6** Sure-Stop brake control, 6 volt
SBC-12 Sure-Stop brake control, 12 volt
SBC-20 Sure-Stop 12 volt Relay and Resistor Block only for changing 6 volt Sure-Stop to 12 volt

break-a-way switch and harness.

Combination
Terminal Block
and Break-
away Switch
• Chrome plated



ELIMINATES GROUNDS AND SHORTS

- Easily Mounted in "A" Frame of any Trailer
- All harness wires fitted with Terminal lugs
- All wires A.T.A. color coded


- SBC-25** Sure-Stop Break-A-Way Switch and Harness

Leslie's

THE SOUTH'S FIRST and FINEST

WARNER ELECTRIC BRAKES FOR 3500 LBS.

MAXIMUM GROSS AXLE LOAD FOR 16" WHEELS

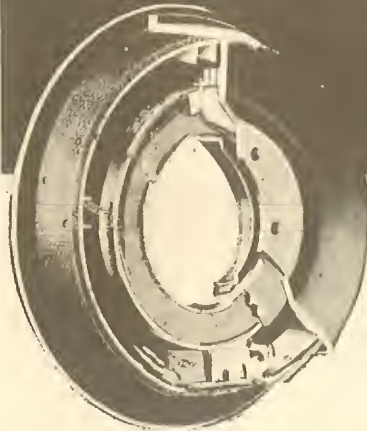

BRAKE SYSTEM

Includes kit for trailer, kit for car, and 2 drums

H-20 Wt. 93 lbs.

DRUMS

May be bored and drilled to fit any 12" x 1 3/4" brakes.

H-27 Wt. 14 lbs. ea.

Resistors for Brake System


For use on cars having 12 or 24 volt electrical systems; these will correct voltage to the proper 6 volts for which the brake is designed. Wt. 1/2 lb.

H-47 Resistor for 4 brakes
H-48 Resistor for 2 brakes




Emergency Break-Away Assembly

H-44 Complete, Wt. 1 1/2 lbs.
H-45 Coupling cable hookup only
H-46 Chain attachment only




KELSEY-HAYES BRAKE CONTROLLER

Adjustable... Automatic and Manual; trailer brakes can be applied manually or by pressure on car brake pedal through hydraulic connection included with kit. Handle knob adjustable for varying load and road conditions.



KH-1
Brake controller
Wt. 4 lbs.

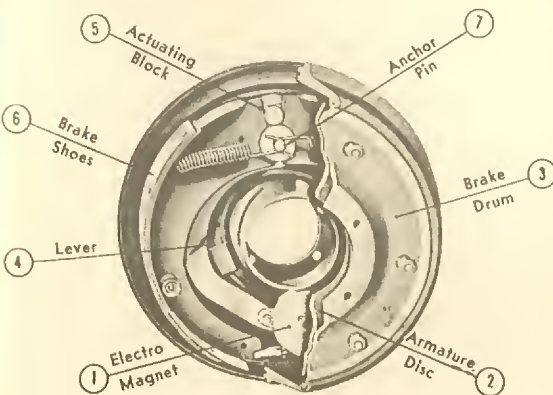

NON AIR-GAP
MAGNET

Warner Kit #1-26002 for Trailer

- 1—set (2) 12" x 1 3/4" brakes (3 7/8" bolt circle), armatures, armature mounting accessory, grease guards and axle adapters
- 1—brake mounting accessory
- 1—coupling plug (2 way)
- 1—wire clamp accessory for trailer
- 35'—#12-2 conductor wire
- H-26** Complete kit Wt., 57 lbs.
- H-25** 35-ft. wire 12-ga. 2 cond. Wt. 2 1/2 lbs.

Twist-Lock Brake Connector Wt. 6 oz.

- H-23** Plug—2 way, **H-76** Plug—3 way
- H-29** Socket—2 way **H-77** Socket—3 way

HYDRAULIC CONVERTER

from electric to hydraulic brakes.

H-80 Hydraulic converter only

ACCESSORY KIT for Hydraulic Converter

For 3/16" or 1/4" hydraulic fittings depending on what type car installation will be made on. One of these is essential for installation of the converter

- H-81** 3/16" fittings **H-82** 1/4" fittings



BARGMAN 63BD BREAKAWAY DEVICE

Automatically sets trailer brakes in case of breakaway from tow car!

Our No. **BP-179** (63-BD) Breakaway Device
Wt. 1 lb.

Kelsey-Hayes Electric Brakes

Controller permits current to flow through (1) electro-magnet which is attracted to armature disc (2), which is attached to and rotating with brake drum (3). The frictional and magnetic force developed by magnet against armature disc draws the lever in the direction in which brake drum is rotating. Movement of lever (4) changes the position of actuating block (5), spreading brake shoes (6), so they press on drum. This lever action multiplies the magnet force, providing a smooth, powerful action.

- KH-122-1** (30963) Single band 12" x 2"
- KH-122-2** (39742) Two-shoe adjustable 12" x 2"
- KH-102-2** (40839) Two-shoe adjustable 10" x 2 1/4"



No. 40101 Controller

H-23
H-76



#12-2 conductor wire

hand lever


Warner Kit #8183-A for Car

- 1—controller, 2 brake, including hand lever and lever mounting accessory
- 1—wire clamp accessory
- 20'—#12-2 conductor wire
- 1—coupling socket mounting accessory
- 1—coupling socket (2-way)
- 1—coupling socket bracket assembly
- H-32** Complete kit Wt. 7 lbs.
- H-33** Kit less wire Wt. 6 lbs.
- H-28** Car controller Wt. 4 lbs.
- H-35** 20-ft. wire, 12-ga. 2 cond. Wt. 1 1/2 lbs.

Replacement Parts for Trailer and Car Kits

- H-49** Magnet, Wt. 1 1/2 lbs.
- H-50** Armature, right hand, Wt. 8 1/2 lbs.
- H-51** Armature, left hand, Wt. 8 1/2 lbs.
- H-52** Band and lining assembly
- H-53** Band spring
- H-54** Magnet spring
- H-55** Magnet wire assembly
- H-74** Brake lining kit


H-80



COLE-HERSEE CONVERTER

Use this device to operate any 6-volt electrical accessories such as radio, heater, etc., from 12-volt system

Our No. **CH-230** Wt. 1 lb.

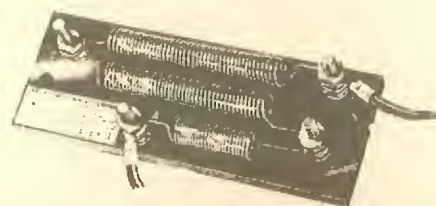

Kelsey-Hayes SELECTIVE RESISTOR

A selective current-reducing unit for use with 12-volt cars when pulling trailers equipped with 6-volt electric brakes.


Our No. **KH-2** Wt. 1/2 lb.

Leslie's

THE SOUTH'S FIRST and FINEST



60-Q-3 SERIES 35 AMPERE 120 VOLT Grounding Type Electrical Fittings for Mobile Home and Park



60-Q-3-PR-O

Park Receptacle with cover, mounted in completely weatherproofed box for outside installation. One inch (1") threaded opening in box for attaching conduit. Spring operated cover locks matching male plug into receptacle.



60-Q-3-RW

Park Receptacle with cover, for mounting within, or on side or bottom of enclosed box.



60-Q-3-PR

Park Receptacle with cover, mounted in steel outlet box for installation under protected covering.

60-Q-3 Completely Matched — Polarized — Grounded — 35 Ampere 120 Volt Electrical Hook-Up between Mobile Home and Park


60-Q-3-M Male Plug

For Park end (power receiving end) of entrance cable. Matches 60-Q-3 series park receptacles.



We recommend No. 8-3 conductor service entrance cable for use with 60-Q-3 fittings. No. 8-3 Neoprene covered cable available in coils or any desired length.

60-Q-3-F Female Plug

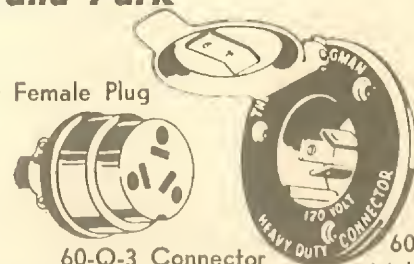

60-Q-3 Connector

60-Q-3-B
Male Base

60-Q-3 Connector consists of male base and female plug with two current carrying terminals plus an equipment ground terminal. Male base is easily installed on the side or underneath the coach body by means of 3 screws. Requires only 1 7/8" opening for mounting. Screw holes are countersunk, and flange is grooved for mastic to provide a moisture-proof installation. Spring actuated cap locks female plug into male body when

connected, acts as weather protection in travel. Specially designed terminals and large terminal screws provide a simple means of attaching wires to terminals. Cable clamps attached to male and female plugs relieve strain on wire connections. Heads of terminal screws in all plugs and receptacles are colored, and bases are marked with corresponding letters to eliminate any guesswork in making proper wire connections.

CONVERTOR ADAPTORS FOR USE WITH 60-Q-3 SERIES PARK RECEPTACLES



60-Q-3-CA

For Converting 60-Q-3 Receptacle to standard 2 pole outlet.



For other type mobile home connectors, convertor adaptors are easily assembled by connecting a 60-Q-3 male plug to a female plug which matches the connection on the mobile home (see illustrations). For a permanent connection, wherever possible, replace the male plug on the service entrance cable with a 60-Q-3 male plug to match the 60-Q-3 park receptacles.



60-Q-3-A Adaptor Converts 60-Q-3-M Male Plug to standard 2 pronged plug for a temporary hook-up only. An added convenience for mobile home owners when traveling. Rubber Collar weatherproofs connection.

60-Q-3-X
Female
Plug with
Rubber Collar

60-Q-3-XA Cord Connector Assembly Male and female Plugs for connecting two lengths of No. 8 3 conductor cable. Weatherproofed — Polarized.

B-70 (60-Q-3-B)

B-71 (60-Q-3-F)

B-73 (60-Q-3-M)

BP-1 (No. 8-3)

BP-2 (60-Q-3-CA)

BP-3 (60-Q-3-X)

BP-4 (60-Q-3-XA)

BP-5 (60-Q-3-A)

BP-39 (60-Q-3-RW)

BP-150 (60-Q-3-PR-O)

BP-151 (60-Q-3-PR)

BP-153 (60-Q-3)

Male base

Female plug

Male plug

No. 8-3 conductor cable, ft.

Adapter to standard 2-pole outfit

Female plug with rubber collar

Cord connector assembly including 60-Q-3-M male plug and 60-Q-3-F female plug

Adapter for temporary hook-up only

Female park receptacle with cover, for mounting in enclosed box

Female park receptacle with cover, weatherproofed, for outside installation

Female park receptacle with cover, for installation under protected covering

Connector including 60-Q-3-F female plug and 60-Q-3-B male base

Conversion Receptacle

Modernizes old fashioned 2-wire, inadequate, unsafe outlets with approved, low cost ground type 35 ampere, 120 volt receptacle.

- Utilizes existing meters, fuses, wiring and outlet boxes in enclosure.
- Matches intake equipment found on majority of mobile homes.
- Metal cover of receptacle locks male plug into position. 4 1/2" x 3 3/8" steel plate mounts on standard 4" rectangular outlet box.

BP-149 (60-Q-3-RPW) PARK RECEPTACLE complete with cover permanently mounted on heavy gauge steel-plate.

BP-240 (60-Q-3-RP) PARK RECEPTACLE less metal covering on bakelite receptacle.

60-Q-3-RPW
PARK RECEPTACLE


Leslie's

THE SOUTH'S FIRST and FINEST




LEKTRO-LINE 50 AMPERE 120/240 VOLT Grounding Type Electrical Fittings for Mobile Home and Park

11




50-PR

Park Receptacle with cover, mounted in weatherproof outdoor type box. Locking ring locks matching male plug into receptacle . . . locks cover when not in use. One and one quarter inch (1-1/4") threaded opening in box for connecting to conduit.

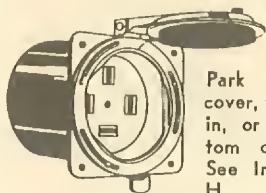

50-A-R

Park Receptacle with cover, for mounting within, or on side or bottom of enclosed box. See Installation C-G & H.



3550 Universal Lektro-Line Park Receptacle

Consists of 60-Q-3-R-W 120 V 35 ampere female outlet and 50-A-R Lektro-Line 120/240 V 50 ampere female outlet mounted on weatherproof cast aluminum box. Overall dimensions 8" x 6" x 7-1/4". Sufficient

space inside for wiring and splicing.

No. 3551 same as 3550 except 1-1/4" tapped hole is in top instead of bottom of box.

Completely Matched—Polarized—Grounded—Weatherproof—50 Ampere 120/240 Electrical Hook-Up between Mobile Home and Park


For park end (power receiving end) of entrance cable. Matches Lektro-Line series park receptacles.



50-A-M Male Plug

We recommend only four conductor entrance cable, consisting of three No. 6 conductors and one No. 8 ground wire, for use with 50-A Lektro-Line fittings. Available in coils or any desired length.

50-F Female Plug

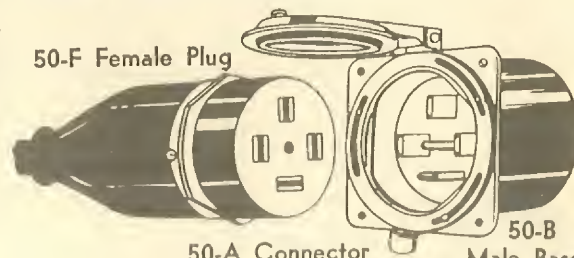


50-A Connector

50-B Male Base.


A ruggedly constructed assembly . . . engineered to meet all electrical demands of the most modernly equipped mobile homes for years to come. Three heavy duty, specially designed, current carrying terminals plus an equipment ground terminal for power and safety. Connector consists of Male Base receptacle for mounting on mobile home body (requires only 27/8" opening for mounting) and matching Female Plug. Park Receptacles with matching Male Plug

available as an assembly or as separate units. All fittings weatherproofed throughout. Locking ring locks plugs securely into male and female receptacles when connected . . . keeps cover securely closed when not in use. Heavy duty terminals and bakelite cores are color coded to facilitate wiring. Cable clamps attached to male and female plugs relieve strain on wire connections.

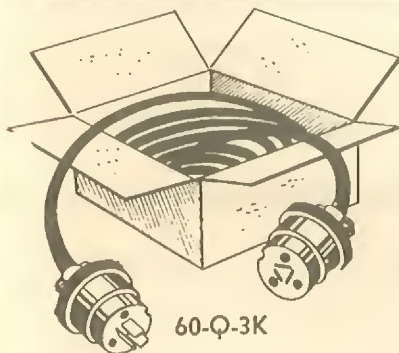

60-Q-3K

Kit Assemblies for 60-Q-3 and 50-A Lektro-Line Fittings Includes connector, male plug and 25 feet of proper sized entrance cable (No. 8 3 conductor for 60-Q-3 fittings, and 3 No. 6 conductors plus 1 No. 8 ground for Lektro-Line fittings). Cable with male and female plugs attached ready for use is individually boxed for shipping with mobile home. Eliminates possibility of tripping over cord or misplacing fittings. Other kit assemblies including adaptors and park receptacles also available. See price list for various kit combinations.

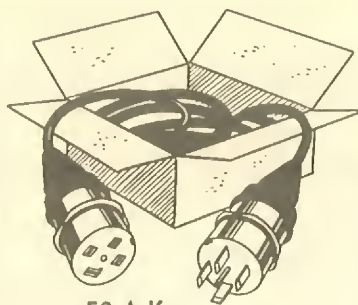

50-A-K

50-A-XA Lektro-Line
Cord Connector
Assembly



Male and female plugs for connecting two lengths of 4 conductor cable. Completely weatherproofed and polarized. 50-A-X Female Plug only with rubber collar and rubber boot.

BP-154 (60-Q-3K)
BP-200 (50-A)

BP-201 (50-B)
BP-202 (50-F)
BP-205 (50-A-XA)

BP-206 (50-A-X)

BP-210

BP-211 (50-PR)

BP-212 (50-A-M)
BP-215

BP-216 (50-A-R)

Kit assembly made to order on request
Connector for 120/240, 50 ampere including 50-F female plug and 50-B male base
Female plug

Cord connector assembly including 50-A-X female plug with collar and boot and 50-A-M male plug (cable not included)

Female plug with rubber collar and rubber boot

Lektro-Line park outfit including 50-PR park receptacle and 50-A-M male plug

Female park receptacle with weatherproof outdoor type box

Male plug

Four conductor entrance cable consisting of three No. 6 conductors and one No. 8 ground wire, ft.

Female park receptacle with cover for mounting in enclosed box

BP-217

BP-218 (50-A-RB)
BP-220 (50-A-K)

BP-230 (3550)

BP-231 (3551)

BP-235

BP-236

Park outfit including 50-A-R female park receptacle and 50-A-M male plug

Cast aluminum box
Kit assembly for 50 ampere made to order on request

Universal Lektro-Line park receptacle consisting of 60-Q-3-RW female outlet and 50-A-R female outlet mounted on weatherproof cast aluminum box with 1 1/4 inch hole tapped in bottom of box

Universal Lektro-Line park receptacle consisting of 60-Q-3-RW female outlet and 50-A-R female outlet mounted in weatherproof cast aluminum box with 1 1/4 inch hole tapped in top of box

Lektro-Line park outfit consisting of 3550 park receptacle with matching male plugs 60-Q-3-M and 50-A-M

Lektro-Line park outfit consisting of 3551 park receptacle with matching male plugs 60-Q-3-M and 50-A-M

Leslie's

THE SOUTH'S FIRST and FINEST

**BARGMAN****NEW****4 IN 1****CLASS-A**

Reflecto-Light STOP-TAIL DIRECTIONAL SIGNAL PLUS REFLECTOR




**Trail-Lite 98
Single Lamp Model**

Incorporates one double filament lamp which may be connected only to Bell system of wiring in an automobile.

BP-9812 Trail-Lite 98, 12 volt

BP-9868 Trail-Lite 98, 6-8 volt

Meets all SAE requirements for Class A fixtures. Surface mounting. Outside diameter $6\frac{5}{8}$ " , projection 2". A large light weight, high temperature red acrylic lens fits over a stamped steel backplate. A small opening just large enough for the wires to be inserted is all that is required in the body of the mobile home or truck. Wt. 2 lbs.



**Trail-Lite 99
Double Lamp Model**

Incorporates one single filament and one double filament lamp which may be connected to any wiring system.


BP-9912 Trail-Lite 99, 12 volt

BP-9968 Trail-Lite 99, 6-8 volt

Directional Signal, Stop, Tail Lights Designed for Flush Mounting


**TRAIL-LITE No. 8
1 Lamp Unit**

**TRAIL-LITE No. 9
2 Lamp Unit**

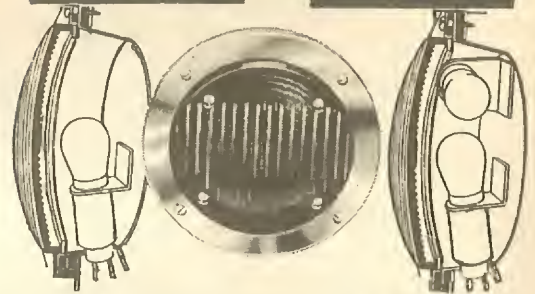

A new "Class A" light. Completely new body design, with chromeplate rim which fits snugly against body for water tight seal. Brilliant Lucite lens with over 12 square inches of luminous area. Two-lamp unit connects to any wiring system used in tow car. One-lamp for only tow car using single-lamp system. Wt. $2\frac{1}{2}$ lbs.

- BP-70** Single-lamp, 6-V bulb
- BP-135** Single-lamp, 12-V bulb
- BP-71** Double-lamp, 6-V bulbs
- BP-136** Double-lamp, 12-V bulbs
- BP-97** Lens for Trail-lite 8 and 9
- BP-98** Gasket for Trail-lite 8 and 9



Sturdy 110 Volt


Electrical Connectors,

No. 58-Q-8 TRAILER CONNECTOR



When female plug is disconnected, the male base of the trailer connector is protected against the weather with a stamped steel locking cover. Cover is permanently riveted to male base and swings to open or lock. Male and female sections are securely locked together when connected. Rubber plug cover, which holds the female insert, is molded to fit snugly into the male base for a watertight seal. Brass cap on outside of rubber cover locks the female plug into the male base. Cap is easily turned to lock or unlock.

- B-220** (58-Q-8) Connector complete
- B-221** (58-Q-8M) Male receptacle
- B-222** (58-Q-4-1) Female plug
- B-223** (58-Q-15) Female plug with brass cap
- B-215** (58-Q-81) Female receptacle

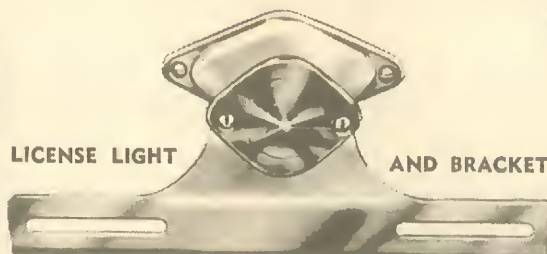

LICENSE LIGHT

AND BRACKET

Measures $4\frac{1}{2}$ " wide by $2\frac{1}{8}$ " high. Includes bracket for license plate. Mounts on surface, projects only $3\frac{1}{4}$ ". Wt. $2\frac{1}{2}$ lbs.


- B-17** Aluminum finish, 6-v lamp
- B-127** Aluminum finish, 12-v lamp
- B-18** Chrome finish, 6-v lamp
- B-128** Chrome finish, 12-v lamp
- B-90** Bracket only, aluminum finish
- B-91** Lens-cap
- B-92** (721-5) Tubular glass lens

Red and Amber Clearance Lights With Plastic Lens

Distinctively designed. Lightweight aluminum backplate, unbreakable plastic lens, lens gasket, 5 candlepower lamp. Mount to body with screws. Wt. 1 lb.

- B-66** Deluxe. $6" \times 2\frac{7}{8}" \times 1\frac{1}{4}"$ deep, 6-v bulb
- B-130** Deluxe light with 12-v bulb
- B-69** Standard. $5" \times 2\frac{7}{8}" \times 1\frac{1}{4}"$, 6-v bulb
- B-131** Standard. $5" \times 2\frac{7}{8}" \times 1\frac{1}{4}"$, 12-v bulb
- B-67** Lens only—RED
- BP-67** Lens only—AMBER
- B-68** Lens gasket

Safe Electrical Hook-up between Mobile Home and Tow Car

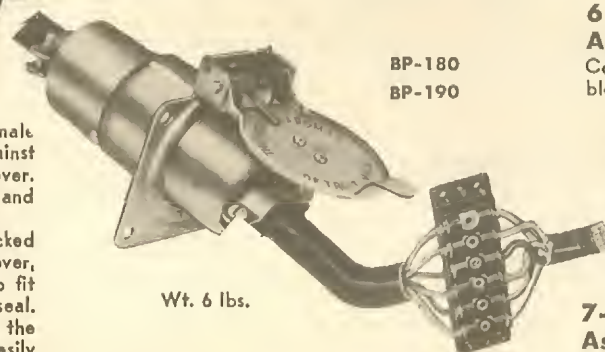

**BP-180
BP-190**

Wt. 6 lbs.

6-Way Color-Coded Connector Assembly

Complete with color-coded 6-way cable, terminal block, and right-angle mounting bracket.

- BP-180** Connector assembly complete
- BP-181** Connector with bracket
- BP-182** Car end (male)
- BP-183** Trailer end (female)
- BP-184** Bracket only
- BP-185** Color coded cable, per foot
- BP-186** Terminal block with cover
- BP-189** Kit for converting 6-way conn. to 7-way

7-Way Color-Coded Connector Assembly


Complete with color-coded 7-way cable, terminal block, and right angle mounting bracket.

- BP-190** Connector assembly complete
- BP-191** Connector with bracket
- BP-192** Car end (male)
- BP-193** Trailer end (female)
- BP-194** Bracket only
- BP-195** Color coded cable, per foot
- BP-196** Terminal block with cover

Bulbs

- BP-160** 3-21 c.p., 6-8 v. **BP-165** 21 c.p., 6-8 v.
- BP-161** 21-6 c.p., 12 v. **BP-166** 21 c.p., 12 v.
- BP-162** 21-6 c.p., 6-8 v. **BP-167** 2 c.p., 6-8 v.
- BP-163** 3 c.p., 6-8 v. **BP-168** 1.5 c.p., 12 v.
- BP-164** 3 c.p., 12 v.


Leslie's **THE SOUTH'S FIRST and FINEST**

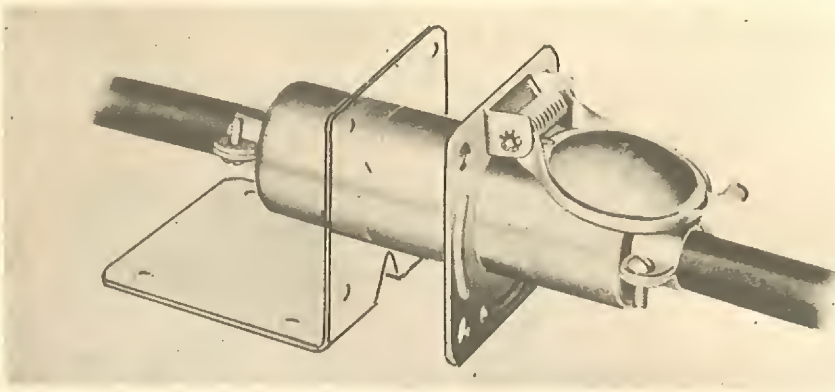

MARVEL 6-WAY CONNECTOR —

Fitted parts so grooved they assemble only one way—the right way. Foolproof wiring. Terminals so numbered that no error can be made in connecting car socket to trailer plug. Outside housing made of steel with heavy rust-proof plating. Cover hinged to live side of connector equipped with heavy spring that holds it firmly against face of connector when car is not attached to trailer, protecting it from all weather. Safety-locking device holds in firm grip so there is absolutely no chance for two parts to separate.

- M-7 Complete assembly, including mounting bracket. Wt. 1 1/2 lbs.
- M-8 Complete assembly, without mounting bracket. Wt. 1 1/2 lbs.
- M-9 Socket assembly (tow car end) Wt. 1 lb.
- M-10 Plug assembly (trailer-coach end) Wt. 1 lb.
- M-11 Mounting bracket. Wt. 1/4 lb.

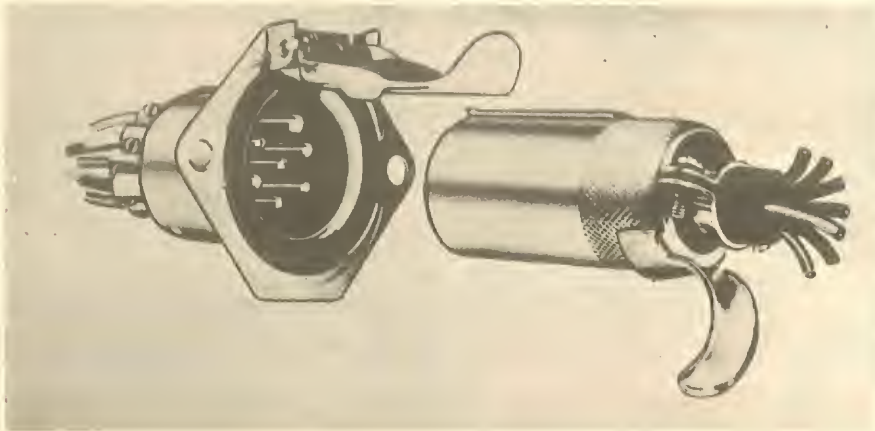

MARVEL HEAVY DUTY 7-WAY CONNECTOR

Meets all requirements of the Standard for the mobile home industry and used by the American Trucking Association. Replaceable molded bakelite interiors, new type self-aligning phosphor bronze contacts with large surface areas to eliminate current loss.



Spring lock cover holds unit tightly in position and provides weather protection. Special cable holding clamp. Heavy gauge, drawn steel case never warps or cracks. Cadmium plated to prevent binding and "freezing".

- M-31 Complete assembly. Wt. 2 1/2 lbs.
- M-32 7-way socket. Wt. 1 1/2 lbs.
- M-33 7-way plug. Wt. 1 1/2 lbs.

Marvel 110-Volt Outlet

This new development provides a trouble-proof receptacle and plug connecting the power circuit to the trailer-coach. It incorporates the same principles proved successful in the six-way connector.

- M-20 Plug assembly Wt. 1/2 lb.
- M-21 Socket assembly Wt. 1/2 lb.

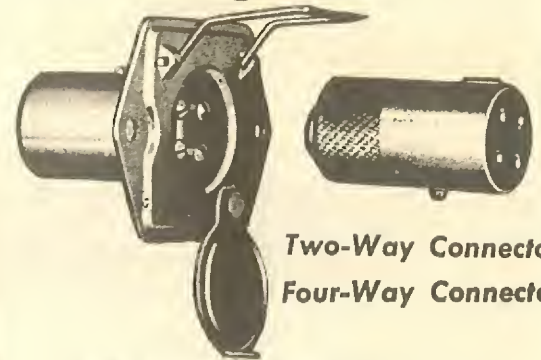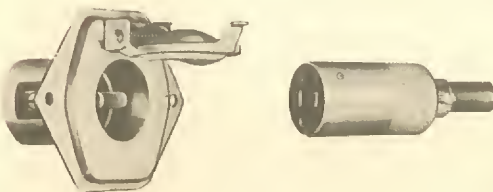

Two-Way Connector
Four-Way Connector

Carries light circuits from trailer to tow car. Socket is mounted to trailer hitch on tow car and plug is attached to front end of trailer. Spring wire clip locks plug securely into socket.

2-way connector carries tail light circuit, or other 6-volt connections, from trailer to tow car.

M-3 Socket assembly. Wt. 1/2 lb.

M-4 Plug assembly. Wt. 1/2 lb.

4-way connector handles 3 circuits—tail light, stop lights, and either electric brakes or interior lights. The 4th wire is used as a common ground.

M-5 Socket assembly. Wt. 1/2 lb.


M-6 Plug assembly. Wt. 1/2 lb.



Marvel Combination

Neat, attractive installation, designed for mounting direct to body of trailer, eliminating the necessity of brackets and other means of mounting. Incorporates both stop and tail lights, using separate bulbs. Black enamel finish. Complete with bulbs.

M-30 Wt. 3 lbs.

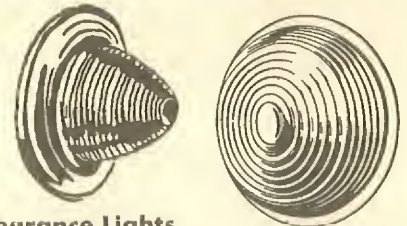

Clearance Lights

Beehive style. Diameter 3 5/8", depth 1 7/8". 6-8 volt. Aluminum Vehicle Finish. Bulb included.

Flat surface mounting, no connector hole drilling required. Flat, hugs inside the rub rail. Diameter 3 3/4", depth 1 3/8". Takes either 6 or 12-V bulb. Aluminum finish.

- G-1 Beehive clearance light with red lens.
- G-2 Beehive Clearance light with amber lens.
- G-3 Beehive lens, red.
- G-4 Beehive lens, amber.
- G-5 Flat clearance light with red lens.
- G-6 Flat clearance light with amber lens.
- G-7 Flat lens, red
- G-8 Flat lens, amber
- G-9 Lens gasket


Leslie's THE SOUTH'S FIRST and FINEST

Twist-Lock
TRADE-MARK



CONNECTORS

NEW SUPER 2-WIRE 20 amp., 250 volts



HH-3 (3221) 2-wire armored cap, male
HH-4 (3223) 2-wire armored body, female
NEW SUPER 3-WIRE 20 amp., 250 volts



HH-5 (3321) 3-wire armored cap, male
HH-6 (3323) 3-wire armored body, female




110-Volt Connector

A sturdy, well-constructed connector with genuine bakelite plug and socket to resist weather and corrosion. Diameter of body is $1\frac{3}{8}$ ".

CH-227 Socket
CH-228 Plug

FEATURING



Two-Prong Cord Connector

Ideal for use between tow car and trailer, and many other uses. Two-Prong.—Hard Rubber Cover.

CH-200 Wt. 8 oz.

TWO-WIRE-CONNECTORS-AND-PLUG-BASE



HH-1 (7101) 2-wire female connector
HH-2 (8808) 2-wire plug base, male

NEW SUPER 4-WIRE 20 amp., 250 volts



HH-7 (3421) 4-wire armored cap, male
HH-8 (3423) 4-wire armored cap, female



**RUBBER DROP CORD
MALE CONNECTOR**

X-3 Standard. Wt. 4 oz.

BARGMAN LOW COST SWITCH AND OUTLET COMBINATIONS

Ready for Connection to 110-Volt System



No. 206 Rotary Switch Assembly with stainless steel back plate.
Our No. B-206



No. 208 Single Outlet Assembly with Stainless Steel backplate.
Our No. B-208




No. 209 Double Outlet Assembly with stainless steel backplate.
Our No. B-209



No. 210 Single Outlet and Switch Assembly with stainless steel backplate.
Our No. B-210



No. 211 Double Outlet and Switch Assembly with stainless steel backplate.
Our No. B-211



Heavy-Duty Rubber Drop Cord Connectors

X-6 Female connector
X-9 Male connector



BARGMAN

Female Receptacle With Rubber Cover

No. 59 Female Receptacle with rubber cover and strain relief clamp. Double spring phosphor bronze terminals for positive contact. Insert removable for connecting wires to terminals. Takes heavy cable for outdoor use. Strain relief clamp reduces tension on individual wires.


BP-40

Leslie's

THE SOUTH'S FIRST and FINEST

with "Built-In" ground for "Peace-of-Mind" Safety.

LIFE-LINE Step-Down Converter-Adapters

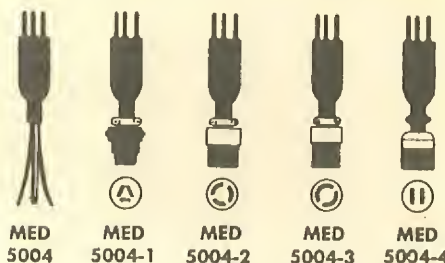


Bridges the gap between the standard 50 ampere, 3 wire 125/250 LIFE-LINE Park Receptacle—and the smaller capacity 2 and 3 wire appliance connectors used on older or small travel-type mobilehomes.

LIFE-LINE Step-Down Converter-Adapters

HL-20 (MED 5004)
HL-21 (MED 5004-1)
HL-22 (MED 5004-2)
HL-23 (MED 5004-3)
HL-24 (MED 5004-4)

MALE 4-WAY ADAPTER
(Same as HL-20, except 4-way)
HL-25 (MED 5005)

LIFE-LINE Extension Cables



These extensions are constructed of the same high quality material as the LIFE-LINE cable. Be sure to use only LIFE-LINE extensions with the LIFE-LINE assemblies to insure the best in electrical service entrance equipment.

LIFE-LINE Extension Cables

HL-30 (MED 5002-15) 15 ft. 110v
HL-31 (MED 5002-25) 25 ft. 110v
HL-32 (MED 5002-50) 50 ft. 110v
HL-35 (MED 5003-15) 15 ft. 125/250v
HL-36 (MED 5003-25) 25 ft. 125/250v
HL-37 (MED 5003-50) 50 ft. 125/250v

Cable and connector is factory-stripped and peeled for 10 minute "screw driver installation"



Service Entrance Assembly contains:

- Park Receptacle
- Temporary Adapter
- Connector and Power Supply Cable
- Cable Hatch
- Guarantee covering service and equipment
- All necessary parts for installation, nothing else to buy

Service Entrance Assemblies Complete

HL-50 Model "50", 110-volt, 50 ampere
HL-100 Model "100", 125/250-volt, 50 ampere

(1) PARK RECEPTACLES

HL-1 (MED 5000-1) 110-volt
HL-11 (MED 5001-1) 125/250 dual voltage

(2) TEMPORARY ADAPTER

HL-2 (MED 5000-2)

(3) MALE CONNECTOR w/25 ft. POWER SUPPLY CABLE

HL-3 (MED 5000-3) 110-volt conn. w/cable

HL-13 (MED 5001-2) 125/250-volt conn. w/cable


(4) CABLE HATCH

HL-4 (MED 5000-4A) Hatch for "50" assy.

HL-14 (MED 5000-4B) Hatch for "100" assy.

250-ft. Coils Flexible All Rubber Cable

Portable, durable, low priced, "S" type.



Heavy-Duty Lead-In Power Cords

Rubber pull-grip male attachment plug, free end cut flush.

X-15 10-gauge, 2-conductor, .550 OD Wt. 60 lbs.

X-22 12-gauge, 2-conductor, .450 OD Wt. 50 lbs.

X-42 14-gauge, 2-conductor, .500 OD Wt. 40 lbs.

INSULATED CORD

14-gauge, single conductor

G-55 Per foot

G-56 100-ft. spool

RUBBER CABLE

14-gauge, 4-conductor

G-64 Per foot

G-65 100-ft. spool

RUBBER CABLE

14-gauge, 6-conductor

G-68 Per foot

G-69 100-ft. spool

10-GAUGE, 2-CONDUCTOR

X-10 Per foot

X-11 Extension cord, 100 ft. Wt. 17 lbs.

X-12 Extension cord, 50 ft. Wt. 9 lbs.

X-13 Extension cord, 25 ft. Wt. 5 lbs.

X-14 Extension cord, 40 ft. Wt. 7 lbs.

8-GAUGE, 3-CONDUCTOR

BP-1 Per foot

12-GAUGE, 2-CONDUCTOR

X-20 Per foot

X-21 Extension cord, 100 ft. Wt. 15 lbs.

X-24 Extension cord, 40 ft. Wt. 6 lbs.

14-GAUGE, 2-CONDUCTOR

X-40 Per foot

X-41 Extension cord, 100 ft. Wt. 15 lbs.

X-44 Extension cord, 40 ft. Wt. 6 lbs.

16-GAUGE, 2-CONDUCTOR

X-60 Per foot

X-61 Extension cord, 100 ft. Wt. 10 lbs.

X-65 Extension cord, 50 ft. Wt. 5 lbs.

Leslie's

THE SOUTH'S FIRST and FINEST



ADHESIVES, COATINGS & SEALERS



3M SEALER EC - 1202

Tape Sealer, Reinforced with Fabric

1/16" thick x 100 ft. rolls

| ROLL Width | ROLLS PER CTN. |
|---------------|-------------------|
| 3/4" | 12 |
| 1" | 9 |

EC-1202 is a synthetic rubber tape-form sealer, reinforced with fabric. Forms a water-tight, gasket-like seal around window and door frames, along rain gutters, and where side and roof panels are screwed or riveted to structural members. Can also be used as an anti-squeak buffer between metal sections in automobiles and trucks, and for sealing overlapped seams on reinforced polyester fiber glass corrugated panels; is also adaptable for many other uses.


Cloth reinforcement gives this sealer-ribbon enough strength so that it does not stretch or sag when pulled during application; holds its shape and maintains the seal.

EC-1202 has sufficient adhesion to stay in place where it is applied, even in vertical or overhead positions. If improperly placed, it can be removed and replaced in the desired location.

EC-1202 offers several advantages over mastic-type sealers. It contains no solvent. Toxicity, fire hazard and shrinkage problems are minimized. It is easily applied. Since it is supplied in handy rolls of desired width, there is no need for special flow or pressure equipment.

After more than 1400 hours exposure in an accelerated weathering test machine, a 1/16" thick film showed no loss of adhesion to aluminum, and retained its resiliency and flexibility with but slight alligating of the ribbon surface. No corrosion or staining of the metal was evident under the EC-1202 film. EC-1202 is not resistant to oil, gasoline or similar solvents.

3M SEALER EC - 1279

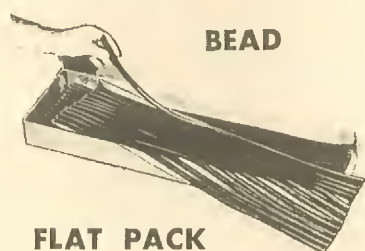

BEAD

FLAT PACK

1/4" thick x 30" lengths
(216 lengths per carton).



Non ravelling, high insulation qualities, free from pin holes, long life because impregnated with plenty of live rubber.

G-81 3/4" friction tape, 60 ft. roll

EC-1279 is a permanently soft, putty-like "thumbing" compound for filling wide seams, gaps and holes against dust, drafts and moisture; also provides a gasket-like seal between tightly-held faying surfaces.

EC-1279 is readily adapted to production line techniques. There is no need for special flow or pressure equipment. It is extruded in the desired bead size. Uniform beads are quickly laid with no waste of material.

EC-1279 is easy to handle; not sticky or messy in production handling, yet adheres well to steel, aluminum, glass and many other non-porous surfaces; stays permanently soft and pliable; has excellent resistance to water and atmospheric conditions; not intended for use on exposed seams of building panels without use of special overcoating which prevent soiling.

SCOTCH No. 33 Electrical Tape



66 ft. x 3/4 in. "ECONOMY" ROLL
Packed in an individual metal can
MM-50 3/4" elec. tape, 20 ft. roll
MM-51 3/4" elec. tape, 66 ft. roll

STRETCHY — conforms to irregular surfaces.

THINNESS — only 7 mils thick.


HIGH DIELECTRIC STRENGTH — 10,000 volts.

TOUGH — plastic backing is abrasion resistant, unaffected by water, oil, alkalies, alcohols, and most acids.

| "SCOTCH" No. 33 ELECTRICAL TAPE | PACKING | |
|------------------------------------|----------------------|---------------|
| | Per Can | Per Carton |
| 3/4 in. x 66 ft. | 1 | 12 |
| 3/4 in. x 20 ft. | 12 Rolls per tube | 144 |



SCOTCH MASKING TAPE

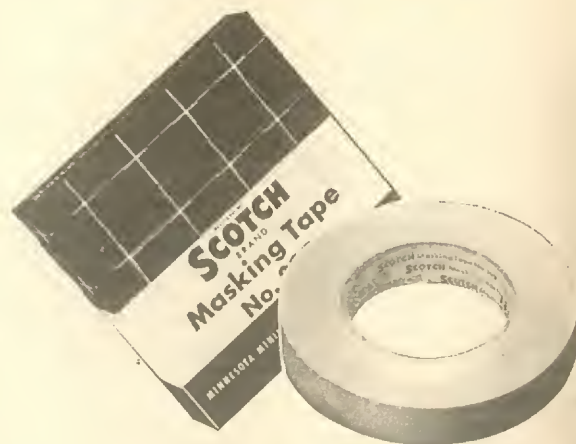

These Features Assure Top Masking Performance


1. INSTANT ADHESION
2. SECURE HOLDING
3. MOISTURE RESISTANCE
4. FLEXIBLE & CONFORMABLE
5. THIN
6. EASY, CLEAN REMOVAL
7. PROPER STRENGTH

MM-40 3/4" masking tape, 60 yd. roll
(48 rolls to carton)

Leslie's

THE SOUTH'S FIRST and FINEST

Made to Resist the Shocks and Bumps of Traveling



This new Humphrey GAS LAMP solves the problem of lighting for the mobile home owner who wants to travel beyond the power poles. No electrical connection needed—uses the same Bottle Gas employed for cooking and heating. A handsome fixture with many new features for mobile home use. Exclusive new shock-resistant "Beret" mantle assures long service life and minimizes breakage while traveling. New half-frosted globe gives more light and allows inspection of mantle. Beautifully finished in sparkling chrome. Lamp gives soft, white, natural light equal to a 50-watt electric bulb.


HT-3 Model 3-T LP gas lamp

HT-4 Half frosted globe



The No. 10 Beret soft tie on mantle will shrink to size of the standard pre-formed. It is recommended for all trailer car and other locations subject to jar and vibration. Put up three to an envelope.

HT-10 No. 10 Beret mantle



Our new Trailer Car burner nose is a combination of two parts in satisfactory use for many years in our Opalite Lamps. The No. 8 Mantle ring is heat proof cemented to the porcelain burner nose and Beret mantle tied in the groove of mantle ring. It may be substituted for the regular burner nose when soft mantles are preferred.

HT-7 No. 3-T Burner Nose.



The standard Humphrey No. 8 pre-formed Mantle will continue to be preferred in most fixed locations where long life is the rule.

HT-8 No. 8 pre-formed mantle

Fittings to Be Used with Gas Lamp

(see page 39 for illustrations)

- S-30 Three-way tee $\frac{3}{8}$ " o.d. x $\frac{3}{8}$ " f.p.t.
- S-40 Flared cap nut $\frac{3}{8}$ " o.d.
- S-51 Flared tube nut $\frac{3}{8}$ " o.d.
- S-135 Male conn. $\frac{1}{4}$ " o.d. x $\frac{1}{8}$ " m.p.t.
- S-136 Male conn. $\frac{3}{8}$ " o.d. x $\frac{1}{8}$ " m.p.t.

HUB industries

Beautiful Lighting Fixtures



Chrome ceiling light with switch and shade.

H-116 Fixture with shade, 8" opening

H-144 Glass shade only for 8" fixture

H-117 Fixture with shade, 6" opening

H-153 Glass shade only for 6" fixture

H-120 Fixture with shade, 4" opening

H-154 Glass shade only for 4" fixture

Weight on complete unit 2 1/2 lbs.

Weight on glass shade 1 1/2 lbs.

Chrome bathroom light with convenience outlet, wall mount.

H-119 Fixture with shade, Wt. 2 1/2 lbs.

H-145 Glass shade only, Wt. 1 1/2 lbs.

HL-135 Socket and switch assy. for bathroom fixtures



The distinctive charm of this fixture adds to beauty of any mobile home. Ebony back-plate.

H-180 Ebony grill over white shade.

H-181 Brass colored grill over red shade.

Swivel-type Wall Fixtures Single Bullet-Shades in Fibre Choice of 3 color combinations

H-171 Solid ebony cup and shade, Ebony back-plate.

H-173 Brass-color cup, white shade, ebony back-plate.


H-175 Solid green cup and shade, ebony back-plate.

H-177 Brass-color grill cup, white shade, ebony back-plate.

Chrome wall fixture with attractive glass shade.

H-160 Fixture Complete Wt. 3 lbs.

H-161 Glass shade only.

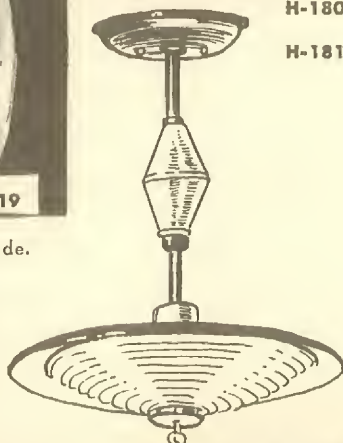


Pull-Down Fixture

Frosted glass shade for soft downward light. Upper shade of perforated metal with black matte finish. Crystal pull knob. Enclosed reel allows adjustment from 18" to 48" from ceiling.

H-185 Fixture Complete Wt. 3 lbs.

H-186 Glass shade for pull-down fixture

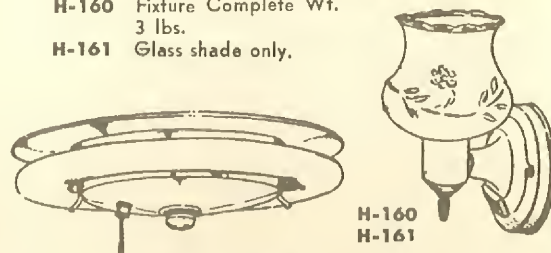

Chrome circline fluorescent fixture, pull switch, with bulb, 2 sizes.

H-126 9-in. fixture, Wt. 5 lbs.

H-127 13-in. fixture, Wt. 5 lbs.


H-155 13-in. bulb, 32 watt.

H-148 9-in. bulb, 22 watt.

H-149 Starter.

HL-130 Pull chain and switch

Leslie's THE SOUTH'S FIRST and FINEST

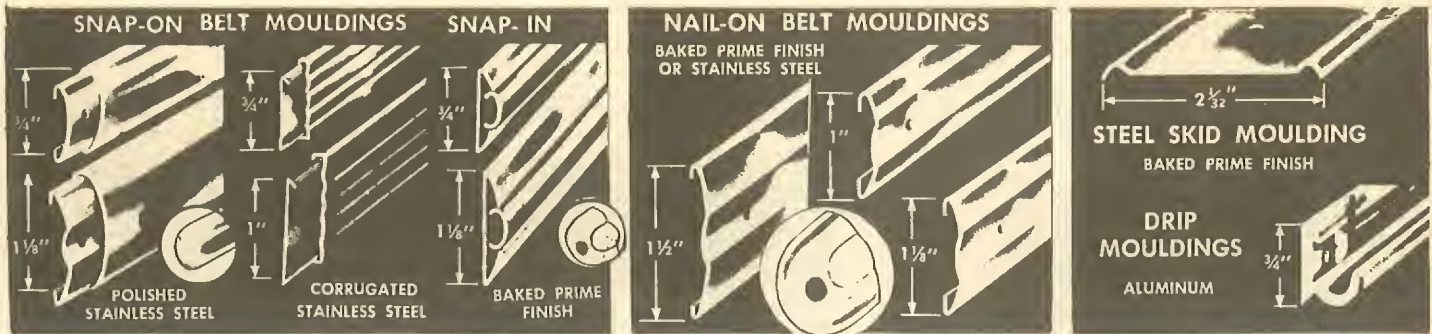

Snap-on Belt Moulding

Polished Stainless Steel 12' length.

- Z-21 3/4" moulding and filler
 Z-24 End clip
 Z-20 1 1/8" moulding and filler
 Z-25 End clip

Snap-on Belt Mouldings

Corrugated Stainless Steel 12' length.

- Z-32 3/4" moulding and filler
 Z-34 1" moulding and filler

Snap-in Belt Moulding

Baked prime finish. 16' length.

- Z-3 3/4" moulding
 Z-2 1 1/8" moulding
 Z-7 Filler
 Z-18 End Clip
 Z-19 End Clip

Nail-on Belt Moulding

Baked prime finish. 12' length. 4" hole spacing.

- Z-26 Inch moulding Z-29 End clip
 Z-27 End clip Z-30 1 1/2" moulding
 Z-28 1 1/8" moulding Z-31 End clip



L-Shaped Aluminum Moulding

125 gauge aluminum. 12' length.

- Z-38 15/16" moulding

Skid Moulding—Steel


Baked prime finish. 16' length.

- Z-11 2-1/32" moulding

Drip Moulding, Aluminum

12-foot length.

- Z-15 3/4" moulding
 Z-16 Red leather filler




Aluminum Roof Edging

125 gauge aluminum. 13' length.

- Z-40 1-1/16" x 5/8"

Cabinet Hinges and Locks

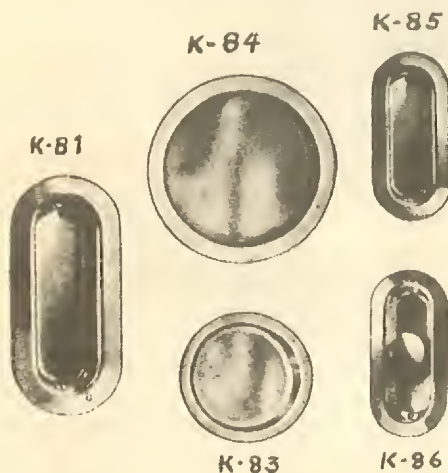

K-81 Oval, flush pull, 1 3/8" or larger doors; 4 1/8" x 2" x 1/2" deep; chrome finish.


K-83 Flush cup for cabinet doors; o.d. 1" x 1/4" deep; bright nickel finish.

K-84 Flush cup for cabinet and wardrobe doors;; o.d. 1-15/16" x 5/16" deep; chrome.

K-85 Flush pull for cabinet and wardrobe doors; 2 7/8" x 1 1/4" x 7/16" deep; brass.

K-86 KENNAPULL used with closed pocket installation: provides means of retracting door from wall pocket; 2 1/4" x 1-1/16" x 7/16" deep; chrome finish.

Wt. 4 oz. on all K catches

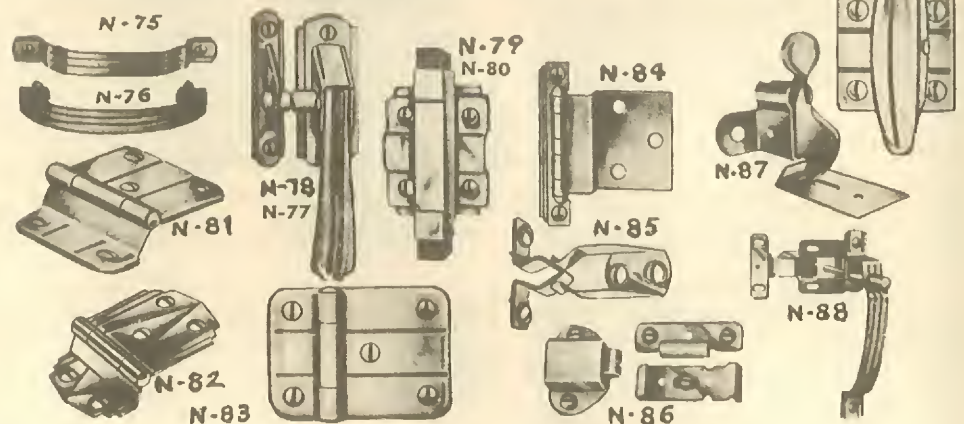

N-75 Brass drawer pull—overall length 4-1/16"

N-76 Brass drawer pull—overall length 4-1/16"

N-77 Steel reversible catch, for left or right hand door, FLUSH

N-78 Steel reversible catch, for left or right hand door, 3/8" OFFSET

N-79 Steel reversible cupboard catch, with Duralin tips, FLUSH

N-80 Steel reversible cupboard catch, with Duralin tips, 3/8" OFFSET

N-81 Steel cabinet hinge, 3/8" OFFSET

N-82 Steel cabinet hinge, 3/8" OFFSET

N-83 Steel cabinet hinge, FLUSH

Wt. 3 oz. on all N catches

N-84 Steel hinge for doors 3/4" thick (allows door to open 180°) semi-concealed, 3/8" OFFSET

N-85 Steel spring friction catch

N-86 Steel concealed friction catch (with both slides)

N-87 Steel elbow catch

N-88 Steel reversible cupboard catch — for right or left-hand door

N-90 Chrome Rocker cupboard catch—FLUSH


N-91 Chrome Rocker cupboard catch—1/4" OFFSET

N-92 Chrome Rocker cupboard catch—3/8" OFFSET

Leslie's

THE SOUTH'S FIRST and FINEST

1040-B FLUSH TYPE DOOR LOCK

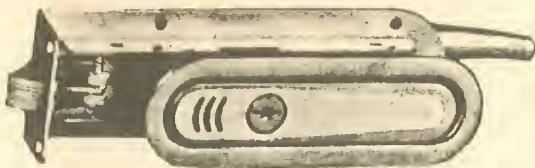

Outside view


When not in use the highly polished outside handle remains flush in its chrome plated well. Yet, the touch of a finger provides the means for operating the exclusive "rolling bolt" that assures easy closure and eliminates door slamming. Handle may be locked by sliding latch pin and closing door or with key. The unit can be unlocked from the outside with key. Has night latch feature, yet a turn of inside handle releases latch. Except when matching lock cylinders are desired, locks need not be ordered in pairs. Works on right or left hand doors.

- D-30 Decker lock No. 1040-B for door 1 1/2" thick
- D-31 Decker lock No. 1040-B for door 1 3/4" thick
- D-32 Decker lock No. 1040-B for door 2" thick

REPLACEMENT PARTS

- D-35 Lock cylinder w/2 keys
- D-36 Inner handle only
- D-37 Outside handle only
- D-38 Pull-back bar
- D-39 Inside cam and stud
- D-40 Keys, each
- D-41 Handle pin
- D-42 Spring for bolt
- D-43 Springs, right and left—per pair
- D-44 Connecting screws
- D-45 Inside half of lock
- D-46 Outside half of lock

(SPECIFY DOOR THICKNESS)



LOCK ASSEMBLIES WITH LOCKING HANDLE

Locking case with outside locking handle and inside handle. Has automatic "kick-off." Easy to install—fits flush on inside of door. Overall dimensions—4 3/8" wide x 4 1/8" high.

- V-14 Complete lock assembly. Wt. 3 lbs.
- V-15 Locking case only. Wt. 1 1/4 lbs.
- V-16 Inside handle only. Wt. 1/2 lb.
- V-17 Outside handle w/2 keys. Wt. 1 lb.



Screen Door Latch

Gentle push or pull opens door—checks slam—prevents rebound—keeps door closed. Simple to install. Only a screwdriver is needed. Also suitable for cabinets. Individually packed with screws for mounting.

- F-1 Wt. 6 oz.

1040-DK DOOR KNOB ASSEMBLY



Only one of its kind on the market at this price. Design of lock bolt eliminates slamming of door. Lock in door knob for easy access. Fits right or left doors. Eye-appealing chrome finish. Easy to install—two units to fasten with screws.

- D-48 Decker 1040DK for door 1 1/2" thick
- D-49 Decker 1040DK for door 1 3/4" thick
- D-50 Decker 1040DK for door 2" thick
- D-52 (X-1) Outside knob
- D-53 Outside knob washer
- D-54 (X-10) Outside knob snap-ring
- D-55 Outside knob lock cylinder
- D-56 Outside knob esc. plate
- D-57 (X-9) Outside knob gasket

606 JALOUSIE DOOR LOCK



Absolutely new—exclusively for mobile home jalousie doors.

Deadbolt latch assembly—can't come open in transit.

Panic escape feature on inside knob.

Universal to fit 1 1/4" to 1 3/4" thick doors, metal or wood.

Lock bolt extends full 1/2".

Back set 2 1/2" for jalousie door, standard door 5".

Chrome plated knobs and escutcheons.


Locking bolt and interior parts cold rolled steel, heavy plated.

For left and right hand doors.

Lock cylinder in center of recessed knob.

Solid 1" shaft from outside knob to inside knob.

- D-60 Decker Jalousie door lock No. 606

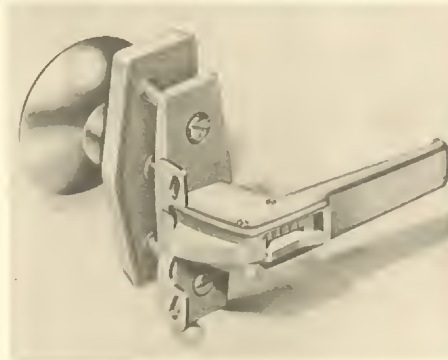


555 Decker Lock For inside doors.

No accidental lockout; finger tip control locking; easy installation; adjustable and reversible striker.

Wt. 1 1/2 lbs.

- D-70 Aluminum door lock
- D-72 Brass door lock


sliding door hardware

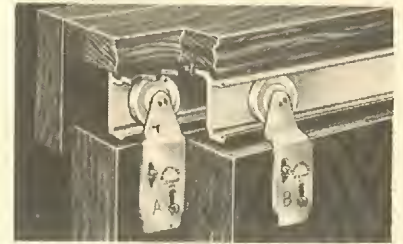

Now 1 packaged set for 3/4" and 1 3/8" doors; same track, hangers and guide. For 3/4" door installations use 3/8" offset hangers on front door and 1/16" offset hangers on back door. For 1 3/8" door installations simply reverse hangers which are clearly identified by stamp on back. New extruded heat treated aluminum track is sturdy and rust proof. Designed for jump-proof smooth performance. Sets include track, hangers, screws and door guide sets.

Our No. K-50 (2050)—with 48" track

- K-51 Hanger #2038, 1/16"
- K-52 Hanger #2039, 3/8"
- K-53 Double nylon guide #1204
- K-54 Nylon wheel #3013

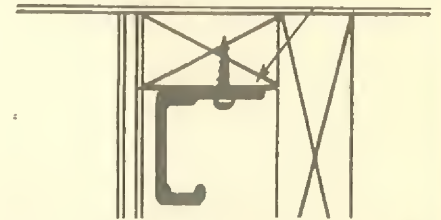


SINGLE DOOR TRACK ASSEMBLIES complete

with 48" track, hangers #2038 or #2039, nylon guide, guide screws, nylon wheel #3013.

- K-88 (#28) for doors up to 1 3/8"
- K-89 (#29) for doors 1 3/8" and heavier
- K-90 (#1203) single nylon guide


Kennalock for Sliding Doors



Modern design, simple to install Kennalock. For sliding doors. Automatic guide and latch helps assure perfect alignment. Recessed finger pull. Size 3/4" x 1" x 1 1/8".

- K-94 Brass. Wt. 1/2 lb.
- K-95 Chrome. Wt. 1/2 lb.

"RUBBER ROLLER" SPRING CATCH

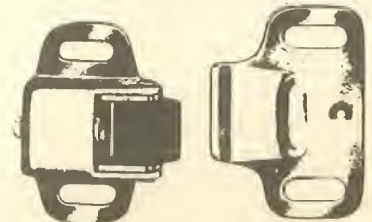

It's quiet—as it rolls and retracts to open or close. Cushioned by coiled spring action, the rubber roller glides smoothly over the strike and eases the door to a snug, silent stop.

- BG-1 "Rubber Roller" spring catch—small
- BG-2 "Rubber Roller" spring catch—large

Leslie's THE SOUTH'S FIRST and FINEST



BARGMAN'S VERTI-Lock For JALOUSIE DOORS

With 2 1/4" x 9 1/2" interior and exterior face plates which mount vertically . . . fits every style door. Designed with graceful simplicity inside and out, engineered for smooth, continuous performance, safety and security inside and out. Whether locked with key or interior locking lever, latch bolt is dead-locked into strike opening, and door is always securely locked from outside. Interior mechanism reversible to convert one hand of lock to opposite hand if required.


BP-275 (L-77) Jalousie door lock

L-77
VERTI-
LOCK



BP-280 (SP-77) Strike with bolt pocket

Bolt pocket permits full extension of bolt in door jamb . . . an essential feature for proper operation . . . of any door.

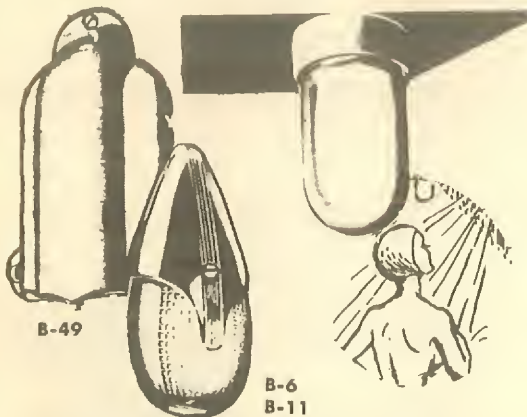

Bell-shaped Metal Porch Lite

Chrome finish. Easily mounted. B-7 Screw-lamp retained by spring tension. Wt. 1 1/4 lbs.

B-49 Porch Lite

Porch Lite with Glass Lens


Available with white or yellow bug-repellent lens. Streamlined design combining glass and chrome-plated metal. Uses standard B-7 lamp. Wt. 1 1/2 lbs.

- B-6 With white lens
- B-11 With yellow lens
- B-8 White lens only
- B-9 Yellow lens only
- B-10 Metal cover
- B-7 Bulb for both lites

Vapor-Proof Shower Lamp

Completely insulated against moisture. Wire leads sealed to terminals on porcelain base. Mounting screws furnished.

- B-95 Complete. Wt. 1 1/2 lbs.
- BP-32 Glass shade. Wt. 1/2 lb.
- BP-33 Porcelain base




NO. 22
PORCH LIGHT
ASSIST BAR
. . . designed to
match L-66 Lock.

Bargman 111 DH Door Stop


Heavy duty easy-action spring cushions stop without shock . . . door remains open at right angle. Simple, inexpensive installation. Two styles of bracket are available. Either style may be used with right or left hand doors.

BP-111 Door Stop with right angle bracket which mounts on inside flat surface of door.


BP-112 Door Stop with Z bracket which mounts over top of door.

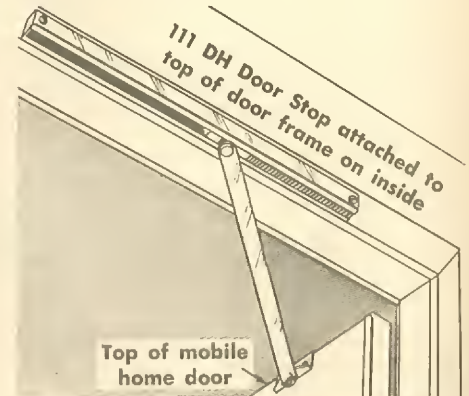

Brightspot



Robot-Light



Brightspot Auxiliary

6-8-12 volt fixture operates on automobile or hot shot dry cells battery. Complete with 21 candlepower lamp and rotary switch. Wt. 1 lb.

- B-26 Chrome Brightspot with 12-volt bulb
- B-27 Artone Brightspot with 12-volt bulb
- B-31 Artone Brightspot with 6-volt bulb
- B-39 Chrome Brightspot with 6-volt bulb
- B-35 Brightspot lens only

Robot-Light 110 Volt

Light your dark closets automatically. Porcelain socket with push-button switch that operates with opening and closing of door. Complete with 5 ft. rubber-covered extension cord.

B-38 Without lamp. Wt. 1 lb.

Chrome-Plate Assist-Bar-Light

Combination assist-bar and porch light uniting 2 trailer necessities. Wt. 1 1/4 lbs.

- B-97 Bar & Light
- B-98 Bar with 110 volt outlet
- B-99 Assist Bar only
- BP-197 Lens for assist bar light

NO. 22


PORCH LIGHT ASSIST BAR

"Hardware Harmony" by Bargman

Be Modern . . . Harmonize your Hardware with matched Door Locks and Assist Bars . . . attractive . . . yet practical additions to your front and rear doors.

BP-22 Assist bar and porch light

BP-23 Assist bar only

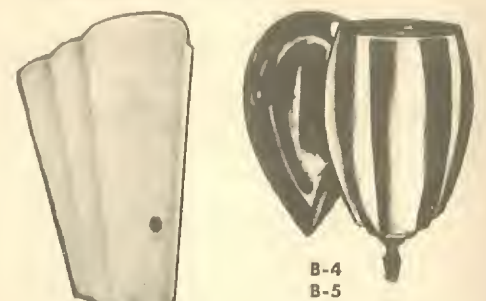

B-30 Shade only.

Smaller Wall Brackets

Metal. May be used with or without clip-on shades. With convenience outlet.

- B-4 Brown
- B-5 Chrome


B-30 Plastic half shade

Bakelite Bottom Turn Socket

For replacement in practically all light fixtures.

- B-40 Wt. 3 oz.
- B-12 Switch Knob only

B-93
B-94

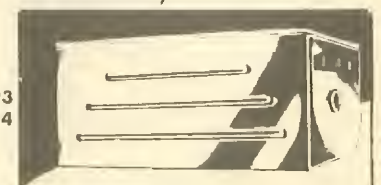

Chrome Cabinet Light

All metal fixture for bright illumination over sink. Easily installed on underside of cupboard. Rotary switch and lead wires attached. Wt. 1 lb.

- B-93 Complete.
- B-94 Plus convenience outlet.

Leslie's

THE SOUTH'S FIRST and FINEST




Bargman

All Locks Can Be Keyed
Alike in Pairs

Door Lock Assemblies

21

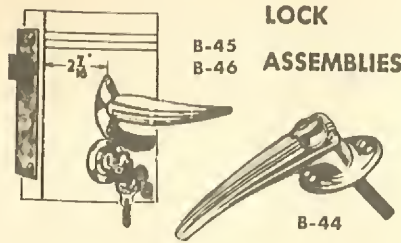

**LOCK
ASSEMBLIES**

B-45
B-46

B-44

Standard with leading trailercoach makers—has outside steel door handle, inside metal handle, rust-proof steel lock case, Yale cylinder, keys, guard plate for lock cylinder. Made of heavy gauge rust-proof steel. Wt. 2 1/2 lbs.

- B-45 (L-51) Left hand lock
- B-46 (L-50) Right hand lock
- REPLACEMENT PARTS**
- B-41 (C-9) Locking cylinder w/2 keys and cylinder plate
- B-42 (H-7) Outside handle only
- B-43 (R-10) Inside handle only
- B-44 (H-85) Outside locking handle w/2 keys
- B-47 Inside left hand lock case only for L-51 and L-55 locks
- B-48 Inside right hand lock case only for L-50 and L-54 locks
- B-50 Lock case spring

HAND-L-LOCK


Single-unit lock, retains all working parts between cast metal, chrome-plated interior and exterior face plates. The few working parts are, solid brass-forged bolt; brass pin-tumbler cylinder; steel deadlocking lever; cast-metal cam; assuring long, faultless service. The Inside Panic Bolt Release Handle offers the safety of quick exit from the coach. (One model fits both right and left hand doors.) Simple to install.

- B-306 (L-66) Wt. 3 1/2 lbs.
- B-307 (L-66 w/bolt trap strike) Wt. 4 lbs.
- REPLACEMENT PARTS**
- B-310 (L-66-2) Outside handle
- B-311 (BPL-66-2) Inside handle
- B-312 (L-66-6) Latch bolt
- B-313 (L-66-3) Locking lever
- B-314 (L-66-15) Guide plate
- B-315 (BPL-66-1) Inside plate
- B-316 (L-66-1) Outside plate
- B-317 (L-66-14) Cylinder w/2 keys
- B-318 (BPL-66-7) Inside safety latch
- B-319 (L-66-9) Cam
- B-320 (L-66-8) Handle spring
- B-321 (L-66-10) Latch bolt spring
- B-322 Screws for L-66-15 guide plate

**LOCK
ASSEMBLIES**

Ultimate in trailer door locks, surpasses anything in trailer door hardware. Beautiful, ruggedly built for lasting service. Assembly includes streamlined locking handle, inside panic bolt handle, escutcheon plate (chrome plated) Hurd lock cylinder, keys, rust-proof lock case. Wt. 3 lbs.

- B-51 (L-54) Right hand lock complete
- B-52 (L-55) Left hand lock complete
- REPLACEMENT PARTS**
- B-47 Inside left hand lock case only for L-55 and L-51 locks
- B-48 Inside right hand lock case only for L-54 and L-50 locks
- B-53 (H-20) Outside handle assy.
- B-54 (C-10) Cylinder w/2 keys
- B-55 (H-20-2) Outside handle—casting only
- B-56 (H-20-2) Outside handle—with shank

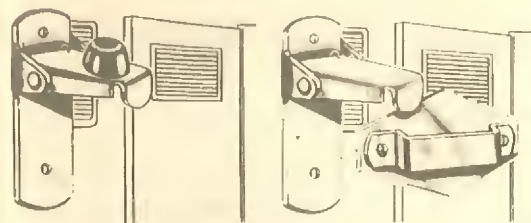

**SP-66 ADJUSTABLE
STEEL STRIKE**

Available in two bolstered lip dimensions: SP-66-B with 3/8" lip; SP-66-C with 1/2" lip. Easily adjustable for perfect alignment between lock bolt and strike plate.

BP-66 (SP-66) Adjustable steel strike

Catch-Bumper Assembly

Designed to catch the formed edge of door; eliminating the necessity of using holding devices on the door itself. Metal parts are cadmium plated. Attached bumper of prime quality rubber prevents the trailer door from striking body.

B-205 (C-14-L) Wt. 4 oz.

Catch-Latch Assembly

Of durable cadmium plated steel to withstand elements. Spring catch hinged on back plate and latch plate with loop for catch. Has holes for screws. Holds trailer doors to walls, preventing door accidents.

B-64 (C-18) Wt. 4 oz.

Rubber Door Bumper

Made of quality rubber has counter-sunk screw, suitable for mounting on metal, wood, or synthetic wall-board. Offers insurance to trailer beauty by preventing doors from colliding against walls.

B-63 (B-23) Wt. 2 oz.

Door Bumper and Holder

Combination outside door bumper — exterior handle holder. Has solid rubber tip, protects both door and trailer body from damage. Guard holds trailer door open, flat against wall. To be mounted with door handle holder pointing downward. Easy three-screw installation.

B-34 (B-17) Wt. 4 oz.



**S-60 "BOLT TRAP"
DOOR STRIKE**

An important complement to the L-66 Hand-L-LOCK, the S-60 Door Strike has a "bolt trap" in a rugged cast metal plate 1/8" thick. It is provided with countersunk screw holes to stabilize its installation.

Our No. B-37 Wt. 4 oz.



**S-20 "ONE-STEP"
DOOR STRIKE**

Made of durable cast metal; incorporating counter-sunk screw holes for neat-fitting stable attachment; the S-20 is a single-stage door strike furnished specifically for doors 1" to 1 1/2" thick.

Our No. B-32 Wt. 3 oz.



**S-19 "TWO-STEP"
DOOR STRIKE**

The S-19 is designed for doors of 1 1/2" thickness or over. Made of cast metal, this two-stage door strike assures rugged service in keeping with Bargman Door Lock and Hand-L-LOCK Assemblies.

Our No. B-33 Wt. 3 oz.

Bargman Service Kits

KIT No. 2—for L-66 Hand-L-LOCK only.

Consists of 1 outside plate, 1 outside handle, 3 latch bolts, 1 handle spring, 1 cam, 1 latch bolt spring, 2 cylinders with 2 sets of keys, 1 guide plate with screws, 1 inside plate, 1 inside handle, 1 inside safety latch and 1 strike. Wt. 4 lbs.

Our B-58 Wt. 4 lbs.

For service when you need it! All parts wrapped separately and easily identified. Kits you cannot afford to be without!


KIT No. 3—for all other Bargman Locks

Consists of 4 cylinders with screws, 4 inside handles with screws, 1 outside handle less shank, 4 lock case springs, and 1 outside handle spring.

Our B-59 Wt. 2 1/2 lbs.

Leslie's

THE SOUTH'S FIRST and FINEST

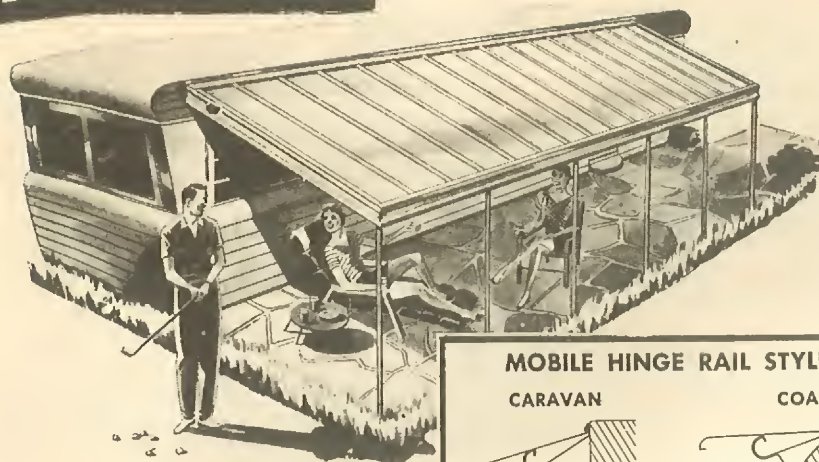

Travel-Awn the luxurious ROYAL



ROYAL Travel-Awn

| Our No. | Size | Our No. | Size |
|---------|----------|---------|-----------|
| UR-722 | 7' x 22' | UR-920 | 9' x 20' |
| UR-724 | 7' x 24' | UR-922 | 9' x 22' |
| UR-726 | 7' x 26' | UR-924 | 9' x 24' |
| UR-728 | 7' x 28' | UR-926 | 9' x 26' |
| UR-730 | 7' x 30' | UR-928 | 9' x 28' |
| UR-732 | 7' x 32' | UR-930 | 9' x 30' |
| UR-734 | 7' x 34' | UR-932 | 9' x 32' |
| UR-736 | 7' x 36' | UR-934 | 9' x 34' |
| UR-738 | 7' x 38' | UR-936 | 9' x 36' |
| UR-740 | 7' x 40' | UR-938 | 9' x 38' |
| UR-810 | 8' x 10' | UR-940 | 9' x 40' |
| UR-812 | 8' x 12' | UR-942 | 9' x 42' |
| UR-814 | 8' x 14' | UR-944 | 9' x 44' |
| UR-816 | 8' x 16' | UR-1010 | 10' x 10' |
| UR-818 | 8' x 18' | UR-1012 | 10' x 12' |
| UR-820 | 8' x 20' | UR-1014 | 10' x 14' |
| UR-822 | 8' x 22' | UR-1016 | 10' x 16' |
| UR-824 | 8' x 24' | UR-1018 | 10' x 18' |
| UR-826 | 8' x 26' | UR-1020 | 10' x 20' |
| UR-828 | 8' x 28' | UR-1022 | 10' x 22' |
| UR-830 | 8' x 30' | UR-1024 | 10' x 24' |
| UR-832 | 8' x 32' | UR-1026 | 10' x 26' |
| UR-834 | 8' x 34' | UR-1028 | 10' x 28' |
| UR-836 | 8' x 36' | UR-1030 | 10' x 30' |
| UR-838 | 8' x 38' | UR-1032 | 10' x 32' |
| UR-840 | 8' x 40' | UR-1034 | 10' x 34' |
| UR-910 | 9' x 10' | UR-1036 | 10' x 36' |
| UR-912 | 9' x 12' | UR-1038 | 10' x 38' |
| UR-914 | 9' x 14' | UR-1040 | 10' x 40' |
| UR-916 | 9' x 16' | UR-1042 | 10' x 42' |
| UR-918 | 9' x 18' | UR-1044 | 10' x 44' |



Sloping Side Panels

Add rich finishing touch at a small extra cost.

Awning Width

| | |
|-------|---------|
| U-703 | 7 feet |
| U-704 | 8 feet |
| U-705 | 9 feet |
| U-706 | 10 feet |

Leslie's

MOBILE HINGE RAIL STYLES

CARAVAN




Side-Mounted
—Type MHA



Top-Mounted
—Type MHB

COACH



Low-Crown
—Type MHC



High Crown
—Type MHD

Hinge rails are made in four styles to fit most any make trailer when mounted in straight line and parallel to the floor. Be sure to include type wanted and height of trailer.

MOBILE Travel-Awn

| Length in ft. | 5 to 6 feet | 6 to 7 feet | over 7 ft. |
|---------------|-------------|-------------|------------|
| 8 | UM-508 | UM-608 | UM-708 |
| 10 | UM-510 | UM-610 | UM-710 |
| 12 | UM-512 | UM-612 | UM-712 |
| 14 | UM-514 | UM-614 | UM-714 |
| 16 | UM-516 | UM-616 | UM-716 |
| 18 | UM-518 | UM-618 | UM-718 |
| 20 | UM-520 | UM-620 | UM-720 |
| 22 | UM-522 | UM-622 | UM-722 |
| 24 | UM-524 | UM-624 | UM-724 |
| 26 | UM-526 | UM-626 | UM-726 |
| 28 | UM-528 | UM-628 | UM-728 |
| 30 | UM-530 | UM-630 | UM-730 |
| 32 | UM-532 | UM-632 | UM-732 |
| 34 | UM-534 | UM-634 | UM-734 |
| 36 | UM-536 | UM-636 | UM-736 |


ALL ORDERS SHIPPED FROM GALION, OHIO
PRICES F.O.B. GALION, OHIO

* * *

Listed hereunder are a few representative shipping weights of these awnings.

| | | | |
|----------|--------------|-----------|--------------|
| 7' x 20' | Wt. 147 lbs. | 9' x 22' | Wt. 220 lbs. |
| 7' x 30' | Wt. 217 lbs. | 9' x 30' | Wt. 278 lbs. |
| 8' x 22' | Wt. 178 lbs. | 9' x 34' | Wt. 299 lbs. |
| 8' x 30' | Wt. 230 lbs. | 9' x 40' | Wt. 325 lbs. |
| 8' x 34' | Wt. 250 lbs. | 10' x 30' | Wt. 295 lbs. |
| 8' x 40' | Wt. 310 lbs. | 10' x 40' | Wt. 347 lbs. |

Price Quotations Gladly Submitted for Awning Sizes Not Listed



Auger-Type Ground Anchors

Will support poles securely where concrete or wooden floors are not used.

U-702 Wt. 3 lbs.

Aluminum Awnings

"Lifetime" Aluminum means:

- Beautiful • Lightweight • Cool
- No Upkeep • No Sagging • No Flapping
- Fire Proof • Mold Proof • Vermin Proof

Travel-Awn sturdy, tubular construction. Weather-proof without caulking.

Panels are 12 inches wide easily carried in trailer when moving. Comes to you complete to the last bolt. With adjustable poles and floor flanges. Designed to fit almost any trailer having regular canvas-type awning rail.

The entire unit is pre-assembled at plant. All panels are numbered and marked and slide and snap together in a simple manner with minimum of bolts.

Awning can also be installed direct to trailers without the need of a canvas type awning rail, but indication must be given when order is placed. The "Neoprene" will then be left out of the eave attachment and sheet metal screws will be furnished for screwing the eave attachment directly to the trailer. Please indicate if direct mounting will be made on TOP or on SIDE of trailer or on COACH TYPE.

Manufacturing conditions are such that the assembled awning may measure up to two inches longer or shorter than the size ordered; manufacturer also reserves the right to make minor design changes and improvements without notice whenever the change is considered for the betterment of the product.

TRAVEL-AWN Aluminum WINDOW AWNINGS

| Length in inches along trailer | 24" wide projection out | 30" wide projection out |
|--------------------------------|-------------------------|-------------------------|
| 18" | U-1824 | U-1830 |
| 24" | U-2424 | U-2430 |
| 30" | U-3024 | U-3030 |
| 36" | U-3624 | U-3630 |
| 42" | U-4224 | U-4230 |
| 48" | U-4824 | U-4830 |
| 54" | U-5424 | U-5430 |
| 60" | U-6024 | U-6030 |
| 66" | U-6624 | U-6630 |
| 72" | U-7224 | U-7230 |
| 78" | U-7824 | U-7830 |
| 84" | U-8424 | U-8430 |
| 90" | U-9024 | U-9030 |
| 96" | U-9624 | U-9630 |
| 102" | U-10224 | U-10230 |
| 108" | U-10824 | U-10830 |
| 114" | U-11424 | U-11430 |
| 120" | U-12024 | U-12030 |
| 126" | U-12624 | U-12630 |
| 132" | U-13224 | U-13230 |
| 138" | U-13824 | U-13830 |
| 144" | U-14424 | U-14430 |
| 150" | U-15024 | U-15030 |
| 156" | U-15624 | U-15630 |

HOW TO MEASURE—If a window is 29" wide (Horizontally) between frame edges, a 30" length awning will fit, but a 36" long awning will give better protection and appearance. Therefore allow at least one inch extra or more beyond window frame on each side.


HOW TO ORDER—If window is more than 48" wide, please indicate if divided in two, three or more sections. Standard attachment includes eave rail installed in place of, or above, drip mold by means of sheet metal screws furnished. If canvas track rail is already on trailer show "TO FIT CANVAS AWNING RAIL."

THE SOUTH'S FIRST and FINEST

Vivatex Treated Duck Awnings for Mobile Homes

23

ACCESSORIES for AWNINGS

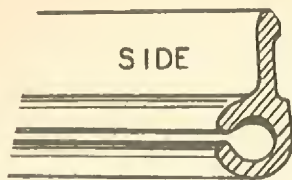

Aluminum Awning Rails

| | Length |
|-------|--------|
| BA-10 | 10-ft. |
| BA-12 | 12-ft. |
| BA-14 | 14-ft. |
| BA-16 | 16-ft. |
| BA-18 | 18-ft. |
| BA-20 | 20-ft. |

SCREWS for awning rails.

Use 3 screws to the foot.

BA-41 per dozen

BA-64 per gross

POLES. Wt. 4 1/2 lbs.

BA-26 "Arabian" spear-head steel pole.

BA-30 7-ft. adjustable standard steel pole.

BA-34 Galvanized Steel Guy Line

GUY-ROPES. Mildew-resistant with metal adjustable slides.

BA-28 Single. Wt. 1/2 lb.

BA-29 Double. Wt. 1/2 lb.

GUY-ROPE SLIDES. Galvanized.

BA-32 Wt. 1/4 lb.

GUY-ROPE SPRINGS. For keeping guy-ropes taut.

BA-33 Wt. lb.

STAKE, 20" angle-iron.

BA-27 Wt. lb.

DUCK. Untreated. No. 12. Wt. 11.45 per sq. yd.

BA-24 10-ft. wide. yd.

BA-25 9-ft. wide. yd.

PRESERVO. Waterproofs canvas, leaving it soft and pliable.

BA-50 Gal. Wt. 7 1/2 lbs.

BA-51 Qt. Wt. 1 1/4 lbs.

EVERSEAL. Sealing Strip used between awning moulding and body of trailer to prevent leaks. 1-inch wide.

BA-40

per foot

BA-62

100-ft. roll

AWNING LIFT



Awning Lift to eliminate your Awning tears. Installed in upper corner of outer door.

F-5

Price Quotations Gladly Submitted for Window Awnings

Please give exact size of window (outside dimensions—height and width). Specify type of windows—whether hinged top or side, or picture group with casement windows.



Deluxe Canvas Awnings

10-oz. Duck. Mildew-resistant and water-repellent. Made with 12" scalloped valances on sides and front. Complete with adjustable front bar, full-length adjustable poles, guy-ropes with slides and guy-rope springs, and 20" stakes. The front bar allows you to "style" your awning front to suit your needs.

| | | | |
|--------|----------|---------|-----------|
| BA-810 | 8' x 10' | BA-936 | 9' x 36' |
| BA-812 | 8' x 12' | BA-938 | 9' x 38' |
| BA-814 | 8' x 14' | BA-940 | 9' x 40' |
| BA-816 | 8' x 16' | BA-1012 | 10' x 12' |
| BA-818 | 8' x 18' | BA-1014 | 10' x 14' |
| BA-820 | 8' x 20' | BA-1016 | 10' x 16' |
| BA-912 | 9' x 12' | BA-1018 | 10' x 18' |
| BA-914 | 9' x 14' | BA-1020 | 10' x 20' |
| BA-916 | 9' x 16' | BA-1022 | 10' x 22' |
| BA-918 | 9' x 18' | BA-1024 | 10' x 24' |
| BA-920 | 9' x 20' | BA-1026 | 10' x 26' |
| BA-922 | 9' x 22' | BA-1028 | 10' x 28' |
| BA-924 | 9' x 24' | BA-1030 | 10' x 30' |
| BA-926 | 9' x 26' | BA-1032 | 10' x 32' |
| BA-928 | 9' x 28' | BA-1034 | 10' x 34' |
| BA-930 | 9' x 30' | BA-1036 | 10' x 36' |
| BA-932 | 9' x 32' | BA-1038 | 10' x 38' |
| BA-934 | 9' x 34' | BA-1040 | 10' x 40' |

Price Quotations Gladly Submitted

for Awning Sizes Not Listed

Membrane; a close weave asphalt impregnated cloth to be used in conjunction with SPECIAL ADHESIVE.

E-130 6" wide by 150' long.

Per roll

E-131 Cut to order (6").

Per foot

E-132 12" wide by 150' long.

Per roll

E-133 Cut to order (12").

Per foot

Special Adhesive, a black liquid bonding cement for patching roofs. Very strong in adhesive qualities; used to hold membrane in place when patching a crack, loose or torn material, seams, or over nails in a roof that are working loose; applied with ordinary brush onto bad surface and the membrane is applied directly into it; work adhesive over edges of membrane as that is to be covered.

E-120 Pint. Wt. 2 lbs.

E-121 Quart. Wt. 3 lbs.

E-122 Gallon. Wt. 10 lbs.

E-123 5 Gallons. Wt. 46 lbs.

10-oz. U. S. Army Duck
Vivatex treated to resist weather
Painted in a choice of
20 solid colors and patterns.
Color Swatch Samples
gladly furnished




Self-Supporting Canvas Awnings

No guy-ropes or stakes needed, and gives you more room on lawn. The adjustable top rafter supports are made with spring tension to hold awnings out from trailer. Complete with lightweight steel tubing frame, adjustable metal front bar, rafters, and "Arabian Spear-head" adjustable upright poles with positive screw locks. Poles fasten down with small steel pins (included), to prevent wind from lifting bottom ends off ground. 10-oz. duck, mildew-resistant and water-repellent.

| | | | |
|--------|----------|---------|-----------|
| BS-810 | 8' x 10' | BS-932 | 9' x 32' |
| BS-812 | 8' x 12' | BS-934 | 9' x 34' |
| BS-814 | 8' x 14' | BS-936 | 9' x 36' |
| BS-816 | 8' x 16' | BS-938 | 9' x 38' |
| BS-818 | 8' x 18' | BS-940 | 9' x 40' |
| BS-820 | 8' x 20' | BS-1012 | 10' x 12' |
| BS-822 | 8' x 22' | BS-1014 | 10' x 14' |
| BS-824 | 8' x 24' | BS-1016 | 10' x 16' |
| BS-826 | 8' x 26' | BS-1018 | 10' x 18' |
| BS-828 | 8' x 28' | BS-1020 | 10' x 20' |
| BS-912 | 9' x 12' | BS-1022 | 10' x 22' |
| BS-914 | 9' x 14' | BS-1024 | 10' x 24' |
| BS-916 | 9' x 16' | BS-1026 | 10' x 26' |
| BS-918 | 9' x 18' | BS-1028 | 10' x 28' |
| BS-920 | 9' x 20' | BS-1030 | 10' x 30' |
| BS-922 | 9' x 22' | BS-1032 | 10' x 32' |
| BS-924 | 9' x 24' | BS-1034 | 10' x 34' |
| BS-926 | 9' x 26' | BS-1036 | 10' x 36' |
| BS-928 | 9' x 28' | BS-1038 | 10' x 38' |
| BS-930 | 9' x 30' | BS-1040 | 10' x 40' |

"STORMY WEATHER" Lasting Protection Against WEATHER and MILDEW

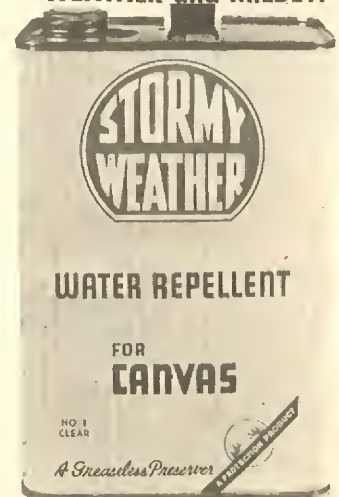

The "dry" water repellent that does not stiffen canvas; easy to use; coverage averages 100 to 120 sq. ft. per gallon—varying according to condition of fabric; from 6% to 20% is added to the tensile strength of canvas thread when treated with "Stormy Weather."

SW-1 One-gallon can

Wt. 8 lbs.

Leslie's

THE SOUTH'S FIRST and FINEST

Accessories to Beautify THE MOBILE HOME



auto-fold
LEG-O-MATIC



Leg-O-Matic Chairs fold like magic

Chair automatically triple folds when you press the spring underneath chair. Folded Size: Only 18½ x 5½ x 16". (Note that front and rear legs are folding into bottom of seat . . . Seat and Back join together).

Made of hard birch and maple, with a wheat finish. Plastic coverings in red, green, yellow, ivory, coral, and chartreuse.

L-1 Chair. Wt. 11 lbs.

L-3 Arm Chair. Wt. 14 lbs.



—raise
or lower

No dismantling—

Clear-Beam TV Antennas

Featuring the Rhombat—an antenna designed for peak performance on all channels in any area. Receives picture signals up to 125 miles. Eliminates ghosting, snow and electrical disturbances. On permanent, simple installation—raise for reception, lower for travel. The telescoping masts are Cadmium plated steel, self-supporting without guy wires and when opened extends 7 feet over trailer roof.

CB-1 Antenna, telescoping mast, 25-ft. lead-in wire, clamps, mounting brackets, bolts, screws and detailed instruction sheet. Wt. 10 lbs.



Unfinished
Drop-Leaf
Tables

Table tops are made from ½ inch 5 ply, matching grain birch plywood; end panels are 3 ply ¼ inch birch plywood; legs are heavy sound wood. Tables are set up, very smoothly sanded, ready for finishing if you so desire. Two swinging legs. Constructed to afford rigid stability. Six well-anchored heavy hinges hold drop-leaves. Top opens to 24" x 39". Folds to 13½" x 24" and is 30" high. The 3-drawer table has side panels covering the sliding drawers. Smooth pulling drawers are deep and long to give maximum storage.

P-40 No drawers. Wt. 24 lbs.

P-41 1-drawer. Wt. 26 lbs.

P-42 3-drawer. Wt. 30 lbs.

NORRIS "STREAM LINE" STEPS



2-Step & Rail—

Our No. N-1 (2S) 2-step without rail. Wt. 10 lbs.

Our No. N-2 (2SR) 2-step with rail. Wt. 48 lbs.

Our No. N-3 (1SP) 1-step platform. Wt. 50 lbs.

Our No. N-4 (1SPR) 1-step platform and rail. Wt. 59 lbs.

Our No. N-5 (DISPR) Dbl. 1-step platform and rail. Wt. 73 lbs.

Our No. N-6 (3S) 3-step only. Wt. 60 lbs.

Our No. N-7 (3SR) 3-step with rail. Wt. 70 lbs.

Our No. N-8 (2SP) 2-step platform. Wt. 78 lbs.

Our No. N-9 (2SPR) 2-step platform and rail. Wt. 90 lbs.

Our No. N-10 (D2SPR) Dbl. 2-step platform and rail. Wt. 115 lbs.




Double 2 Step
Platform and Rail—

Metal
Folding Chairs
with
Padded Seats



Brown steel frame, wide seat padded with foam rubber, brown plastic upholstery; seat size 12½" x 14¾".

F-10 Wt. 10 lbs.

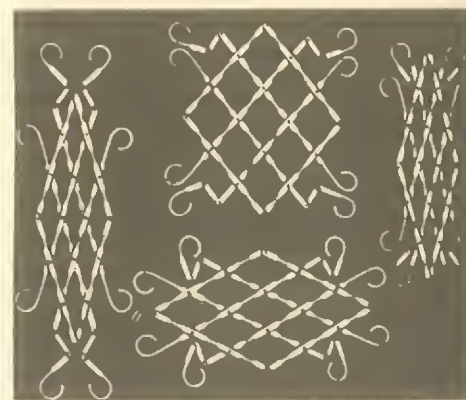


Art Craft Door Grilles

Adjustable in Width and Height

High grade steel, aluminum color. Made with pivot joints, expand in both directions, accordion fashion, to fit panels of varying sizes. When the width is greater than height, grill should be adjusted cross-wise.

AG-25 Wt. 5 lbs.



Tempered Aluminum Door Grilles


Bright finish, light-weight, but sturdy grilles to protect your screen doors. Available in 2 sizes.

SG-1 Size 20 x 25" high. Wt. 1½ lbs. SG-2 Size 20 x 21" high. Wt. 1½ lbs.

Leslie's

THE SOUTH'S FIRST and FINEST

Venetian Blinds

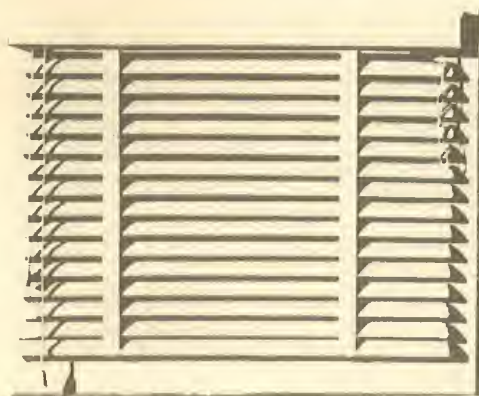


Flexalite Aluminum Blinds 1 1/2" Slats

Flexalum aluminum slats; operated by worm-gear tiltor, and have decorative fascia board heading.

| | Size | Wt. |
|------|---------|------------|
| A-60 | 26 x 20 | 4 1/2 lbs. |
| A-61 | 32 x 20 | 5 lbs. |
| A-62 | 35 x 20 | 5 lbs. |
| A-63 | 42 x 20 | 5 1/4 lbs. |
| A-64 | 44 x 20 | 5 1/4 lbs. |
| A-65 | 48 x 20 | 5 1/2 lbs. |
| A-66 | 50 x 20 | 5 1/2 lbs. |
| A-67 | 60 x 20 | 6 1/2 lbs. |
| A-68 | 70 x 20 | 7 1/2 lbs. |

Venetian Blind Accessories


- A-90 Nylon cord, per yard
- A-93 Nylon cord, per 1,000 yd. spool
Wt. 5 lbs.
- A-95 Tape for 1 1/2" slats, per yard
- A-96 Tape for 1 1/2" slats, per
72 yd. roll. Wt. 4 lbs.
- A-98 Tape for 2" slats, per yard
- A-99 Tape for 2" slats, per
72 yd. roll. Wt. 4 lbs.

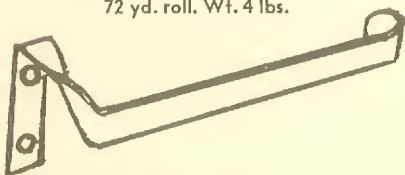

Metal Drapery Rods

A sturdy metal rod made for trailer windows. Hardens when bent. Extends from the wall making it ideal for use with Venetian Blinds or roller shades. Weight 1/2 lb.

- CC-12 2 7/8" extension, 6 1/2" arm.
- A-88 3 1/4" extension, 8" arm.

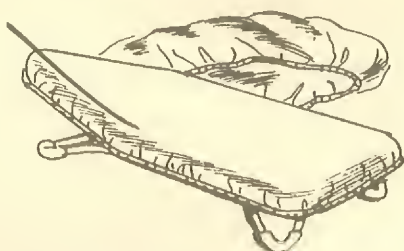

Portable Metal Ironing Board and Cover

All-metal ventilated board 12" x 36". Collapsible legs that lock firmly open or closed, with rubber feet. Heavy quilted cotton pad, sanforized cover, plus plastic cover to keep board clean when not in use.

- F-40 Wt. 8 lbs.



MONITOR

HANDSOME TWIN UNITS

MONITOR "JET" fully automatic DRYER . . . dries 6 lbs. in less than 90 minutes; . . . exclusive patented jet action eliminates tumbling, hanging and wear of your clothes.

PORTABLE

fits into any corner or closet, on wheels, only 16" x 16" x 32" high; gleaming white cabinet and utility top; weighs 65 lbs.

EASY LOADING—

through top, no bending down.

AUTOMATIC—

thermostatic timer.

NO INSTALLATION

just plug in, works on any standard 110 volt line.

NO LINT TRAP

to fuss with, no venting necessary.

SIMPLE TO OPERATE

ME-5 Monitor "Jet" drier



HANDSOME TWIN UNITS

MONITOR "55" WASHER with new AERATOR ACTION . . . holds up to 6 lbs. of clothes — capacity 9 gallons of water; washes and damp dries 10 lbs. in 10 minutes; . . . powerful electric wringer-jumbo size roll which damp dries all types of garments—safety foot pedal control which operates electric wringer swings under washer when not in use; . . . single operation—single lever operates washer and electric pump.

EXCLUSIVE MONITOR PULSATOR WASH ACTION sends water whirling through clothes for perfect washing.

NO REVOLVING DRUMS OR TURNING PADDLES to drag, strain or twist your clothes—gives you cleaner, faster, whiter method of washing.

NEW STREAMLINED STYLING has stainless steel washtub; white enamel cabinet; plastic top which provides ideal work surface; mounted on casters for easy roll-away; filler hose that will connect with most faucets; motor power 1/8 H.P., 115 volts, AC only, 60 cycles, UL approved; size 16" x 16" x 32" high; weighs 70 lbs.

ME-1 Monitor "55" washer



Combination Door and Screen-door Hinge

This Heavy Duty, Extra Strong Hinge enables you to use one hinge for both swinging screen door and regular trailer door. 72" long with three 5" Screen Flaps. 3" wide when open. Countersunk embossed holes drilled and staggered every 3".

CMH-12 Wt. 7 lbs.

No wires or batteries needed! Door Chime-Name Plate

Add this cheerful earful to your door . . . to greet friends and family . . . with a warm musical welcome. So inexpensive . . . so easy to install. Has solid brass nameplate on outside of door. Uses no electricity . . . a turn of the handle sounds two chime notes. Fits metal or wood doors 3/8" to 1 3/4" (For installations thicker than 1 3/4" order shaft extension).

- NT-1 Door chime. Wt. 1 1/4 lbs.
- NT-2 Shaft extension. Wt. 2 oz.



Wipe Out Scratches on Furniture and Woodwork with Almond Stick

Tibet Almond Stick wipes out unsightly white scratches with one magic stroke. Stick will efface more than 1,000 scratches.


Z-50 Wt. lb.

Leslie's

THE SOUTH'S FIRST and FINEST

COMFORTS for the MOBILE HOME

by Straussine

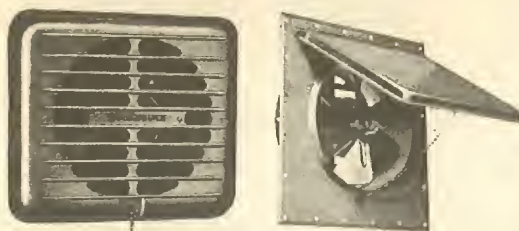

427* Sidewall Ventilator—Newly styled, Improved Model — Better than ever — much greater air capacity.

8" size. Heavy aluminum. Adjustable to wall thickness $1\frac{5}{8}$ " x $2\frac{1}{4}$ ". Simple installation—consists of only 2 parts: the grill, and the motor-color-flange-assembly.

Our No. **SS-130 (427)** Wt. 5 lbs.

- SS-131** Switch only
- SS-132** Motor and fan
- SS-133** Fan blade only
- SS-134** Motor only



127* 8" Powered Ceiling Ventilator —with closing grill—very popular type.



128* 8" Powered Ceiling Attic Ventilator Combination—1 unit does 2 jobs— for moderate attic ventilation.



129* 8" Powered Attic Ventilator —takes air from attic only to relieve condensation.



225 5" Powered Bathroom Ventilator also for Eye Level Oven Ventilation and small areas.

5" Powered Bathroom Ventilator


- Our No. **SS-124 (225)** Wt. 5 lbs.
- SS-125** Cap and roof flange assy.
- SS-126** Motor and fan Wt. 3 lbs.
- SS-127** Ceiling grill Wt. $\frac{1}{2}$ lb.

8" Powered Roof Ventilators


- Our No. **SS-160 (127)** Wt. 10 lbs.
- Our No. **SS-165 (128)** Wt. 10 lbs.
- Our No. **SS-170 (129)** Wt. 10 lbs.
- SS-139** Ceiling grill Wt. 1 lb.
- SS-161** Cap and roof flange assy.




151* Airchief All Weather Roof Ventilator—10" opening—with closing grill — with or without fan.



148 Powered Ceiling Ventilator 14" x 14". Similar to No. 120—forced ventilation when desired.



120 Standard Roof Ventilator 14" x 14". The old stand-by—very effective . . very practical.



170 Skylight Roof Ventilator 14" x 14". Similar to No. 120—has dual glass cover with air space between.

Airchief Roof Ventilators

Storm-proof covers, 6-sector grill for increasing and decreasing ventilation. Strong bronze screening. With and without power, 4" and 7" fans.

- Our No. **SS-107 (151-O)** 10" ventilator without motor or fan Wt. 15 lbs.
- Our No. **SS-108 (151-S)** With 4" fan and motor Wt. 18½ lbs.
- Our No. **SS-109 (151-L)** With 7" fan and motor Wt. 19 lbs.
- SS-123** Small motor and 4" fan only Wt. 3 lbs.
- SS-120** Large motor and 7" fan only Wt. 3½ lbs.

Non-Powered Roof Ventilators

14" x 14" all steel, electric welded. Frames telescoped to fit varying roofs. Patented channel gear raising and lowering mechanism, strong and rapid. Removable screen and inside garnish trim. Available with glass or metal top.

- Our No. **SS-100 (170)** Complete ventilator with glass top Wt. 11 lbs.
- Our No. **SS-101 (120)** Complete ventilator with metal top Wt. 10½ lbs.
- SS-102** Hammered glass for SS-100 Wt. 2½ lbs.
- SS-103** Screen for either Wt. 1¼ lbs.
- SS-104** Channel mechanism for either Wt. 1½ lbs.
- SS-105** Handle for channel mechanism Wt. 2 oz.
- SS-121** Metal top for SS-101 Wt. 4 lbs.
- SS-199** Clear glass for SS-100 Wt. 2½ lbs.
- SS-138** Gasket for hammered glass

Powered Roof Ventilator

- Our No. **SS-106 (148)** Wt. 18½ lbs.
- SS-122** Screen for SS-106 Wt. 1½ lbs.

Leslie's THE SOUTH'S FIRST and FINEST

COMFORTS *for the* MOBILE HOME

by *Strawsine*

27



220

5" Powered Cook Stove Ventilator — Hood type
— vents through roof — latest design.




227*

8" Powered Cook Stove Ventilator — Hood type
— vents through roof — greater capacity.

Our No. **SS-110** (220) 5-inch unit complete
SS-111 Hood assembly Wt. 3 lbs.
SS-112 Power unit Wt. 4 lbs.
SS-113 Clamp-on pipe Wt. 2 lbs.
SS-114 Stack Wt. 4 lbs.

Our No. **SS-150** (227) 8-inch unit complete
SS-151 Hood assembly Wt. 3½ lbs.
SS-152 Power unit Wt. 5 lbs.
SS-153 Clamp-on pipe Wt. 2½ lbs.
SS-154 Stack Wt. 5 lbs.




66

Heat Stack Assembly
Complete — 4" Smoke Pipe.
Better heat protection — Improved Ventilation.



74

Safety Stack Assembly
Complete — 4" Smoke Pipe.
— any heater — New — U.L. Approved.



75

Safety Stack Assembly
Complete — 5" Smoke Pipe.
— any heater — New — U.L. Approved



66DH

Safety Draft Head for 4" Smoke Pipe. Better heat protection.



74DH

Safety Draft Head for 4" Smoke Pipe — any heater —



75DH

Safety Draft Head for 5" Smoke Pipe — any heater —

Don't leak • don't soot up • don't restrict draft.
U.L. Approved — now in general use.



SS-115

Strawsine Heat Stack Cap

A very durable, trouble-free, die-drawn mushroom shaped pipe cap.

SS-115 Wt. 3 lbs.

Our No. **SS-118** (66) Heat stack assy.
Our No. **SS-117** (66DH) Safety draft head
Our No. **SS-210** (74) Safety stack assy.
Our No. **SS-212** (74DH) Safety draft head
Our No. **SS-215** (75) Safety stack assy.
Our No. **SS-217** (75DH) Safety draft head

Wt. 7 lbs.
Wt. 4 lbs.
Wt. 9 lbs.
Wt. 4 lbs.
Wt. 11 lbs.
Wt. 5 lbs.

51-T

2" Plumbing Stack
a roof cop for the bathroom vent pipe.



53-T

3" Plumbing Stack
A roof cop for the larger vent pipe.



53-G

3" Gas Water Heater Stack
Meets requirements for gas vent flue head.



38

3" Gas Space Heater Stack
Ventilated roof assembly for gas flue with ceiling plate.



405

Outside Vent Louvre —
for sidewall — used to relieve condensation.



Our No. **SS-180** (51-T)
Our No. **SS-182** (53-T)
Our No. **SS-184** (53-G)

Wt. 3 lbs.
Wt. 4 lbs.
Wt. 4 lbs.

Our No. **SS-186** (38)

Wt. 4 lbs.

Outside dimensions 2½" high by 5" wide; protrudes ¼".

Our No. **SS-189** (405)

Wt. 3 oz.

Leslie's

THE SOUTH'S FIRST and FINEST

for Cook Stove, Heat Stove, Plumbing

Available with and without Power Units

Mushroom cap top and roof saddle.

Die-stamped and riveted aluminum and galvanized sections. The base flange has 8 holes to assure proper sealing. 415 requires 6-in. roof opening.

Pipe. 15" long. Telescopes into roof saddle and top.**Adapter****Power unit (MXL)** 1½ Watt, permanently sealed and lubricated drives 7" fan. Light socket for 60-watt lamp. Switch control.**Cook Stove Hood.** Stamped aluminum finished in white baked-on enamel. Size: 26¼" x 13½" x 2¼". 7" opening.


415 Unit

415 Unit

- WP-9 Complete with power unit. Wt. 20 lbs.
- WP-1 Unit less power. Wt. 12 lbs.
- WP-2 Cap and saddle. Wt. 4½ lbs.
- WP-3 Pipe, 15-in. Wt. 2 lbs.
- WP-4 Pipe, 19-in. for unit without power). Wt. 2½ lbs.
- WP-5 Adapter. Wt. 2 lbs.
- WP-6 Power unit. Wt. 8 lbs.
- WP-7 Power Unit Less Light. Wt. 7½ lbs.
- WP-8 Hood. Wt. 4 lbs.
- WP-10 (1471) Motor only for WP-6 unit



W-197



CMH-10

M-29



W-7



W-198

W-199

Sidewall Ventilating Louvres

Excellent for ventilating closets, electric refrigerators or to cover dent holes.

CMH-10 10" x 12½" Wt. 1 lb.**M-29** 8" x 10" Wt. 1 lb.**W-197** Round 4" Wt. 5 oz.**W-198** 2" x 4" wide Wt. 5 oz.**W-199** 7/8" x 2" wide Wt. 2 oz.**Wooain, Revolving Stack Top**

Turns at the slightest breeze, the opening always shielded from wind and weather preventing downdraft. Double steel construction, electric welded, galvanized and enameled.

W-7 Wt. 3 lbs.**Tiered Heat Stove Vents.** Includes tiered cap, 8" dia. 10½" above roof. 4" extension pipe, 7½" long. Roof saddle base, 12" dia. designed for flat roof. Ceiling plate, 4" opening, 10" dia.**W-126** Complete unit.

Wt. 6 lbs.

W-127 Tiered cap. Wt. 3 lbs.**W-142** Pipe.**W-128** Base. Wt. 3 lbs.**W-129** Plate. Wt. 1 lb.**Heat Stove Unit** includes Mushroom cap, the overhang type, 7½", 8" above roof. Roof saddle, base-flange with 8" base. Available for flat or curved roofs. And ceiling plate 4" opening, 10" dia.**W-10** Complete unit.

Wt. 5½ lbs.

W-8 Cap. Wt. 2 lbs.**W-5** Saddle (curved roof).

Wt. 3 lbs.

W-6 Saddle (flat roof).

Wt. 3 lbs.

W-9 Plate. Wt. ½ lb.**Cook Stove Unit** includes Mushroom cap, 7½" dia., 5" above roof. Roof saddle, base flange 8". Ceiling plate 4" opening, 10" dia.**W-3** Complete unit.

Wt. 5½ lbs.

W-1 Saddle (curved roof).

Wt. 3 lbs.

W-2 Saddle (flat roof).

Wt. 3 lbs.

W-4 Plate. Wt. ½ lb.**W-8** Cap. Wt. 2 lbs.**Plumbing Vent Stack** including single section roof saddle and cap, 6" dia., 4½" above roof, and plate with 4" opening.**W-119** Vent Stack. Wt. 2 lbs.**W-120** Plate. Wt. ½ lb.

W-126

W-10

W-3



heat stove ventilators

Cook Stove Stack Unit

W-119

Plumbing Vent Stack


Tiered Heat Stove Vents.

Leslie's

THE SOUTH'S FIRST and FINEST

WOODLIN

MARINE WINDOWS

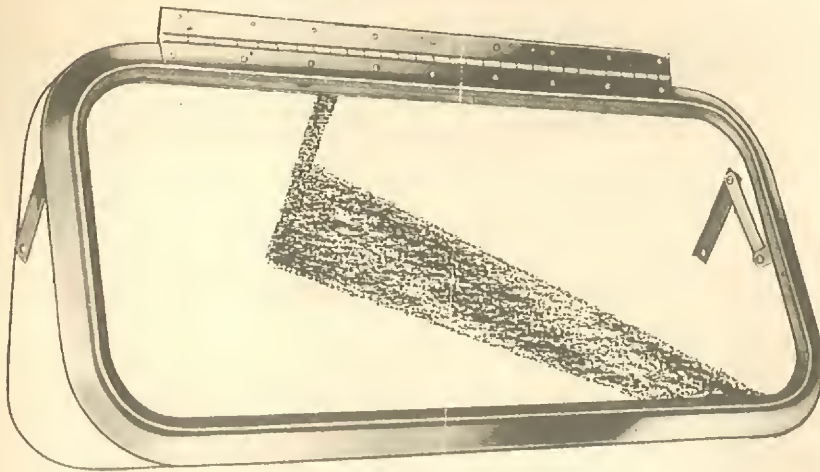**"M" Series**

M-800



OUTSIDE VIEW

"M" Series Hinged Windows

| Our Stock Number | Woodlin Number | Opening Size Req. for Inst. |
|------------------|----------------|-----------------------------|
| WM-10 | M 1013 | 9 1/2" x 13 1/8" |
| WM-11 | M 1017 | 9 1/2" x 16 5/8" |
| WM-12 | M 1023 | 9 1/2" x 23 1/8" |
| WM-13 | M 1031 | 9 1/2" x 31 1/8" |
| WM-14 | M 1717 | 16 5/8" x 17 1/8" |
| WM-15 | M 1723 | 16 5/8" x 23 1/8" |
| WM-16 | M 1731 | 16 5/8" x 31 1/8" |

M-5010

**"M" Series Hinged Windows**

offer a new high in nautical styling, ease of installation plus more years of maintenance-free boating pleasure with perfect visibility and ventilation all the way; sturdy piano type hinge and double cam locking arms which hold window at desired open position or lock when window is closed. Frames are of rust and corrosion-resistant extruded aluminum and weather-tight sealing keeps water out when window is closed; less screen and outer frame.

**Portlight Hinged Window
Model M-5010**

features the positive piano type hinge and double cam locking arms which hold window open at desired level and/or locks securely when window is closed; aluminum glass frame; has permanent screen and weather-tight sealing; opening size required 5" x 10", glass size 4 1/4" x 9 1/4". Wt. 1 1/2 lbs.





WM-5 Model M-5010 portlight window

**Porthole Stationary Window
Model M-800**

in corrosion-resistant aluminum; requires 8" diameter opening, 1" minimum wall thickness; ideal for small boats or as door units for larger cruisers. Wt. 1 lb.

WM-1 Model M-800 with clear glass

WM-2 Model M-800 with frosted glass

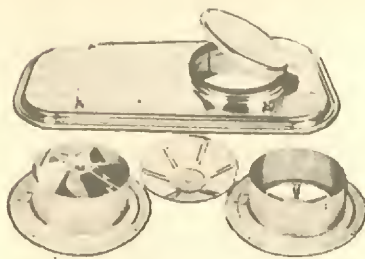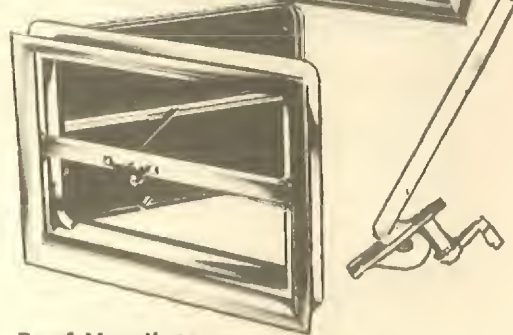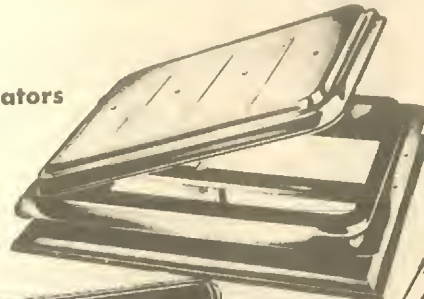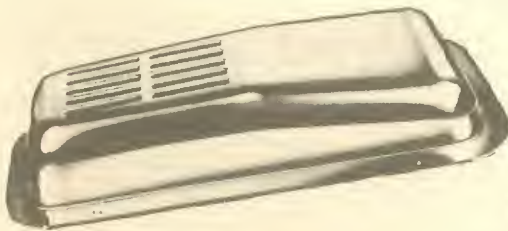Roof Ventilators**Powered Roof Ventilator**


Streamlined aluminum, 23 x 11 x 4". Louvre openings at top are offset to prevent water leakage. Quiet, efficient motor, permanently sealed and lubricated. 5-blade 7" fan. Removable copper screen. Roof opening size 12" x 16".

- N-130 Complete Wt. 15 lbs.
 N-131 Roof vent less motor and fan
 N-133 Cover only
 N-134 Roof plate only
 N-135 Fan, motor, housing and screen
 N-136 Housing and screen

Roof Ventilators

Natural Draft Ventilator of aluminum and galvaneal sections. Absolutely weather tight when closed. Fine-mesh fibre-glass screen.

- W-42 12" x 16" ventilator complete
 W-137 14" x 14" ventilator complete
 W-139 Operating mechanism for 12" x 16" vent. Wt. 1 1/4 lbs.
 W-14 Operating mechanism w/slide—to repair 12" x 16" vent
 W-140 Operating mechanism for 14" x 14" vent
 W-141 Operating mechanism w/slide—to repair 14" x 14" vent
 W-43 Screen for 12" x 16" vent
 W-138 Screen for 14" x 14" vent

**Sidewall
Power Ventilator**

W-180

**Model 450 Sidewall
Power Ventilator**


Styled to blend with any mobile home exterior; adjustable to varying wall thicknesses; features "Powr-Pak" induction motor with oilless bronze bearings. Handsome interior grill.

W-180 Sidewall ventilator complete Wt. 6 lbs.


Leslie's

THE SOUTH'S FIRST and FINEST

Woodlin HINGED WINDOWS

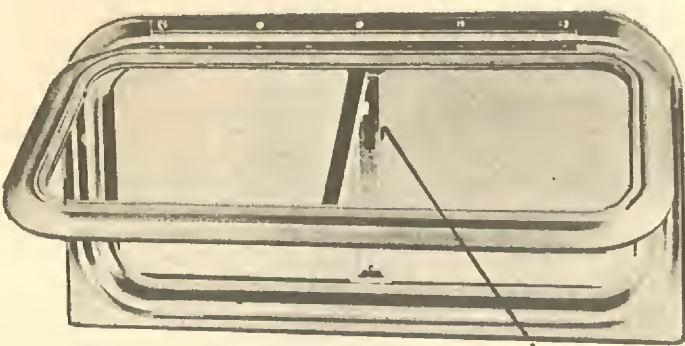

OPENING OR HINGED TYPE WINDOWS

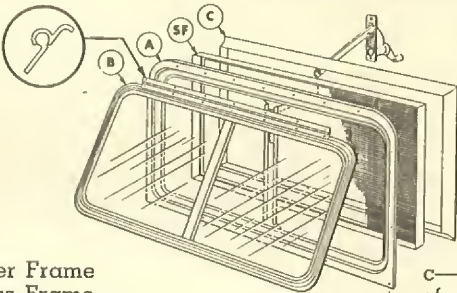

α—Outer Frame
b—Glass Frame
c—Inside Garnish
sf—Screen and Frame
(in circle) end view of extruded hinge.

... in lifetime aluminum
With Crank-Out Mechanism

| No. | Size | Opening Size Req. for Inst. | Outer Frame Overall Size |
|------|-----------|--------------------------------|-----------------------------|
| W-25 | 10" x 13" | 10 1/8" x 13 1/8" | 12 1/2" x 15" |
| W-26 | 10" x 17" | 10 1/8" x 17 1/8" | 12 1/2" x 19" |
| W-27 | 10" x 23" | 10 1/8" x 23 1/8" | 12 1/2" x 25" |
| W-28 | 10" x 31" | 10 1/8" x 31 1/8" | 12 1/2" x 33" |
| W-29 | 17" x 23" | 17 1/8" x 23 1/8" | 19 1/2" x 25" |
| W-30 | 17" x 31" | 17 1/8" x 31 1/8" | 19 1/2" x 33" |
| W-31 | 17" x 43" | 17 1/8" x 43 1/8" | 19 1/2" x 45" |




COMPONENT WINDOW PARTS

| Window Size | (A) Outer Frame w/Channel Att. | (B) Frame | (C) Garnish | (SF) Screen and Screen Frame |
|----------------|-----------------------------------|--------------|----------------|---------------------------------|
| 1013 | WP-141 | WP-151 | WP-161 | WP-171 |
| 1017 | WP-142 | WP-152 | WP-162 | WP-172 |
| 1023 | WP-143 | WP-153 | WP-163 | WP-173 |
| 1031 | WP-144 | WP-154 | WP-164 | WP-174 |
| 1717 | WP-145 | WP-155 | WP-165 | WP-175 |
| 1723 | WP-146 | WP-156 | WP-166 | WP-176 |
| 1731 | WP-147 | WP-157 | WP-167 | WP-177 |
| 1743 | WP-148 | WP-158 | WP-168 | WP-178 |
| Monitor | WP-149 | WP-159 | WP-169 | WP-179 |


CRANK OUT MECHANISM

- W-190 for 17-in. window with channel
- W-191 for 17-in. window less channel
- W-192 for 10-in. window with channel
- W-193 for 10-in. window less channel

Conversion kits for changing windows from "push-out" to crank style are W-190 and W-192.




PUSH OUT MECHANISM



- W-36 (700-D) Window hook
- W-37 (700-F) Outer frame center channel for 17" window
- WP-29 (700-F) Outer frame center channel for 10" window
- W-38 (700-G) Glass frame center channel with adjusting arm attached for 17" window
- WP-30 (700-G) Glass frame center channel with adjusting arm attached for 10" window
- W-39 (700-GA) Adjusting arm only for 17" window
- WP-31 (700-GA) Adjusting arm only for 10" window
- W-40 (700-H) Adjusting arm knob and screw
- W-41 (700-L) Window control lock assembly

WP-28 Sponge rubber gasket 5/16" x 3/8" per foot

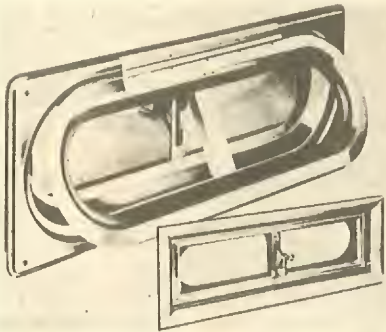

Monitor Type Window


Equipped with new gear-operated opening mechanism, new roll formed garnish with lustrous finish and chrome plated screen frame. Outer overall size 7" x 19". Requires wall opening 5 1/8" x 17 1/8".

- W-44 Wt. 5 lbs. Y-20 Drip cap Wt. 1/2 lb.
- W-194 Operating mechanism only

Woodlin Door Windows

Die-stamped aluminum frames, with glass set in a rubber glass channel. Windows easily installed by wood screws in the outer flange. W-33, W-33F, W-34, W-34F with inside garnish. W-32, W-32F, W-35, W-35F less garnish. Available in round or rectangular shapes. With clear or frosted glass. Wt. 5 lbs.

| Clear Glass | Opening Size Required | Outer Frame Overall Size |
|-------------|--------------------------|-----------------------------|
| W-34 | 16 1/8" diam. (round) | 18" diameter |
| W-33 | 12 1/2" x 18 1/2" | 14" x 20" |
| W-32 | 16 5/8" x 16 5/8" | 18 1/8" x 18 1/8" |
| W-35 | 16 5/8" x 22 5/8" | 18 1/8" x 24 1/8" |
| Frosted | | |
| W-34F | 16 1/8" diameter | 18" diameter |
| W-33F | 12 1/2" x 18 1/2" | 14" x 20" |
| W-32F | 5 1/8" x 16 5/8" | 18 1/8" x 18 1/8" |
| W-35F | 16 5/8" x 22 5/8" | 18 1/8" x 24 1/8" |

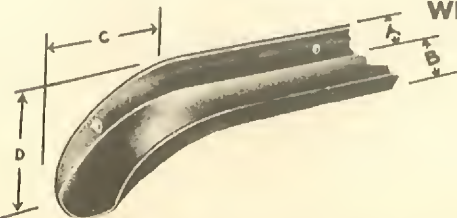

WINDOW VISORS


| | | | | | | |
|------|------|------|------|------|-------|-------|
| Y-16 | Y-34 | Y-46 | Y-66 | Y-84 | Y-102 | Y-127 |
| Y-20 | Y-35 | Y-48 | Y-70 | Y-86 | Y-107 | Y-130 |
| Y-24 | Y-36 | Y-52 | Y-72 | Y-88 | Y-111 | Y-134 |
| Y-26 | Y-38 | Y-54 | Y-74 | Y-90 | Y-112 | Y-138 |
| Y-28 | Y-40 | Y-60 | Y-76 | Y-91 | Y-118 | Y-146 |
| Y-31 | Y-42 | Y-64 | Y-80 | Y-96 | Y-123 | Y-154 |

Leslie's


THE SOUTH'S FIRST and FINEST

WOODLIN'S NEW STANDARDIZED PREMIERE WINDOWS


PICTURE

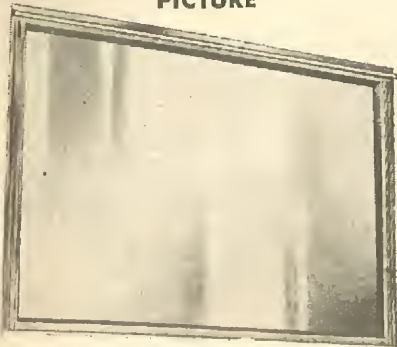

AWNING

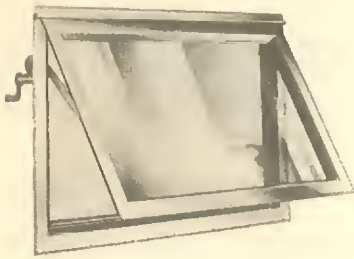


JALOUSIE

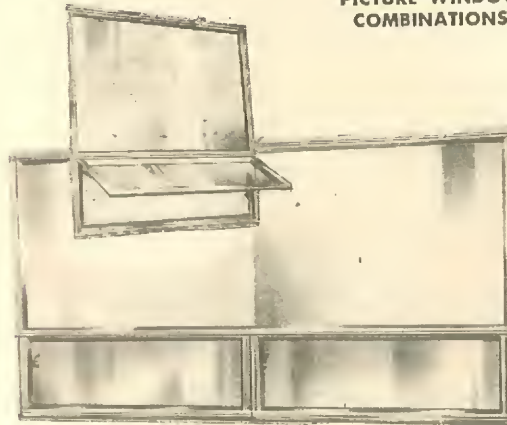AWNING AND
PICTURE WINDOW
COMBINATIONS


Premiere series windows have those clean, simple lines that match the trend toward lighter, brighter, more attractive styling for mobile living; they feature the famous leak-proof, life-long, all extruded aluminum construction, with integral screen frame (on opening windows), smooth operating and locking mechanisms, plus the enhancing beauty and sound engineering that makes for fast, simple installation. All this plus built-in accommodations for a self-contained, matching storm sash that is easily removed for seasonal cleaning—yet never requires storage.

PREMIERE WINDOWS

Available in a wide range of beautiful, functional, awning, casement, tiered, or picture window styles.

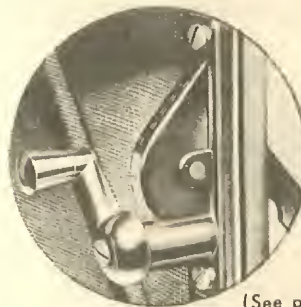

(See page 30 for crank operating mechanisms)

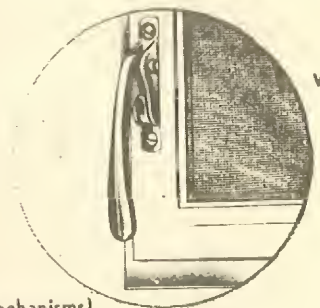

W-16

AWNING AND PICTURE WINDOW COMBINATIONS WITH

| SIZE Height Width | PICTURE WINDOW Series 100 | AWNING WINDOW Series 300 | with | | JALOUSIE WINDOW |
|---|---------------------------------|--------------------------------|--|---|--------------------|
| | | | AWNING WINDOW ON TOP Series 700 | AWNING WINDOW ON BOTTOM Series 800 | |
| 16 $\frac{7}{8}$ " x 16 $\frac{7}{8}$ " | WP-1717 | WA-1717 | — | — | WJ-1717 |
| 16 $\frac{7}{8}$ " x 22 $\frac{7}{8}$ " | WP-1723 | WA-1723 | WAP-1723 | WPA-1723 | WJ-1723 |
| 16 $\frac{7}{8}$ " x 30 $\frac{7}{8}$ " | WP-1731 | WA-1731 | WAP-1731 | WPA-1731 | WJ-1731 |
| 16 $\frac{7}{8}$ " x 42 $\frac{7}{8}$ " | WP-1743 | WA-1743 | WAP-1743 | WPA-1743 | WJ-1743 |
| 22 $\frac{7}{8}$ " x 16 $\frac{7}{8}$ " | WP-2317 | WA-2317 | — | — | WJ-2317 |
| 22 $\frac{7}{8}$ " x 22 $\frac{7}{8}$ " | WP-2323 | — | WAP-2323 | WPA-2323 | WJ-2323 |
| 22 $\frac{7}{8}$ " x 30 $\frac{7}{8}$ " | WP-2331 | — | WAP-2331 | WPA-2331 | WJ-2331 |
| 22 $\frac{7}{8}$ " x 42 $\frac{7}{8}$ " | WP-2343 | — | WAP-2343 | WPA-2343 | WJ-2343 |
| 30 $\frac{7}{8}$ " x 16 $\frac{7}{8}$ " | WP-3117 | WA-3117 | — | — | WJ-3117 |
| 30 $\frac{7}{8}$ " x 22 $\frac{7}{8}$ " | WP-3123 | — | WAP-3123 | WPA-3123 | WJ-3123 |
| 30 $\frac{7}{8}$ " x 30 $\frac{7}{8}$ " | WP-3131 | — | WAP-3131 | WPA-3131 | WJ-3131 |
| 30 $\frac{7}{8}$ " x 42 $\frac{7}{8}$ " | WP-3143 | — | WAP-3143 | WPA-3143 | WJ-3143 |
| 42 $\frac{7}{8}$ " x 16 $\frac{7}{8}$ " | WP-4317 | WA-4317 | — | — | WJ-4317 |
| 42 $\frac{7}{8}$ " x 22 $\frac{7}{8}$ " | WP-4323 | — | WAP-4323 | WPA-4323 | WJ-4323 |
| 42 $\frac{7}{8}$ " x 30 $\frac{7}{8}$ " | WP-4331 | — | WAP-4331 | WPA-4331 | WJ-4331 |
| 42 $\frac{7}{8}$ " x 42 $\frac{7}{8}$ " | WP-4343 | — | WAP-4343 | WPA-4343 | WJ-4343 |

All Woodlin Premiere Series windows, of an opening type such as awning, casement, or tiered windows, feature dual protection of the attractive, crank operated opening and closing mechanism plus the handle-lever type device that insures a positively locked, weather tight

seal. The crank operated mechanism provides accurate, individual ventilation control without effort. Both the crank operator and the locking handle are inset on the inner frame so as to offer no projecting hazard.

W-16 Screen lock

Jalousie Window Operating Mechanism

smooth working, quality-built operating mechanism provides a lifetime of convenient, accurate service. Note that operating mechanism is set well within the window edge so as to eliminate problems with drapes, etc.


WJ-1 Jalousie operating mechanism



#6791 New Woodlin operator. Not interchangeable with #4535.

Leslie's

THE SOUTH'S FIRST and FINEST

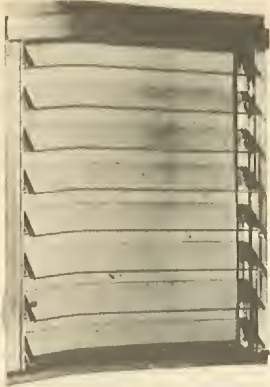

JALOUSIE WINDOW

Built exclusively for mobile homes. Frame does not protrude beyond interior wall paneling. Extra heavy extruded aluminum frames and quiet, positive crank operation.

JALOUSIE WINDOWS

| Height-Width | Glass and Screen | Garnish |
|---------------------|------------------|----------|
| 17-7/8" x 17-7/8" | MJ-1818 | MJG-1818 |
| 17-7/8" x 24-1/4" | MJ-1824 | MJG-1824 |
| 17-7/8" x 31-5/16" | MJ-1831 | MJG-1831 |
| 17-7/8" x 41-7/8" | MJ-1842 | MJG-1842 |
| 20-3/4" x 17-7/8" | MJ-2118 | MJG-2118 |
| 20-3/4" x 24-1/4" | MJ-2124 | MJG-2124 |
| 20-3/4" x 31-5/16" | MJ-2131 | MJG-2131 |
| 20-3/4" x 41-7/8" | MJ-2142 | MJG-2142 |
| 24-1/4" x 17-7/8" | MJ-2418 | MJG-2418 |
| 24-1/4" x 24-1/4" | MJ-2424 | MJG-2424 |
| 24-1/4" x 31-5/16" | MJ-2431 | MJG-2431 |
| 24-1/4" x 41-7/8" | MJ-2442 | MJG-2442 |
| 31-5/16" x 17-7/8" | MJ-3118 | MJG-3118 |
| 31-5/16" x 24-1/4" | MJ-3124 | MJG-3124 |
| 31-5/16" x 31-5/16" | MJ-3131 | MJG-3131 |
| 31-5/16" x 41-7/8" | MJ-3142 | MJG-3142 |
| 41-7/8" x 17-7/8" | MJ-4218 | MJG-4218 |
| 41-7/8" x 24-1/4" | MJ-4224 | MJG-4224 |
| 41-7/8" x 31-5/16" | MJ-4231 | MJG-4231 |
| 41-7/8" x 41-7/8" | MJ-4242 | MJG-4242 |



W-629

(W-629)



(W-690)

JALOUSIE MECHANISMS

M-101 (W-629) New Style
M-102 (W-690) Old Style

Marvel Window Louvers

| Stock No. | Louver Length | Stock No. | Louver Length |
|-----------|---------------|-----------|---------------|
| L-11 | 11" | L-60 | 60" |
| L-19 | 19" | L-65 | 65" |
| L-25-M | 25" | L-70 | 70" |
| L-32 | 32" | L-75 | 75" |
| L-43 | 43" | L-85 | 85" |
| L-45 | 45" | L-90 | 90" |
| L-50 | 50" | L-100 | 100" |
| L-55 | 55" | L-38 | 38" |



PICTURE WINDOW

Completely welded extruded aluminum frames.

PICTURE WINDOWS

| Body Opening | Window | Garnish |
|---------------------|---------|----------|
| 20-3/4" x 17-7/8" | MP-2118 | MPG-2118 |
| 20-3/4" x 24-1/4" | MP-2124 | MPG-2124 |
| 20-3/4" x 31-5/16" | MP-2131 | MPG-2131 |
| 20-3/4" x 41-7/8" | MP-2142 | MPG-2142 |
| 31-5/16" x 17-7/8" | MP-3118 | MPG-3118 |
| 31-5/16" x 24-1/4" | MP-3124 | MPG-3124 |
| 31-5/16" x 31-5/16" | MP-3131 | MPG-3131 |
| 31-5/16" x 41-7/8" | MP-3142 | MPG-3142 |
| 41-7/8" x 41-7/8" | MP-4242 | MPG-4242 |




HINGED WINDOW

May be installed in either horizontal or vertice position. Will open to an angle of approximately 70 degrees.

CRANK OPERATED SINGLE HINGED WINDOWS.

| Body Opening | Window | Garnish |
|---------------------|---------|----------|
| 10-3/16" x 17-7/8" | MH-1018 | MHG-1018 |
| 10-3/16" x 24-1/4" | MH-1024 | MHG-1024 |
| 10-3/16" x 31-5/16" | MH-1031 | MHG-1031 |
| 10-3/16" x 41-7/8" | MH-1042 | MHG-1042 |
| 17-7/8" x 17-7/8" | MH-1818 | MHG-1818 |
| 17-7/8" x 24-1/4" | MH-1824 | MHG-1824 |
| 17-7/8" x 31-5/16" | MH-1832 | MHG-1832 |
| 17-7/8" x 41-7/8" | MH-1842 | MHG-1842 |

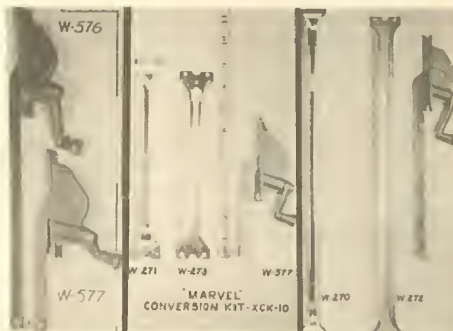

(W-577) (XCK-10) (XCK-18)


M-99 (W-577) 10" crank mech.

M-100 (W-576) 18" crank mech.

Kits to convert lever to Crank Mech.

M-103 (XCK-10) 10" conversion kit

M-104 (XCK-18) 18" conversion kit



Marvel Aluminum Door Windows

The outer frame, complete with glass and rubber seal, with inner-trim garnish. Furnished with clear or Factrolite (opaque) glass. Wt. 10 lbs.

With Factrolite Glass

M-75 Round, 18 1/4" dia.

M-76 Round, 16 1/4" dia.

M-77 18-1/16" x 16-1/16"

With Clear Glass

M-79 Round, 18 1/4" dia.

M-80 Round, 16 1/4" dia.

M-81 18-1/16" x 16-1/16"



VENT WINDOW

Extruded aluminum vent window that harmonizes with all other Marvel windows. Offers maximum ventilation—maximum opening; positive crank operation, waterproof hinge. Takes body opening of 5 1/8" x 17 1/8". Complete with inner garnish.

MV-518 VENT WINDOW




W-639

(W-639)

MV-520 (W-639) Vent operating mechanism

Keene CROSS VENT WINDOW



KEENE CROSS VENTILATION WINDOW
Fits 4 3/8" x 19 3/4" opening.

K-30 Window. Wt. 5 lbs.

K-31 Drip cap. Wt. 1/2 lb.


K-32 Operating mechanism. Wt. 1/2 lb.

NOTE! ORDER GARNISH FRAMES SEPARATELY WHERE NEEDED. THEY ARE NOT A COMPONENT PART OF WINDOW.

Leslie's

THE SOUTH'S FIRST and FINEST

MARVEL

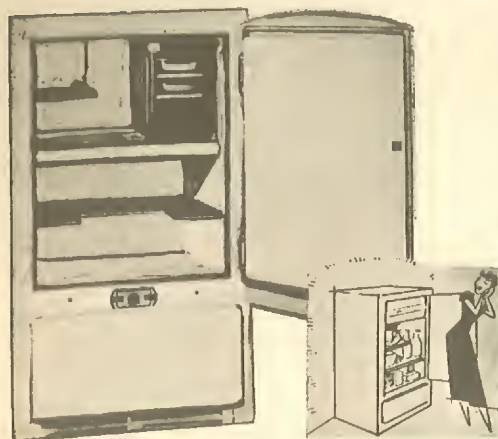

Marvel Electric Refrigerators

Gleaming white porcelain enamel. Tecumseh compressor hermetically sealed for life. Refrigerant Freon 12. Designed for space-saving!

4 cu. ft. Model

Ice-cube trays. Bottle storage room. Dimensions: 40 $\frac{3}{4}$ " high, 23" wide and 22 $\frac{1}{2}$ " deep, over-all.

M-82 Wt. 200 lbs.

5.6 cu. ft. Model

Full-width freezer. Space for tall bottles. Dimensions: 44 $\frac{3}{4}$ " high, 25" wide and 22 $\frac{1}{2}$ " deep, over-all.

M-86 Wt. 250 lbs.

M-83 Rubber gasket for Marvel 4' refrigerator

M-84 Rubber gasket for Marvel 5.6' refrigerator


Quicfrez



Model 102E is 10.2 cu. ft. with 36 lb. full width frozen food chest; 2 ice cube trays; green, white trim color styling; 3 extra shelves in door; full width chil-tray; full width, deep, greens crisper; leveling glides; 55 $\frac{1}{2}$ " high, 28 $\frac{3}{8}$ " wide 28 $\frac{1}{2}$ " deep. Wt. 250 lbs.

Our No. S-4

Quicfrez

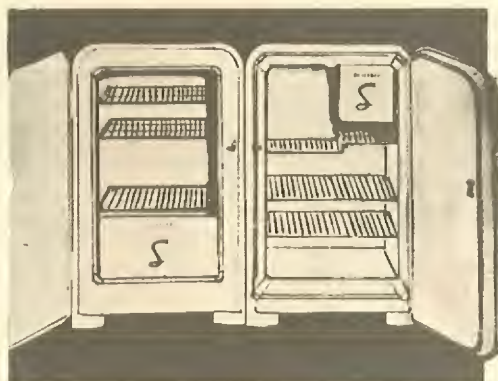

The Quicfrez Twins Model 56A Refrigerator Q42B Freezer

Model 56A Refrigerator

Big, little refrigerator. Quic-chill tray. Party ice-cube trays. Removable shelves to make room for bulk storage. 5.6 cu. ft. capacity. Dimensions: 38 $\frac{1}{2}$ " high, 24" wide and 28" deep, over-all.

S-6 Wt. 180 lbs.

Q42B Freezer

4.2 cu. ft. storage space with 7 sq. ft. shelf area. 1/6 h.p. compressor. Removable shelves for flexible storage. 1-Year Freezer Warranty. 5-Year Condensing Unit Warranty. Dimensions: 38 $\frac{1}{2}$ " high x 24" x 28" deep overall.

S-7 Wt. 210 lbs.

Fully warranted
1 year refrigerator warranty, plus 4 year
warranty on hermetically sealed
refrigeration system

Quicfrez

Model 78A is 8.1 cu. ft. with 32 lb. full width frozen food chest; full width chil-tray; two shelves in door; no fussiness but all essentials and a lot of extras; 51 $\frac{1}{4}$ " high, 24 $\frac{3}{8}$ " wide, 30 $\frac{1}{4}$ " deep. Wt. 205 lbs.

Our No. S-1

Model 81EB is 8.1 cu. ft. with 32 lb. full width frozen food chest; full width chil-tray; three extra shelves in door; removable shelves; full width deep, greens crisper; leveling glides; 51 $\frac{1}{4}$ " high, 24 $\frac{3}{8}$ " wide, 29 $\frac{1}{2}$ " deep. Wt. 205 lbs.

Our No. S-2

Model 81F is 8.1 cu. ft. DELUXE with 32 lb. full width frozen food chest; 3 ice cube trays; green, gold trim color styling; new butter keeper with 1 lb. capacity dish; full width chil-tray; full width, deep, greens crisper; adjustable pull-out shelf; leveling glides; 51 $\frac{1}{4}$ " high, 24 $\frac{3}{8}$ " wide, 29 $\frac{1}{2}$ " deep. Wt. 210 lbs.

Our No. S-3

LITTLE GIANT

33

Genuine Butane refrigerator engineered especially for mobile homes. Five-year guarantee. Compact design, butane or electric. Tropicalized unit effective to 115-degree temperature.



Dimensions:

1 $\frac{1}{2}$ cu. ft.
28 $\frac{3}{4}$ " high,
21 $\frac{1}{4}$ " wide,
21 $\frac{1}{4}$ " deep.

Model G400 - 1 $\frac{1}{2}$ cu. ft.

Built-in construction, but can be used as a free-standing model because of the base built all around, instead of the rubber feet. This also is a fool proof type of installation and permits proper ventilation of air.

BUTANE MODEL

LG-20 (G400) 1 $\frac{1}{2}$ ft. standard, built-in

ELECTRIC MODELS

LG-22 (40E) 1 $\frac{1}{2}$ ft. standard, free-standing

LG-23 (40EB) 1 $\frac{1}{2}$ ft. standard, built-in



Model G-55

Dimensions:

2 cu. ft.
24 $\frac{3}{4}$ " high,
20 $\frac{3}{4}$ " wide,
21 $\frac{1}{4}$ " deep

A slim, sleek refrigerator for the travel trailer. Has a super-charged cooling unit capable of effectively cooling a chassis 50% larger than this model, which ensures unbeatable refrigeration.

BUTANE MODEL


(use for free-standing or built-in construction.)

LG-2 (G55) 2 ft. standard

ELECTRIC MODELS

LG-3 (E55) 2 ft. standard, free-standing

LG-4 (E5-EB) 2 ft. standard, built-in

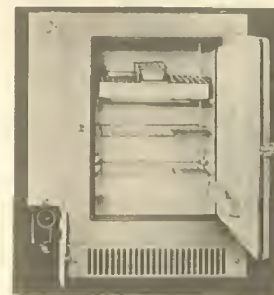

Dimensions:

3 cu. ft.
31 $\frac{1}{2}$ " high,
22 $\frac{1}{2}$ " wide,
26" deep

BUTANE MODELS

LG-30 (75G) 3 ft. tropical, free-standing

LG-31 (75GB1) 3 ft. tropical, built-in



ELECTRIC MODELS

LG-32 (75TA) 3 ft. tropical, free-standing

LG-33 (75EB) 3 ft. tropical, built-in

Leslie's

THE SOUTH'S FIRST and FINEST

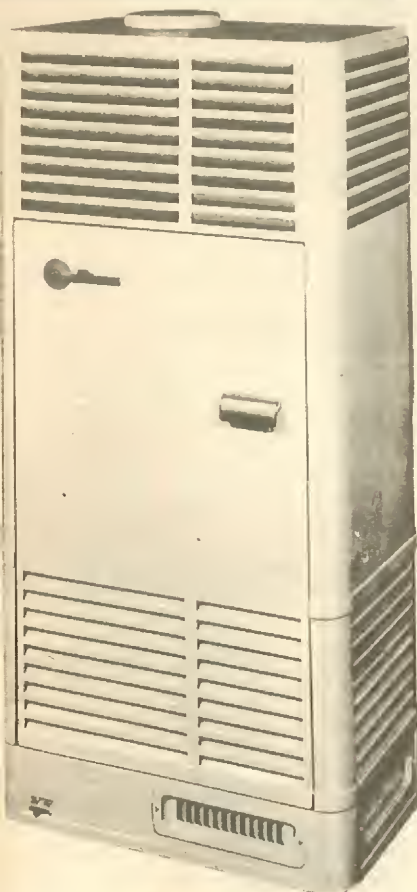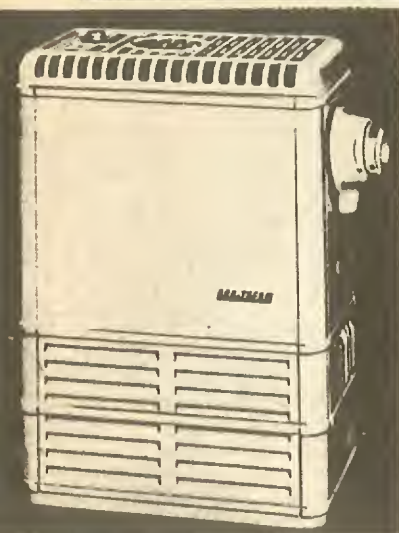**MORE VERSATILE,****MORE POWERFUL, AUTOMATIC!****Low-cost 20,000 BTU****Duo-Therm Heaters (525PA)**

Small or medium mobile home; manual Power-Air blower standard equipment installed at factory; 9 1/2" exclusive dual chamber burner; constant level control; 2 1/4 gal. built-in tank; 4" automatic draft minder included. Beautiful cabinet, shining platinum finish, only 12 x 20 x 30" high.

DT-5 Complete. Wt. 86 lbs.

DT-1 Heater only. Wt. 70 lbs.

DT-2 Blower only. Wt. 20 lbs.

New 27,000 BTU**Duo-Therm Oil Heaters (530)**

Heater with larger blower for medium-large mobile homes; improved 9 1/2" dual chamber burner; constant level control; 2 3/4 gal. built-in tank, 3-way valve; new built-in exclusive automatic Power-Air blower that turns itself on and off; includes 4" automatic draft minder, platinum flue shield; extra adapter and register for back bedroom and fresh-air intake ring. Beautiful cabinet in shining platinum finish, 22" x 14" x 48 1/2" high.

DT-3 Wt. 115 lbs.

Duo-Therm Oil Heaters (540)**With 2-speed Automatic Blower**

Same specifications as 530 with the addition of 2-speed automatic Power-Air blower for increased heat output. 9 1/2" dual chamber burner; constant level control; 2 3/4 gal. built-in tank, 3-way valve; new 2-speed blower with night or day, mild or cold weather setting that turns itself on and off; includes 4" automatic draft minder, platinum flue shield; extra adapter and register for under-floor and fresh-air intake ring. Beautiful cabinet in shining platinum finish, 22" x 14" x 48 1/2" high.

DT-4 Wt. 120 lbs.

Duo-Therm Gas Heater (551)

40,000 BTU input, exclusive crossfire-jet burner; burns a clean, efficient flame from high to low—gets more heat from every gas; improved automatic blower turns itself on and off when thermostat brings on or shuts off heat; includes draft diverter, extra adapter and register for back bedroom and fresh-air intake ring. Beautiful cabinet in shining platinum finish, 22" x 48" high.

Wt. 115 lbs.

DT-7 Manual operation

DT-8 Remote thermostat control

CHANGE-OVER KIT

... from L.P. gas to natural gas; ... OR from natural to L.P. gas. Orifice kit with regulator complete.

DT-80 Kit from L.P. to natural gas

DT-81 Kit from natural to L.P. gas

Draft Regulators

Junior regulators with specific settings on the calibrated dial. 4-in. pipe section. Wt. 2 lbs.

Duo-Therm Automatic Draft-Minder for any heater using 4-in. chimney. Wt. 2 1/2 lbs.

DT-10 Black.

DT-11 Chrome.

**Duo-Therm Down Draft Hoods**

A smoky flame, the odor of burned oil, or high fuel consumption may be caused by a poor flue connection or a down-draft. For down-draft protection. Aluminum hood; for 4" pipe.

DT-12 Wt. 3 lbs.

Motors for Duo-Therm Blowers
Wt. 5 lbs.

DT-20 Motor 105634 for blower 125, heater #525. Platinum.

DT-21 Motor 105610 for blower 106, heater #525. Sun-tan.

DT-22 Motor 105600 for blower 103, heater #525. Sun-tan.

DT-60 Motor 900264 for heater #530 prior to 1954.

DT-61 Motor 105677 for heater #530. '54, '55 model.

DT-62 Motor 105670 for heaters #540, 551.

Other Heater Accessories

DT-23 Manual Switch for motors.

DT-24 Tank pipe.

DT-25 Burner pipe.

DT-26 Pipe dope (8 oz. can)

DT-27 Thermo switch.

DT-14 Adapter.

DT-28 Three-way switch.

DT-29 45° union elbow.

Duo-Therm**Three-way Valve**

For models 530 and 540 for quick switching from outside bulk supply to built-in fuel tank.

DT-13 Wt. 1 lb.



DUO-THERM SERVICE KIT—Every service man needs this inexpensive, all-inclusive Duo-Therm service kit. It contains all the tools necessary to properly install and service mobile home heaters.

Our No. DT-65 Wt. 5 lbs.


Leslie's

THE SOUTH'S FIRST and FINEST


Oil and Gas Heaters for Mobile Homes

Coleman Heaters

35

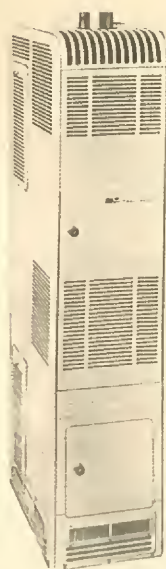

700-701

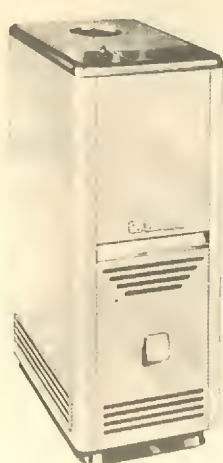


610A, 4001



710

OTHER COLEMAN PARTS

- CO-36 Mount 492-2121 (motor-3 to Pkg.)
- CO-37 Switch 491-2051 (blower-2 pos.)
- CO-38 Switch 700A2391 (blower-3 pos.)
- CO-39 Motor bracket 492-210
- CO-40 Top burner ring 492-3021
- CO-41 Gasket 492-3041 for top burner ring
- CO-42 Low flame ring 492A3221
- CO-44 (700A1481) Thermostwitch
- CO-46 (700-1151) Three-way valve
- CO-47 (700-5121) Baffle flue
- CO-48 (700B4201) Grille
- CO-50 (610-1341) Valve rod knob



SETTE FUEL OIL FILTER

Removes dirt, scale and water from fuel, assures free-flowing, clean burning oil. Reduces fuel and maintenance bills. Provides fitting on tank with shut-off cock and fitting to 3" supply line. Ideal for gravity fuel installations.

SF-1

Wt. 3 lbs.

International Heater Motors (Wt. 8 lbs.)

- E-22 Motor NAC41-37 for NAC41 heater
- E-26 Motor 18M8 for 100, 200, 300 heaters
- E-29 Motor 400-696 for "400" heater

It's-a-Daisy Auxiliary Heater



PR-50
PR-51

Panelray Bottled Gas Heater

Radiates infra-red heat rays which travel at the speed of light and actually penetrate your blood stream before the air is warmed. That's right— instant heat radiated at body height, which warms you from head to toe regardless of air temperature. Fits conveniently into a corner, requiring only a 9" circle of floor space, and is 55 3/4" high. Available in two sizes.

PR-50 Model F-12, 12,000 BTU. Wt. 35 lbs.

PR-51 Model F-18, 18,000 BTU. Wt. 38 lbs.

It's-a-Daisy Auxiliary Heater

Auxiliary heater which can be used with L. P., natural or manufactured gas. Can be attached to floor, shelf, or table. Also used as a cook stove while it heats. One of the handiest items for the trailer. 8 1/2" high x 6" round.

X-4 Wt. 5 lbs.

Barnes Heater Accessories

- BH-2 Outside fuel tank.
Wt. 8 lbs.
- BH-3 Single blower. Wt. 6 lbs.
- BH-4 Double blower. Wt. 8 lbs.



Fuel Oil Filters

Cast-metal and steel construction—no danger of breakage. No cover leaks. Double-filter protection with fine wire screen inside felt element treated to eliminate lint. Generous size 3/8" inlet-outlet openings. Simple installations.

DT-15 General oil filter 1A-25. Wt. 4 lbs.

DT-16 Filter element. 1/2 lb.



- CO-43 (299-8941) 4"
- CO-45 (299-8951) 5"

Leslie's

THE SOUTH'S FIRST and FINEST




MODEL 356 OILIFTER AUTOMATIC FUEL OIL PUMP

The A-P Oilifter lifts fuel oil automatically or up to 25 feet. It feeds and keeps an oil burning appliance supplied at all times... operating only when necessary to maintain a sufficient oil supply for one or more heaters.

Just start the Oilifter at the beginning of the season... no further attention is required. Save steps and time, and eliminate the drudgery of fuel tank filling.

Easily installed with only one 1/4" O.D. copper tube. Wt. 10 1/2 lbs.

- AP-30 Model 356-11 Oilifter less cord and plug
AP-31 Model 356-12 Oilifter with cord and plug

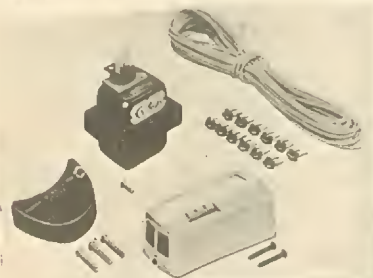

MODEL K252EA THERMOSTATIC CONTROL ACCESSORY KIT

The model 252EA Electric Conversion Kit converts Models 252A, 252A-Y, 252D, or 252L-DB manual trailer control to an automatic unit controlled by a modern electric room thermostat. Complete conversion kit consists of thermostat, Trailer Control Electric Top, a 12-volt transformer, 25 feet of two-conductor thermostat cable, 12 insulated staples and screws. Provides complete control of room temperatures.


Wt. 2 1/2 lbs.

- AP-40 K-252EA conversion kit w/box mtg. transformer
AP-41 K-252EA conversion kit w/plug-in transformer

REPLACEMENT PARTS

- AP-42 Thermostat 88 F-6
AP-43 Box mounting transformer 49364
AP-44 Plug-in type transformer 49364P
AP-45 Electric top 252EA
AP-46 Thermostat cable
AP-47 Thermostat base assy.
AP-48 Thermostat cover w/tube, strap and screws
AP-49 Thermostat mounting screws (2)


MODEL 2400 OIL CONTROL VALVE

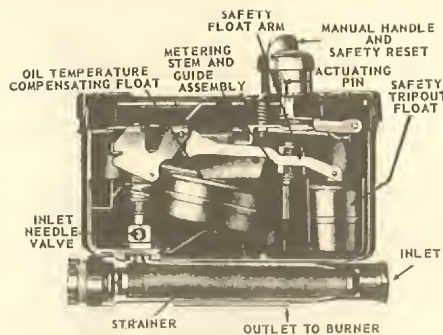

Safely meters the flow of oil from tank or A-P Oilifter to an oil burning space heater, furnace or similar equipment using vaporizing burner; features all steel case and cover for your added protection; a safety trip-out is included to insure positive shut-off of the oil at inlet; delivers a metered flow of oil to a single burner; high fire and low fire rates are stamped on nameplate in cubic centimeters per minute; inlet of control is at the end, and outlet is from the bottom—both connections are tapped 1/4 inch I.P.T. Standard equipment on most 1958 heaters. Cannot be used as replacement for 252D Valve.

AP-70


Wt. 3 1/2 lbs.

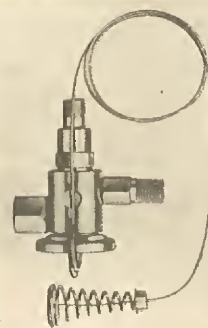

MODEL 119A FLAME PROVER

Dependable safety device will stop flow of oil to your furnace if the flame fails. Rugged construction for long, trouble-free service. Easy to install.

AP-65 Flame prover

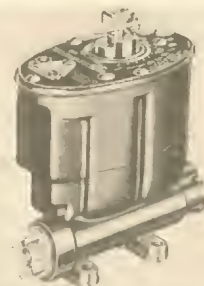

MODEL 252D TRAILER OIL CONTROL VALVE

The 252D Trailer Oil Control Valve is designed to meter and control oil flow on heaters which are not normally in a level position. Can be tipped slightly and will still deliver a continuous supply of oil with safety.


Wt. 2 1/2 lbs.

MODEL 252D OIL CONTROL VALVES

- AP-1 Calibrated 12cc, flow rating 12cc
AP-2 Calibrated 16cc, flow rating 16cc
AP-3 Calibrated 15cc, flow rating 13 to 15cc
AP-4 Calibrated 17cc, flow rating 15 to 17cc
AP-5 Calibrated 18cc, flow rating 18cc
AP-6 Calibrated 21cc, flow rating 19 to 21cc
AP-7 Calibrated 25cc, flow rating 23 to 25cc
AP-8 Calibrated 26cc, flow rating 26cc

REPLACEMENT PARTS FOR 252AY AND 252D OIL CONTROL VALVES

- AP-10 Needle valve gasket
AP-11 Cover gasket
AP-12 Name plate
AP-13 Float and bracket assy.
AP-14 Strainer assy.
AP-15 Strainer gasket
AP-16 Metering stem assy.
AP-17 Metering stem spring
AP-18 Needle valve assy.
AP-19 Needle valve spring
AP-20 Mounting bracket

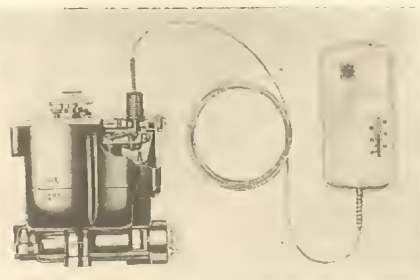

MODEL 22A THERMOMATIC COMFORT CONTROL

Remote thermomatic comfort control with full modulation, non-electric thermostat for use on 252D oil control valve. Changes in the weather have a tendency to change the amount of heat required to maintain your comfort. Model 22A thermostat feels this change and increases the oil flow to the burner when the weather is becoming more severe. On the other hand, the flow of oil is decreased as the weather becomes milder. Force is transmitted by the capillary tube. No electricity is required. Wt. 1 1/2 lbs.

- AP-55 Model 22A Thermomatic comfort control

Leslie's


THE SOUTH'S FIRST and FINEST

SINGLE BURNER
21,000 B.T.U.

WF-1

MULTIPLE BURNER
30,000 B.T.U.

WF-5

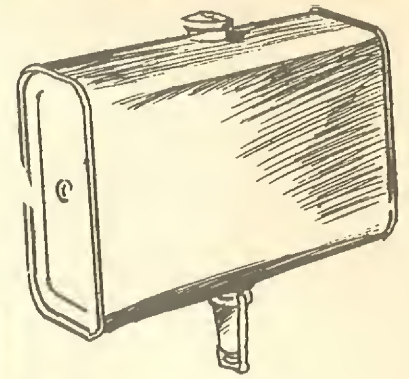

10-gal. Outside Oil Tank

Attractive. Finished in baked-on enamel, and fits snug against outside wall of mobile home. Slips simply on the brackets provided. Fill cap is identical with auto tank cap. Oil line direct to heater inside. With special fuel oil filter.

E-15 Wt. 12 lbs.

For converting oil heater to natural or bottled gas; or to use for auxiliary heating. Designed to fit into your present oil heater to give more heating comfort; gives you a 3-way heater with choice of (1) gas heat alone, or (2) if you run out of gas you can use oil alone, or (3) burn both gas and oil at the same time for extra heat. Each burner complete with all connections and ready for easy installation.

When ordering, be sure to specify: NATURAL GAS or BOTTLED GAS, whichever will be used; also, MODEL AND MAKE OF HEATER.

WF-1 Single burner Wt. 7 lbs.


WF-5 Multiple burner Wt. 9 lbs.

100% Safety Shut-off Pilot — Thermocouple

WF-10

Includes 100% Safety Shut-off, Pilot, Thermocouple and Thermostat "All in One."

UNITROL



WF-15 Thermostat with safety valve and pilot

WF-10 Safety valve with pilot

Draft Regulators

Junior regulators with specific settings on the calibrated dial. 4-in. pipe section. Wt. 2 lbs.

CS-3 Black.

RE-1 Chrome.

Duo-Therm Automatic Draft-Minder for any heater using 4-in. chimney. Wt. 2 1/2 lbs.

DT-10 Black.

DT-11 Chrome.

4-in. Stove Pipe

CT-1 Standard black pipe, 4"x24" long. 1 lb.

RE-5 Chrome pipe, 4"x24" long. 2 lbs.

Elbow for 4-in. Pipe Adjustable to 90°, Wt. 12 oz.

CT-2 Standard black.

RE-10 Chrome.

Brownie Lighter

For fuel oil burners, clean, quick, safe.

X-1 Wt. 1/2 lb.

Clean-Right Soot Remover

A 1/8" layer of soot raises your fuel costs as much as 25%! Clean-Right does a complete cleaning job. No special equipment needed. Safe

DT-17 3-oz. can.

DT-18 8-oz. can.

For 55-gal. Oil Drum

Fil-Thru Gauge—Vent—Fill Pipe

The perfect answer for installing a gauge in a drum with only one opening. Installed in the one-opening, need not be removed when filling tank. Accurate, rugged, rainproof, corrosion proof, and inexpensive. Installed without sealing compound.

F-80



Folding Oil Drum Racks

Substantially made. Folds up easily for shipping or storage.

TD-20 Single stand, 42" high Wt. 25 lbs.

TD-21 Single stand, 54" high Wt. 27 lbs.

TD-22 Single stand, 72" high Wt. 35 lbs.

TD-25 Double stand, 54" high Wt. 45 lbs.

TD-26 Double stand, 72" high Wt. 50 lbs.

TD-30 Adjustable extension legs (set of 4) Wt. 9 lbs.




DT-17
DT-18



X-1

Leslie's

THE SOUTH'S FIRST and FINEST

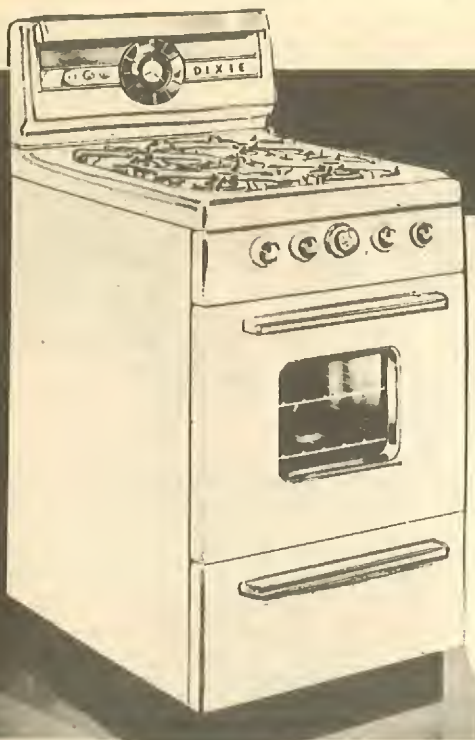

Dixie "Spacemasters" the biggest little ranges in any kitchenette! 2 standard, and 2 giant burners, black porcelain burner grates. Oven 16 x 18 x 13 fully insulated, with accurate oven heat control. Drop-front broiler, with 2-pc. adjustable broiler pan. Curved front design. Gleaming white life-time porcelain. Wt. 176 lbs.


D-1 Deluxe model has new chrome trimmed backguard with top-surface light, appliance outlet, Telechron clock, and 1-hour timer. Light in oven. Oven door window. White drip pan, and aluminum burner caps.

D-3 Standard model

Dixie



Ranges




Dixiemaster "Thirti"

The new 30" stove with the fabulous large width-of-the-range oven. Hi-style backguard with chrome and gold trim, fluorescent light, appliance outlet, electric clock and 1-hour interval timer with gold bezel. Divided top surface has 2 standard and 2 giant lifetime burners with aluminum burner caps, gray porcelain grates and white porcelain drip trays. Doors have new type handles. Drop front broiler with 2-pc. adjustable pan. Light in oven, and oven-door-window.

D-15 Wt. 210 lbs.

DIXIE STOVE REPLACEMENT PARTS

- D-4** Top burner double grate
- D-5** Single grate
- D-6** Drip tray
- D-7** Heat control complete
- D-8** Oven door spring
- D-9** Valve handle

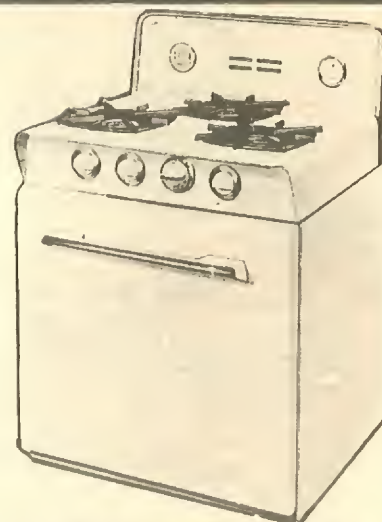

"Princess" Complete Range for Cabinet or Leg Mounting

Only 23-in. high, but with all the practical features of a full-size unit. Three standard "lifetime" surface burners. Generous oven (16 1/2 x 14 x 10 1/2). High-speed smokeless broiler. White Titanium acid-resistant porcelain exterior, full porcelain interior, with full chrome top. Pastel yellow or green backguard panel and manifold cover.

D-10 Standard model

D-11 Deluxe model with Robertshaw oven heat control.

Preway GAS RANGES



Gleaming Titanium porcelain enamel acid-resistant front and working surfaces. One-piece welded and sealed porcelain lined oven. Cast-iron life-time burners. Smokeless one-piece broiler, with 4 glide tracks. Robertshaw oven heat control. Size: 45 3/8 high, x 20 1/2 wide, x 25" Wt. 155 lbs.

P-211 Standard model

P-212 Deluxe model with glass oven-door, backguard and oven lights and timer.

Trailer Rangette

With large 3-burner cooking space. Oven size 16 x 14 1/2 x 11. Well insulated, with Robertshaw heat control, regulates heat from 250 to 550 degrees. Hinged cast-iron cooking grates. 2 oven racks. Removable porcelain drip tray. Operates on propane or butane gas at 6 oz. pressure. Ivory baked enamel with hinged burner cover to match. Size: 20-5/16" high x 23 1/2" wide.

P-209 Wt. 101 lbs.



Caloric Gas Hot Plates 2-burner and 3-burner

White porcelain enamel front, balance baked black japan, rust and heat resistant. All corners rounded. Drip pan removable for easy cleaning. Fast. efficient burners.

CC-100 Two-burner, 20" wide x 12 1/2" deep, 7" high. Wt. 19 lbs.

CC-102 Three-burner, 30" wide x 12 1/2" deep, 7" high. Wt. 27 lbs.


Aluminum Griddle

Fits any stove or hot plate. Ideal for quick frying or pan broiling. 17 1/2" x 11 1/2" with basting trough on side. Scientifically designed to eliminate hot-cold spots.

CC-101 Wt. 5 lbs.

Leslie's **THE SOUTH'S FIRST and FINEST**

Brass Fittings for Gas and Water Connections

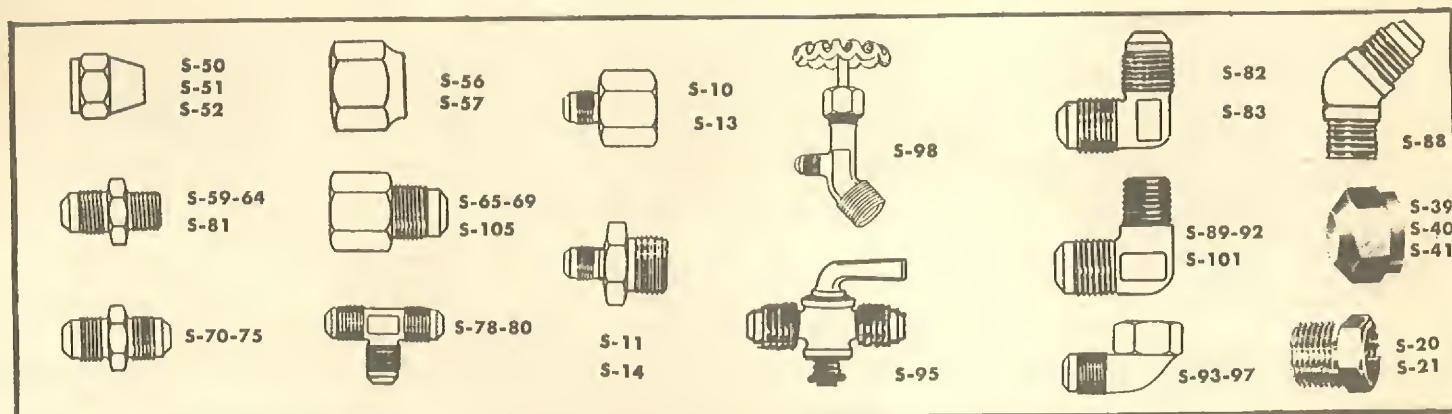

Flared Tube Nut

- S-50 $\frac{1}{4}$ " Wt. 1 1/2 oz.
 S-51 $\frac{3}{8}$ " Wt. 3 oz.
 S-52 $\frac{1}{2}$ " Wt. 3 oz.

Reducing Flared Nut

- S-56 $\frac{3}{8}$ " x $\frac{1}{4}$ " Wt. 3 oz.
 S-57 $\frac{1}{2}$ " x $\frac{3}{8}$ " Wt. 4 oz.

Union—Flared Tube—Male Connector

- S-59 $\frac{1}{2}$ " o.d. x $\frac{3}{8}$ " m.p.t. Wt. 8 oz.
 S-60 $\frac{1}{4}$ " o.d. x $\frac{1}{4}$ " m.p.t. Wt. 6 oz.
 S-61 $\frac{3}{8}$ " o.d. x $\frac{1}{4}$ " m.p.t. Wt. 7 oz.
 S-62 $\frac{3}{8}$ " o.d. x $\frac{3}{8}$ " m.p.t. Wt. 7 oz.
 S-63 $\frac{3}{8}$ " o.d. x $\frac{1}{2}$ " m.p.t. Wt. 8 oz.
 S-64 $\frac{1}{2}$ " o.d. x $\frac{1}{2}$ " m.p.t. Wt. 9 oz.
 S-81 $\frac{1}{4}$ " o.d. x $\frac{3}{8}$ " m.p.t. Wt. 7 oz.
 S-135 $\frac{1}{4}$ " o.d. x $\frac{1}{8}$ " m.p.t. Wt. 6 oz.
 S-136 $\frac{3}{8}$ " o.d. x $\frac{1}{8}$ " m.p.t. Wt. 8 oz.

Union—Flared Tube—Female Connector

- S-65 $\frac{1}{4}$ " o.d. x $\frac{3}{8}$ " f.p.t. Wt. 7 oz.
 S-66 $\frac{3}{8}$ " o.d. x $\frac{3}{8}$ " f.p.t. Wt. 7 oz.
 S-67 $\frac{3}{8}$ " o.d. x $\frac{1}{2}$ " f.p.t. Wt. 8 oz.
 S-68 $\frac{3}{8}$ " o.d. x $\frac{3}{4}$ " f.p.t. Wt. 9 oz.
 S-69 $\frac{1}{2}$ " o.d. x $\frac{1}{2}$ " f.p.t. Wt. 9 oz.
 S-105 $\frac{1}{2}$ " o.d. x $\frac{3}{8}$ " f.p.t. Wt. 8 oz.

Union—Flared Both Ends

- S-70 $\frac{1}{4}$ " o.d. x $\frac{1}{4}$ " o.d. Wt. 6 oz.
 S-71 $\frac{3}{8}$ " o.d. x $\frac{3}{8}$ " o.d. Wt. 7 oz.
 S-72 $\frac{3}{8}$ " o.d. x $\frac{1}{2}$ " o.d. Wt. 8 oz.
 S-73 $\frac{1}{2}$ " o.d. x $\frac{1}{2}$ " o.d. Wt. 9 oz.
 S-74 $\frac{3}{8}$ " o.d. x $\frac{1}{4}$ " o.d. Wt. 8 oz.
 S-75 $\frac{3}{8}$ " o.d. x $\frac{3}{4}$ " o.d. Wt. 9 oz.

Tees—Flared All Ways

- S-78 $\frac{1}{4}$ " Wt. 7 oz.
 S-79 $\frac{3}{8}$ " Wt. 8 oz.
 S-80 $\frac{1}{2}$ " Wt. 9 oz.

45° Elbow—Male Connector

- S-88 $\frac{3}{8}$ " o.d. x $\frac{1}{4}$ " m.p.t. Wt. 7 oz.

Cut-Off Valve

- S-95 $\frac{3}{8}$ " OD tube Wt. 12 oz.

Oil Tank Valve

Heavy body, needle valve type, ground brass seat oil shut-off cock. $\frac{3}{8}$ " OD tube x $\frac{3}{4}$ ".

- S-98 Wt. 1 1/4 lbs.

Flared Union Elbow—Two Way

- S-82 $\frac{3}{8}$ " are x $\frac{3}{8}$ " flare elbow. Wt. 8 oz.
 S-83 $\frac{1}{2}$ " flare x $\frac{1}{2}$ " flare elbow. Wt. 9 oz.

Flared Tube—Male Elbow


- S-89 $\frac{3}{8}$ " o.d. flare x $\frac{1}{4}$ " m.p.t. Ell. Wt. 7 oz.
 S-90 $\frac{1}{2}$ " o.d. flare x $\frac{1}{4}$ " m.p.t. Ell. Wt. 8 oz.
 S-91 $\frac{1}{2}$ " o.d. flare x $\frac{3}{8}$ " m.p.t. Ell. Wt. 9 oz.
 S-92 $\frac{1}{2}$ " o.d. flare x $\frac{1}{2}$ " m.p.t. Ell. Wt. 9 oz.
 S-101 $\frac{3}{8}$ " o.d. flare x $\frac{3}{8}$ " m.p.t. Ell. Wt. 10 oz.

Flared Tube—Female Elbow

- S-93 $\frac{3}{8}$ " o.d. x $\frac{3}{4}$ " f.p.t. elbow adapter. Wt. 11 oz.
 S-94 $\frac{3}{8}$ " o.d. x $\frac{1}{2}$ " f.p.t. elbow adapter. Wt. 11 oz.
 S-96 $\frac{1}{2}$ " o.d. x $\frac{1}{2}$ " f.p.t. elbow adapter. Wt. 12 oz.
 S-97 $\frac{3}{8}$ " o.d. x $\frac{3}{8}$ " f.p.t. elbow adapter. Wt. 10 oz.

Water Hose Connections Wt. 5 oz. ea.

- S-10 Female connector $\frac{3}{8}$ " OD tube x $\frac{3}{4}$ "
 S-11 Male connector $\frac{3}{8}$ " OD tube x $\frac{3}{4}$ "
 S-13 Female connector $\frac{1}{2}$ " OD tube x $\frac{3}{4}$ "
 S-14 Male connector $\frac{1}{2}$ " OD tube x $\frac{3}{4}$ "



Swivel Hose Connection Wt. 7 oz. ea.

- S-16 Female connector $\frac{3}{8}$ " OD tube x $\frac{3}{4}$ "
 S-18 Female connector $\frac{1}{2}$ " OD tube x $\frac{3}{4}$ "

SPECIAL TEES



THREE WAY TEE

FOUR WAY TEE

- S-30 Three-way tee $\frac{3}{8}$ " o.d. x $\frac{3}{8}$ " f.p.t.
 S-31 Three-way tee $\frac{3}{8}$ " o.d. x $\frac{1}{2}$ " f.p.t.
 S-34 Four-way tee $\frac{3}{8}$ " o.d. x $\frac{3}{8}$ " f.p.t.
 S-35 Four-way tee $\frac{3}{8}$ " o.d. x $\frac{1}{2}$ " f.p.t.



COPPER FLARE SEAL BONNET

- S-111 $\frac{3}{8}$ "
 S-112 $\frac{1}{2}$ "



CAP ORIFICE

- S-130

BUSHING - m.p.t to f.p.t.

- S-20 $\frac{1}{2}$ " x $\frac{3}{8}$ "
 S-21 $\frac{3}{8}$ " x $\frac{1}{4}$ "

Wt. 2 oz.
 Wt. 1 oz.

FLARED CAP NUT

- S-39 $\frac{1}{4}$ " o.d.
 S-40 $\frac{3}{8}$ " o.d.
 S-41 $\frac{1}{2}$ " o.d.

Wt. 1 oz.
 Wt. 1 oz.
 Wt. 1 oz.



(ORDER FLARE NUTS SEPARATELY)

THREE - WAY SHUT OFF VALVE

- S-110 $\frac{3}{8}$ " o.d. Wt. 1 1/2 lb

Order S-51 $\frac{3}{8}$ " flare nuts



P. O. L. with Flare Connection

- S-125 P.O.L. x $\frac{3}{8}$ " flare



TAILPIECE ASSEMBLY
 Tailpiece $\frac{1}{4}$ " I.P.T. with
 Standard P.O.L. Nut

- S-120 Tailpiece assy. Wt. 2 1/2 lbs.
 S-121 Tailpiece only Wt. 1 1/2 lbs.
 S-122 Nut only Wt. 1 1/2 lbs.

REDUCING TEE—FLARED ALL ENDS




- S-76 $\frac{1}{2}$ " x $\frac{1}{2}$ " x $\frac{3}{8}$ "
 S-77 $\frac{3}{8}$ " x $\frac{3}{8}$ " x $\frac{1}{2}$ "

Leslie's

THE SOUTH'S FIRST and FINEST

FISHER

Regulators and Accessories

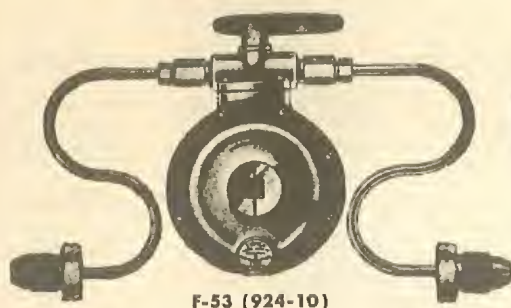


F-53 (924-10)

Heavy-Duty Twin-Tank Regulator Assembly

Designed for use where more gas is required, and reduces the possibility of high pressure leaks in regulator assembly; regulator body and manifold are made of cast zinc, treated to prevent corrosion; assembly includes regulator, throwover manifold, mounting foot screws and two pigtails for connecting to tank valves.

F-53 Wt. 5 lbs.

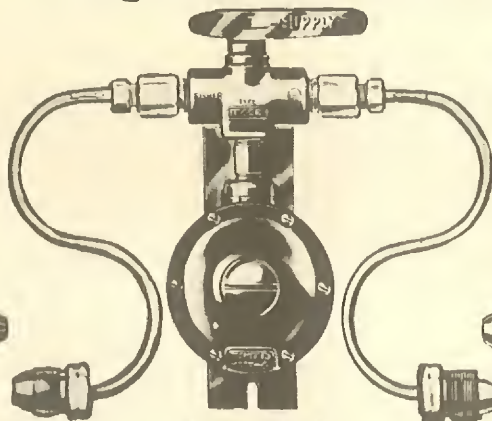

F-62 (Y200-4)


F-54 (1882)

Twin-Tank Assembly with Bracket

Low pressure; designed for ease and simplicity in operating a 2-tank installation; draws gas from only 1 tank at a time, while a tight shutoff is maintained on the other tank without turning the tank valves; when 1 tank is empty a simple turn of the handle so that it points to the full tank is all that is required to change from one to the other; complete assembly including regulator, throwover manifold, mounting bracket and 2 pigtails for connecting to tank valves.

F-62 Regulator assy.

F-54 (1882) Manifold only

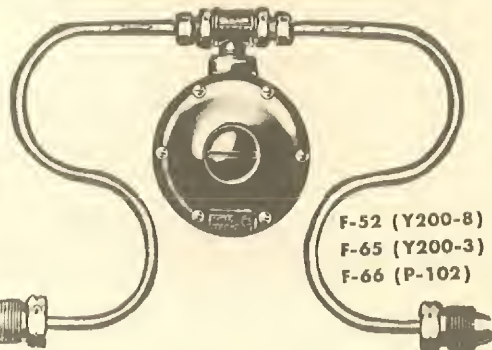

F-52 (Y200-8)
F-65 (Y200-3)
F-66 (P-102)

Twin-Tank Throwover Regulator Assembly


Includes F-50 regulator coupled with check valve cross tee manifold, two 20" pigtails; check valve in manifold provides for disconnecting an empty tank and replacing it with full one without shutting off flow of gas through regulator; the second tank provides gas while the empty is filled.

F-52 Regulator assy.

Wt. 3 lbs.

F-65 Regulator assy. w/mounting bracket

F-66 Mounting bracket only

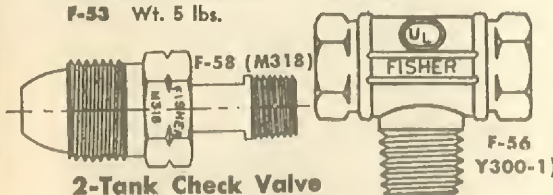

2-Tank Check Valve Cross-Tee Manifold


For converting single-tank regulators to two-tank regulator assemblies; fits any regulator with 1/4" female pipe thread inlet.

F-56 Wt. 2 oz.

POL Spud and Nut

For connecting single-tank regulators to tank valve; regulator connection is 1/4" male pipe thread; valve connection, POL thread.

F-57 Wt. 8 oz.

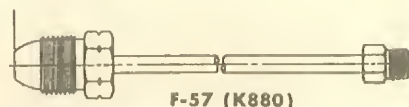

F-57 (K880)


20-in. Copper Pigtail

POL by inverted flare 20" copper pigtail for use with any regulator having 1/4" inverted flare pigtail connections; tank valve connection is POL.

F-57 Wt. 8 oz.

F-50 (Y200-1)

F-51 (Y200-5)

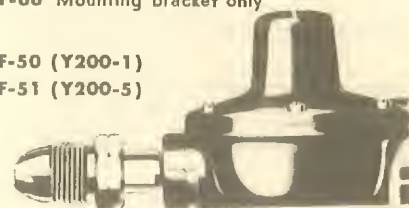


Single Regulator Assembly for Direct Connection

Small size . . . light weight . . . simple to install . . . large capacity; body is of cast zinc, treated to prevent corrosion; neat and compact in appearance but ruggedly built to give better regulation longer. 1/4" pipe thread inlet by 3/8" pipe thread outlet. Complete with inlet adapter.

F-50 Regulator less adapter.

F-51 Regulator with adapter. Wt. 1 1/2 lbs.

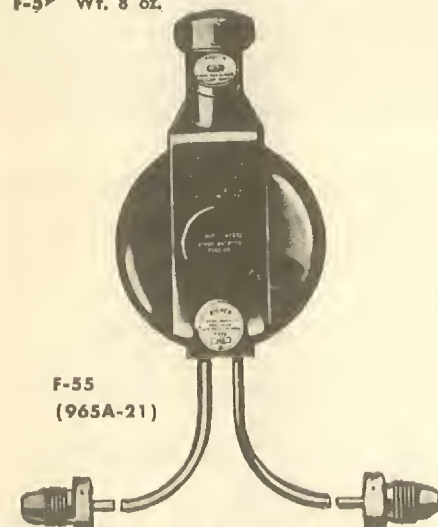

F-55
(965A-21)

Deluxe Regulator Assembly with Automatic Changeover

Designed to operate installations of two or more tanks; when tank connected to one side of regulator is empty, regulator automatically changes to tank connected to other side and starts drawing gas from it without any interruption in supply of gas to appliances, and without any attention from user; when regulator switches from empty tank to full one, a red flag appears to signal user that one tank is empty.

F-55 Wt. 5 1/2 lbs.

REGO® Regulators and Accessories

R-85 (1450R)



R-80 (970U)



R-85 (2302P)
R-86 (5700S)

R-87 (2302P)

R-88 (2302A2)



Regulator Assembly

Straight swivel male POL inlet for direct connection to standard cylinder valve—3/8" NPT outlet.

R-87 With spud & nut.

Wt. 2 1/4 lb.

R-88 Less spud & nut.

Wt. 1 3/4 lb.

P.O.L. Spud and Nut to connect regulator to valve. 1/4" male pipe thread and POL thread.

R-80 Wt. 6 oz.

2-Tank Check Valve Manifold Outfit

Provide relatively low-cost system for two-tank connection which is dependable and safe. Check valve prevents release of gas while empty cylinder is being disconnected and full cylinder installed.

R-85 Manifold valve only.

R-86 Each pigtail only. Wt. 1/2 lb.



R-77 (1421R)

Manual Throwover Valve Manifold

2-tank connection that is economical and safe. Both tank valves may be opened and when the tank in service is empty, level on manifold is easily turned, instantly connecting reserve tank and shutting connection to empty one.

R-77 Wt. 4 oz.

*Leslie's***THE SOUTH'S FIRST and FINEST**

Gas Tanks, Stands and Valves



ICC-Approved Butane-Propane Tanks with POL and 10% Shut-off Valves

High-strength steel, lightweight construction, with convenient handle and valve guard. 5-gallon (20 lb.) capacity. Size: 12" dia., 20" high. Wt. 21 lbs.

- CC-1 With POL and 10% valves.
CC-2 With POL valve only.

BUTANE TANK PACKAGES

- CC-3 consists of 2 No. CC-1 tanks with POL and 10% valve, 1 No. TD-2 tank rack and 1 No. F-52 Fisher regulator.
CC-4 consists of 2 No. CC-1 tanks with POL and 10% valve, 1 No. T-56 tank rack and 1 No. F-52 Fisher regulator.
CC-7 consists of 2 No. CC-2 tanks with POL valve only, 1 No. TD-2 tank rack and 1 No. F-52 Fisher regulator.
CC-8 consists of 2 No. CC-2 tanks with POL valve only, 1 No. T-56 tank rack and 1 No. F-52 Fisher regulator.

Tank Racks

Will accommodate all standard size gas tanks; tension adjusting screws hold both tanks securely in place; easily mounted—no hole drilling; no tools required to remove tank from rack for refilling; adjustable regulator bracket; heavy 14 gauge base with flanged sides for extra stiffness; no welds to break apart; packs flat for easy and low-cost shipping. Fasten base to trailer chassis with "J" bolts. Specify in ordering whether you need 6" (for frames 4 to 6") or 9" (for frames 7 to 9").

- TD-1 Single tank rack.
Wt. 8 lbs.
TD-2 Double tank rack.
Wt. 10 lbs.
TD-3 "J" bolts—6".
Wt. $\frac{3}{4}$ lb.
TD-4 "J" bolts—9".
Wt. $\frac{3}{4}$ lb.

Tank Holders

Made perfectly for the tanks 12" in diameter. Indentation of holder at the bottom prevents tanks from rattling when traveling. No drilling frames. Connected by hook bolts.

- T-55 Single tank holder.
Wt. 8 lbs.
T-56 Double tank holder.
Wt. 17 lbs.

POL and 10% Shut-off Valves

- R-81 BB POL valve 3103CO. Wt. 2 lbs.
R-82 10% bleeder valve 3165F. Wt. $\frac{1}{2}$ lb.
R-83BB POL valve with 10% bleeder valve No. 3103C4. Wt. $2\frac{1}{2}$ lbs.

COPPER TUBING



Seamless Soft Copper Tubing

A high quality copper tubing used for gas or water line.


- Wt. per 50 ft. roll approx. 9 lbs.
T-1 Size $\frac{1}{4}$ ", per foot
T-7 Size $\frac{1}{4}$ ", per 50 ft. roll
T-2 Size $\frac{3}{8}$ ", per foot
T-8 Size $\frac{3}{8}$ ", per 60 ft. roll
T-3 Size $\frac{1}{2}$ ", per foot
T-9 Size $\frac{1}{2}$ ", per 50 ft. roll

Gasket & Joint Sealing Compound

Especially suitable for L-P gas installation. Developed for rapid and easy application. Non-hardening and unaffected by vibration and extremes in temperature.

- S-99 4-fluid oz. cans.
Wt. 9 oz.

A Good Tool for Good Mechanics At a Very Low Price



Flaring Tool

Handles seven sizes of tubing from $\frac{3}{16}$ " to $\frac{5}{8}$ " for making safe connections to all copper tubing lines. Sizes normally used on trailer installations.



- S-45 Wt. 3 lbs.



Tubing Cutter

Capacity $\frac{1}{8}$ " to 1" roller block with sharp cutting wheel gives right angle cut without flattening the tubing.

- S-46 Wt. $\frac{3}{4}$ lbs.
S-47 Tubing cutter wheel

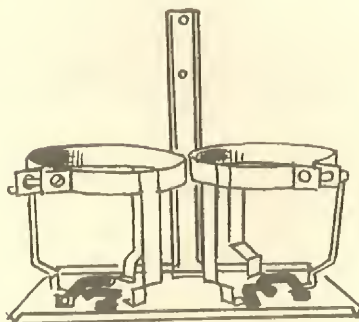

Leslie's

THE SOUTH'S FIRST and FINEST


Traps, Toilet Fittings, Sewer Connectors, Hose

Spring-A-Drain Fittings


are finished in gleaming chrome, will never rust; average wt. 1 1/2 lbs. each.




#2-3M 2" I.D. Hose x 3" Male Pipe
#212-3M 2 1/2" I.D. Hose x 3" Male Pipe
#3-3M 3" I.D. Hose x 3" Male Pipe
SD-1 (2-3M) SD-2 (212-3M) SD-3 (3-3M)



#2-3F 2" I.D. Hose x 3" Female Pipe
#212-3F 2 1/2" I.D. Hose x 3" Female Pipe
#3-3F 3" I.D. Hose x 3" Female Pipe
SD-5 (2-3F) SD-6 (212-3F) SD-7 (3-3F)



#2-3ME 2" I.D. Hose x 3" Male Pipe Elbow
#212-3ME 2 1/2" I.D. Hose x 3" Male Pipe Elbow
#3-3ME 3" I.D. Hose x 3" Male Pipe Elbow
SD-10 (2-3ME) SD-11 (212-3ME) SD-12 (3-3ME)



#2-3FE 2" I.D. Hose x 3" Female Pipe Elbow
#212-3FE 2 1/2" I.D. Hose x 3" Female Pipe Elbow
#3-3FE 3" I.D. Hose x 3" Female Pipe Elbow
SD-15 (2-3FE) SD-16 (212-3FE) SD-17 (3-3FE)

"Aero-Seal" Hose Clamps

For easy, fast installation. Grips hose with just right pressure to make a perfect seal without cutting or crushing hose. Tightens (with notches) the way you do your belt. No loose parts to get lost.

- BC-1 Fits hose 2" to 2 1/2" I.D., outside 2-1/16" to 3". Wt. 5 oz.
BC-2 Fits hose 3" to 3 1/4" I.D., outside 2-13/16" to 3 3/4". Wt. 5 oz.
BC-3 Fits hose 3 1/2" to 4" I.D., outside 3-9/16" to 4 1/2". Wt. 5 oz.



Flexible Galvanized Steel Hose with asbestos packing.

- AT-50 2 1/4" ID 50-ft. roll
AT-51 2 1/4" ID per ft.
AT-55 3 1/4" ID 50 ft. roll
AT-56 3 1/4" ID per ft.



Sani-Flex Drain Hose

- Lightweight — 10' length, weighs 4 lbs.
- Flexible — bends to conform to any angle
- Economical — less cost than heavier hose
- Durable — neoprene liner on inside is tougher and longer lasting than natural rubber

M-325 2 1/2" ID x 10', per length

M-330 3" ID x 10', per length

Couplings for Connecting 2 or More Drain Hose Wt. 1 Lb.

M-236 Hose coupling for 2 1/2" hose

M-331 Hose coupling for 3" hose

HIGH-IMPACT SHATTER-PROOF PLASTIC DRAINAGE CONNECTORS

MALE ADAPTER



M-312
M-314

MALE ELBOW



M-313
M-315

FEMALE ADAPTER



M-316
M-318

FEMALE ELBOW



M-317
M-319

CLOSE COUPLED ELBOW



M-320
M-321

M-310 Elbow sleeve only 2 1/2" x 2 1/2"

M-311 Elbow sleeve only 3" x 3"

M-312 Male adapter 2 1/2" ID x 3" mpt

M-313 Male elbow complete 2 1/2" ID x 3" mpt

M-314 Male adapter 3" ID x 3" mpt

M-315 Male elbow complete 3" ID x 3" mpt

M-316 Female adapter 2 1/2" ID x 3" fpt

M-317 Female elbow complete 2 1/2" ID x 3" fpt

M-318 Female adapter 3" ID x 3" fpt


M-319 Female elbow complete 3" ID x 3" fpt

Note! The complete elbow consists of adapter and elbow sleeve.

CLOSE COUPLED ELBOW (one-piece unit)

M-320 Male elbow 3" ID x 3" mpt

M-321 Female elbow 3" ID x 3" fpt

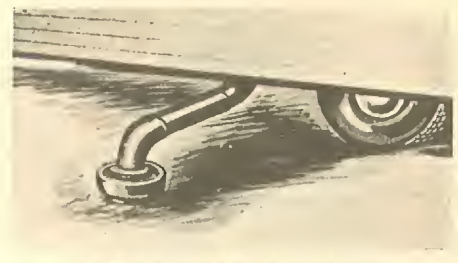

SANITARY DRAIN ACCESSORIES FOR MOBILE HOMES

These are the most satisfactory and easiest connected sanitary drain accessories for mobile homes. Fittings are of special semi-hard rubber, pliable for easy installation, strong enough to form a rigid sanitary connection—foolproof and water tight. No tools, tapes, or caulking necessary to install. Typical installation shown above.




TD-33 Plastic elbow to connect 3" standard pipe to 3" plastic pipe.




TD-43 Plastic elbow to connect 4" standard pipe to 3" plastic pipe.



TD-34 Plastic bushing, 3" inside diameter, to fit 4" tile.



TD-31 All-weather 3" plastic pipe, 16' length.



TD-36 Coupling to connect two pieces of 3" plastic pipe.

Flex-Drain Rubber Sewer Hose



All rubber, wire reinforced; unaffected by sewerage and waste; light weight; non-collapsing. Available in 3" x 10' length only. Wt. 8 lbs.

MTS-1 Rubber sewer hose, per length

Leslie's

THE SOUTH'S FIRST and FINEST

MANSFIELD TOILET




Wt. 100 lbs.

Here is a washdown combination with Space-Saving Tank. White vitreous china with a straight front bowl. The bowl has an extended horn for easy setting and leak-proof connection. The foot of the unit is perfectly level and the four-bolt holes provide a more secure mounting to the floor. There is a greater water surface than found in comparable bowls; the slab set at a steeper angle; and an improved waterway gives more rapid and dependable action. And the tank covers will not rock. Here is a combination that is bound to satisfy.

- MB-1 Toilet complete with seat
- MB-2 Tank
- MB-3 Bowl
- MB-4 Seat


ROUGH-IN DIMENSIONS

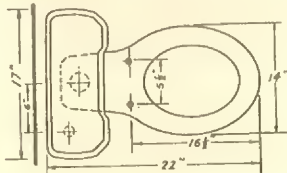

Other Toilet Accessories

- MB-10 Sponge rubber floor gasket
- MB-11 Male flange 3"
- MB-12 Female flange 3"


3-Way Trap



3-Way Trap

Not only traps the "Trailette" Toilet, but further provides two branch inlets for drainage connection of shower, sink or other fixtures. All waste passes through this one trap and discharges directly into your sewer line.

- WC-61 3-Way Trap. Wt. 6 lbs.
- WC-97 Set gaskets, Flanges and cap screw for Trailette trap.

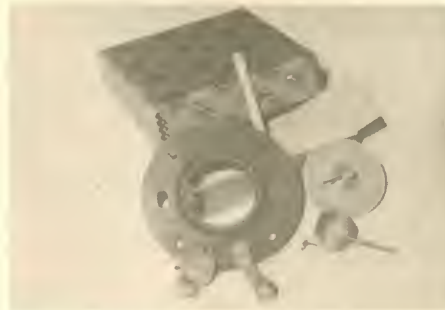


"HANDI-MAN" REPAIR KIT

For Trailettes and Toilets of Similar Design

This kit has replacements for parts in the Trailette most subject to normal wear. With it, you can recondition your Trailette base unit and at the same time convert the clapper assembly to the latest up-to-date type.

The kit contains step-by-step instructions for installing parts, and information on how to install the Trailette in detail.

WC-99 "HANDI-MAN" REPAIR KIT

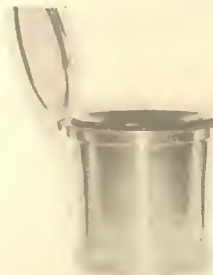

S-25

Chemical Toilet of Spun Aluminum

A double receptacle consisting of the "outside" bowl, or container, and a snug fitting "inner" bucket. Has a Bakelite Seat which is easily removed. 15" diameter at the lid by 16" high.

S-25 Wt. 14 lbs.

Natriphene Toilet Chemical

Carton contains 10 boxes of four tablets each. Four tablets is the proper charge for the standard chemical toilet can of less than five gallons capacity. Fewer tablets may be used in cold weather and more if desired in hot weather. Also used as a household disinfectant, antiseptic and deodorant. Stops many odors but leaves none.

N-50 Wt. 3/4 lb.

THE W-C "TRAILETTE"

Carefully redesigned and constructed to meet the special requirements of trailer coach living and plumbing; special treatment of all metal parts to avoid rusting or staining from condensation; bowl is white vitreous china; new bowl overflow outlet has a molded water trap that prevents leakage of sewer gas; seat and cover are gleaming white; installation space required 18 1/2" wide by 19" deep.

WC-60 Trailette Toilet. Wt. 38 1/2 lbs.

Designed particularly for Trailer Coaches.



PARTS FOR ALL TYPES OF WC 'TRAILETTES'

- WC-40 Base plug 1 1/2"
- WC-64 White seat and cover. Wt. 8 lbs.
- WC-66 China bowl (specify type No.). Wt. 23 lbs.
- WC-68 Clapper spring. Wt. 1 1/2 oz.
- WC-70 Bowl studs, complete with nuts and washers (set of 4). Wt. 3 1/2 oz.
- WC-71 Base gasket. Wt. 1/4 oz.
- WC-72 Base mounting screws (set of 4). Wt. 2 oz.
- WC-74 Set of spud washers, friction washer and locknut for water supply pipe assembly (specify type number). Wt. 2 1/2 oz.
- WC-75 Vacuum breaker. Wt. 3/4 lb.
- WC-76 Self-closing supply valve. Wt. 1 1/4 lbs.
- WC-77 Base complete (specify figure No. and if for Fig. 1494 specify for 1 1/4" or 1 1/2" pipe). Wt. 12 lbs.
- WC-79 Bolts only for W-70 (set of 4). Wt. 2 1/2 oz.
- WC-80 Foot pedal. Wt. 1 lb.
- WC-81 Link. Wt. 2 1/2 oz.
- WC-82 Lever with set screw (specify type No.). Wt. 4 oz.
- WC-84 Supply pipe complete.
- WC-87 Base plug. Wt. 1/4 oz.
- WC-88 1 1/4" plug for No. 1494 toilet. Wt. 1/4 oz.
- WC-90 Clapper hinge shaft. Wt. 3 oz.
- WC-91 Foot pedal stud. Wt. 2 1/2 oz.
- WC-93 Washer only for W-76 supply valve.
- WC-98 Set of hinges for Trailette seat and cover.

PARTS FOR TYPES 3, 4 AND "

- WC-63 Bowl gasket, rubber. Wt. 1/4 lb.
- WC-67 Clapper assembly. Wt. 1/4 lb.
- WC-69 Seating ring. Wt. 1/4 lb.
- WC-78 Clapper arm with taper pin. Wt. 2 1/2 oz.
- WC-86 Taper pin only. Wt. 1 oz.
- WC-89 Foot pedal assembly, complete. Wt. 1 lb.
- WC-92 Gasket only for W-67 clapper assembly.

PARTS FOR TYPE 6

- WC-73 Bowl gasket, rubber. Wt. 1/4 oz.
- WC-83 Clapper arm with taper pin. Wt. 2 1/2 oz.
- WC-85 Clapper only. Wt. 1/4 lb.
- WC-94 Taper pin only. Wt. 1 oz.

Replacement Parts

for McPherson Toilet

- MC-5 Set of bearings
- MC-6 Healthguard Valve
- MC-7 Diaphragm for Valve
- MC-8 White seat and cover
- MC-9 Handle only for Healthguard Valve

Leslie's

THE SOUTH'S FIRST and FINEST

THE JET JUNIOR

No. 30353.

Vitreous china. High velocity flushing action is obtained by built-in jet. The new, more efficient reverse trap assures quick, positive flushing with a minimum amount of water. Brass fittings throughout. 22" long and 17" wide at the tank. Exclusive jet flushing action . . . reverse trap—minimum water.

Approved anti-siphon protection against water contamination.

Shock-resistant mounting — improved cover lock and other exclusive features make this unit as efficient as it is beautiful.

- CJ-1** (30353) Jet Junior toilet complete
CJ-2 (30331) Jet Junior tank complete
CJ-3 (30372) Jet Junior tank cover
CJ-4 (30329) Jet Junior bowl
CJ-5 (30341) Jet Junior seat assembly




30330
rubber gasket




30502
ring (female)



30501
ring (male)




30346
manifold



JET PARTS LIST

- CJ-8** (30346-4) Jet drain manifold—1 1/4"
CJ-9 (30346-2) Jet drain manifold—1 1/2"
CJ-20 (30330) Jet sponge rubber gasket
CJ-21 (30502) Jet adapter ring (female)
CJ-22 (30501) Jet adapter ring (male)
CJ-24 (30437) Jet bowl to floor mtg. assy.
CJ-25 (30438) Jet china bowl caps
CJ-26 (30439) Jet open cap closet nut
CJ-27 (30440) Jet closet bolt
CJ-28 (30333) Jet white rubber closet washer
CJ-29 (30334) Jet oval steel closet washer
CJ-30 (30332) Jet closed closet nut
CJ-31 (30441) Jet closet screw
CJ-32 (30335) Jet round steel washer
CJ-33 (30340) Jet ball cock assembly
CJ-34 (30442) Jet float
CJ-35 (30443) Jet float rod
CJ-36 (30444) Jet link assembly
CJ-37 (30445) Jet refill tube
CJ-38 (30446) Jet thumb screws
CJ-39 (30447) Jet supply tube
CJ-40 (30448) Jet cone washer
CJ-41 (30449) Jet lock nut
CJ-42 (30450) Jet rubber beveled washer for 3/8" intake tubing
CJ-43 (30451) Jet coupling brass washer for 3/8" intake tubing
CJ-44 (30470) Jet rubber beveled washer for 1/2" intake tubing
CJ-45 (30471) Jet coupling brass washer for 1/2" intake tubing
CJ-46 (30452) Jet coupling nut
CJ-47 (30453) Jet flush handle assembly
CJ-48 (30454) Jet tank cover lock assembly
CJ-49 (30455) Jet flush valve assembly
CJ-50 (30456) Jet swivel wire
CJ-51 (30457) Jet lift wire
CJ-52 (30458) Jet rubber ball
CJ-53 (30459) Jet valve seat
CJ-54 (30460) Jet guide
CJ-55 (30461) Jet guide screw
CJ-56 (30462) Jet overflow tube
CJ-57 (30463) Jet beveled rubber washer
CJ-58 (30464) Jet yoke
CJ-59 (30465) Jet stud bolt
CJ-60 (30466) Jet rubber gasket
CJ-61 (30467) Jet rubber washer
CJ-62 (30468) Jet metal washer
CJ-63 (30469) Jet stud bolt nut
CJ-64 (30498) Jet hinge assy for seat

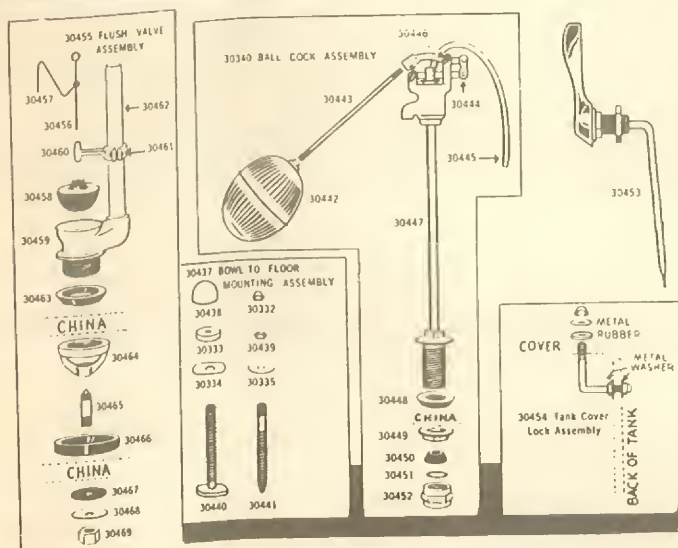

THE JET SENIOR

No. 30622

Vitreous china, special syphon action wash-down bowl, 14" high, with jet and extended rear shelf.

Tank bolted directly to bowl, not attached to wall. Small tank for minimum amount of water. High grade tank fittings, with patented anti-syphon ball cock.

Features large bowl with economy tank.

Exclusive jet flushing action . . . minimum water . . . wash down bowl

Most compact unit made

Finest high-fired vitreous china



"Leader Toilet" Discontinued and Replaced by "Jet Senior Toilet"

There are some replacement parts still available for the "Leader."

Jet Parts Listed Above Are Also Applicable to Jet Senior Toilet


The BOWL and SEAT replacements are not interchangeable.

THE JET SENIOR

No. 30622


- CS-10** Jet Senior toilet complete
CS-11 Jet Senior tank complete
CS-12 Jet Senior tank cover
CS-13 Jet Senior bowl
CS-14 Jet Senior seat assy.

ROUGH-IN DIMENSIONS

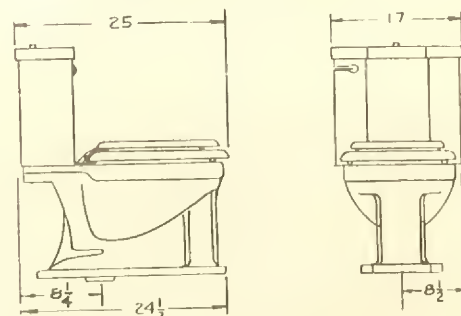


Leslie's

THE SOUTH'S FIRST and FINEST

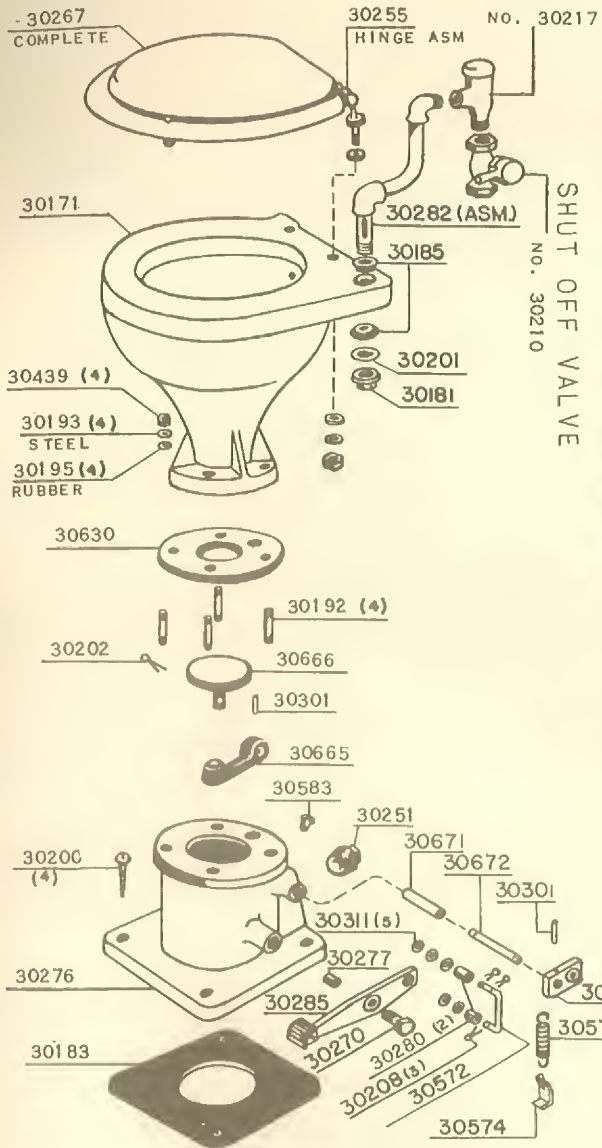

White Vitreous China bowl with built-in overflow. Operates efficiently on both high and low water pressure. Low water usage. Approved Vacuum Breaker is in a one-piece assembly connecting the bowl spud to the self-closing water valve, and is designed to provide proper height above the toilet bowl automatically when it is installed. Base is tapped for 1½" pipe thread to permit consolidated waste line piping. Floor space of only 19" x 17" accommodates the entire unit. Molded plywood seat will not warp or crack.

ROUGH-IN
DIMENSIONS



PARTS AVAILABLE IN KITS

SPRING CONVERSION KIT NO. 30579 includes (1) 30572, (1) 30573, (1) 30574, (3) 30208, (5) 30311.

BOWL STUD KIT NO. 30634 includes (4) 30192, (4) 30193, (4) 30195, (4) 30439.

ASSEMBLIES

LEVER ARM ASM. NO. 30213A includes (1) 30665, (1) 30672, (1) 30202, (1) 30628-A (1) 30301.

30263 BASE ASM. ONLY INCLUDES all parts shown except 30171 china bowl, 30267 seat asm, and 30308 intake pipe asm.

VALVE REPLACEMENT KIT NO. 30667 includes (1) 30666, (1) 30665, (1) 30630, (1) 30301, (1) 30202.

LEVER SHAFT KIT NO. 30677 includes (1) 30672, (1) 30628-A, (1) 30301.

MARINER MASTER REBUILDING KIT NO. 30678 includes (1) 30667, (1) 30677, (1) 30579.

30316 BASE ASM. ONLY INCLUDES all parts shown except 30171 china bowl and 30267 seat asm.

INTAKE PIPE ASM. NO. 30308 includes (1) 30282, (1) 30210, (1) 30217.


30285 FOOT PEDAL ASM. INCLUDES (1) 30278, (1) 30279, (1) 30286, (1) 30287, (1) 30293.

ASM. NO. 30164 INCLUDES ALL PARTS SHOWN.

Order **MARINER TOILET** and **PARTS**, also **KITS** and **ASSEMBLIES** by manufacturer's **NUMBERS**, but be sure to include **DESCRIPTION** of the **ITEM** you are ordering.

JET LAVATORY


- Generous washing area for every need.
- Built-in overflow outlet.
- Anti-splash rim.
- Attractive deep skirt.
- Wide shelf with a receptacle for soap and glass.

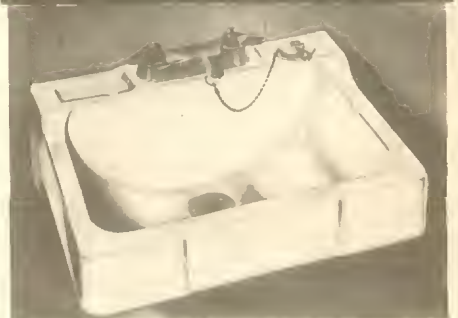

C-9 Jet Senior Lavatory 15" x 18". Wt. 30 lbs.
C-11 Jet Junior Lavatory 12" x 16". Wt. 28 lbs.

BATHTUB TRAP ASSY.

- C-5 1¼"
- C-6 1½"



THE MERMAID BATHTUB



CUNNINGHAM Mermaid Bathtubs

- Drawn 14-gauge steel—no welding; detachable skirt.
 - Exclusive center drain; pitched for positive drainage.
 - Handsome, gleaming white porcelain finish.
- C-1 Mermaid tub 12" high, 27½" wide, 46½" long
C-2 Mermaid tub 12" high, 27½" wide, 54" long

MOBILE HOME Tubs, Showers and Fittings



LAWNDALE

"Beverly" Tub

LAWNDALE

"Beverly" Tub

Completely modern in design, with sleek, clean line, 1-pc. deep-drawn steel stamping punched for right-hand or left-hand drain. Lustrous white acid-resisting enamel. 46 1/2" x 27" x 12" full size interior contours.

L-28 tub Wt. 90 lbs.



Lawndale Trailer-Light Lavatory

Lustrous white acid-resisting enamel over steel. Easy to install, with its own porcelain enamel wall bracket 16" x 13 1/2" x 6", basin: 13 1/4" x 8 3/4" punched for center-set mixing faucet, no overflow. Uses M-212 faucet shown on p. 49, and CR-3 drain.

L-22 Lawndale Lavatory Wt. 18 lbs.

Plastic Lavatories Are Lightweight

Attractive. Of heat-resisting plastic, rustproof, stainless, and chip-proof. In choice of wall, or corner styles. Drain and faucet holes to fit all standard fixtures. (Faucets shown not included in prices.)

Uses M-212 faucet shown on p. 49.



Shower Trap with Side Outlet

With strainer for limited space with a side outlet for 1" pipe. Iron body. 2 3/4" overall height. 4 1/4" dia. Removable strainer plate permits cleanout.

CE-21 Wt. 4 lbs.

Shower Trap with Center Outlet

With strainer for confined space where 1" pipe drain goes directly through floor. Iron body. 2 1/4" overall height. 4 1/4" dia. Removable strainer plate and bell casting permits cleanout.

CE-22 Wt. 3 1/4 lbs.

Medicine Cabinet

Beautiful metal medicine cabinet finished with baked-on white enamel; mirrored door; spacious inside. Size: 11" x 16" x 4"


H-140 Medicine cabinet Wt. 6 lbs.
H-141 Mirror only



Square Shower Base

Baked-on crinkle finish in black. 3 inches deep; top edge grooved to take tile board. Stock sizes shown below, but can be made special to order in other sizes. Wt. approximately 15 lbs.

T-76 Size 28" x 28"
T-77 Size 30" x 30"
T-78 Size 32" x 32"



CR-1 Wall-type. Overall size: 14 1/4" x 12 3/4"
Size of bowl: 12 1/2" x 7 1/4" x 5" deep. Wt. 2 lbs.

CR-2 Corner type. Overall size: 14" x 15 3/4"
Size of bowl: 12" x 9" x 5" deep. Wt. 2 lbs.


CR-3 CO drain. Wt. lb.



CR-1



CR-2

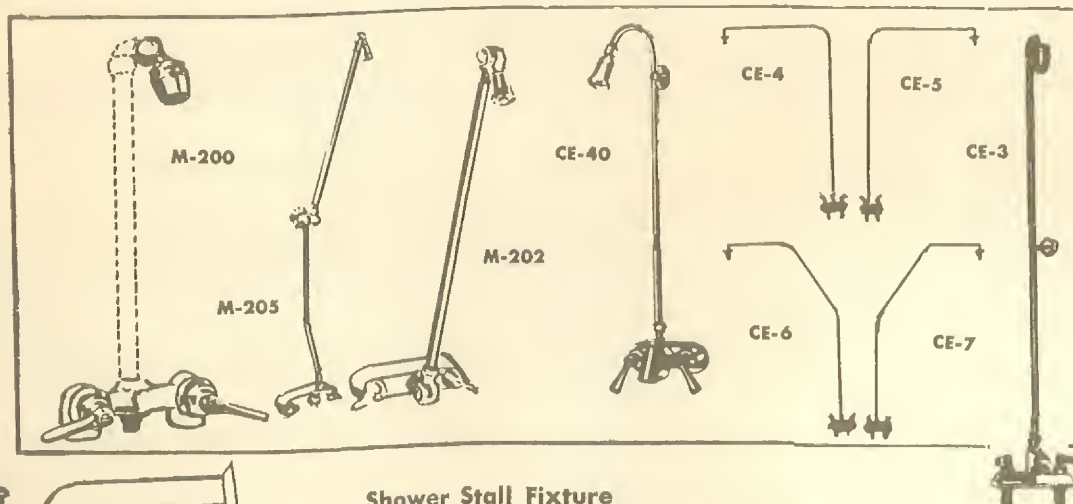

Shower Stall Fixture

Concealed type unit with supply line provision for top or bottom of valves. Supply on 4" center for 1/2" pipe. Shower head with ball joint, 1/2" IPS connection, chrome plated. Wt. 1/2 lb.

Adjusto Shower Fixture and Tub Filler

Adjustable height, shampoo hair, bathe children, to fill tub, take a shower. Connection for supply is standard 1/2" IPS female union on 6" centers. Jewel chrome finish.

M-200 Complete Wt. 5 lbs.
M-201 Shower head only
M-203 Shower head with swivel top attachment only, for M-202.
M-204 Shower head with swivel top attachment only, for M-205.
M-205 With joint. Wt. 10 lbs.

Lav-O-Shower


Combination ledge type lavatory fixture and shower with automatic diverter. Mount on lavatory only. Rigid, ball joint shower head set for 28" shower stall. Specifications: ledge mounting with 4" centers; 1/2" pipe thread on spud; 3/8" o.d. tube slip nut connection provided but can also use 1/2" o.d. tube or 1/2" pipe; 40" overall height; offset shower heads can be furnished 24" to either right or left. Wt. 8 lbs.

CE-3 Upright
CE-4 Square, left hand
CE-5 Square, right hand
CE-6 Angle, left hand
CE-7 Angle, right hand
CE-8 Faucet assembly with diverter

Switch-Flow Shower

A wall-mounting type automatic shower fixture. Flow re-diverts to lavatory when water is turned off. Mounts through wall on 3 3/8" centers—3/4" pipe thread on spuds. 39" riser.

CE-40 Wt. lbs.
CE-41 Faucet assembly with diverter



TUBULAR TRAPS

CE-31 1 1/4" "P"
CE-32 1 1/2" "P"

CE-38 1 1/4" "S" Trap
CE-39 1 1/2" Continuous Waste

EXTENSION TUBES

CE-36 1 1/4"
CE-37 1 1/2"

Leslie's

THE SOUTH'S FIRST and FINEST

Payne Automatic Electric Water Heaters



Models
126-210
212-320



Models
123-136




Models 312-412

| MFGRS. MODEL NO. | GALLON CAPACITY | WATTS | VOLTS | SIZE IN INCHES | WT. | OUR STOCK NO. W/GALVANIZED TANK | OUR STOCK NO. W/GLASS LINED TANK |
|------------------|-----------------|-------|-------|----------------|-----|---------------------------------|----------------------------------|
| 123 | 3½ | 750 | 115 | 12 SQ x 13 H | 30 | P-2 | PGL-2 |
| 126 | 6½ | 1000 | 115 | 12 SQ x 22 H | 41 | P-3 | PGL-3 |
| 136 | 6 | 1000 | 115 | 13 SQ x 14½ H | 39 | P-4 | PGL-4 |
| 210 | 7½ | 1000 | 115 | 13 SQ x 19 H | 50 | P-5 | PGL-5 |
| 212 | 12 | 1000 | 115 | 13 SQ x 27 H | 61 | P-6 | PGL-6 |
| 320 | 20 | 1500 | 115 | 13 SQ x 41 H | 98 | P-7 | PGL-7 |
| 312 | 12 | 1000 | 115 | HORIZONTAL | | | |
| | | | | 13 SQ x 27 L | 61 | P-9 | PGL-9 |
| 412 | FAST | 1000 | 115 | HORIZONTAL | | | |
| | RECOVERY | 2000 | | 13 SQ x 27 L | 61 | P-10 | PGL-10 |

SPEED-O-MATIC


Automatic
Electric Water Heater

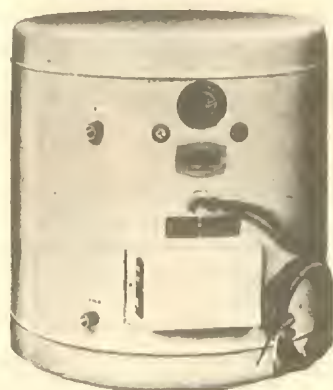

Automatic Electric Water Heaters
Convenient and dependable. Always hot water when you turn the tap. Designed to reduce use of electricity, and lower operating costs. 1,000 watts, 110/120 volts.

| | Gal. | High | Dia. | Wt. Lbs. |
|-------|------|------|------|----------|
| SP-1 | 6 | 16½" | 14½" | 40 |
| SP-2 | 10 | 17½" | 16¾" | 50 |
| SP-3 | 12 | 18¾" | 18¾" | 70 |
| SP-4 | 12 | 27" | 14½" | 60 |
| SP-17 | 17 | 23¾" | 18¾" | 80 |
| SP-20 | 20 | 26" | 18¾" | 90 |
| SP-21 | 20 | 31" | 16¾" | 80 |

DUO-THERM

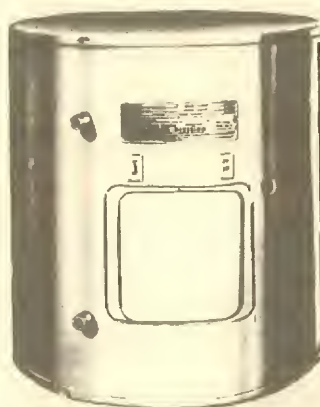

Duo-Therm 12-gallon Automatic Electric Water Heater
Hot-dipped galvanized boiler tank. Fibre-glass blanket of insulation. Band-type heating element for long life. On-off switch and extra convenience outlet. Automatic temperature control. Gleaming white baked enamel finish. Operates on 115 volts, 20¼" tall and 18" dia.

DT-50 Wt. 61 lbs.

WH-111 Water heater bulb

BLUE-FIRED GLASS LINED WATER HEATERS

Unconditionally guaranteed for 5 years against leaking tank. Single break-snap action—simple indexed pointer thermostat; double insulation with asbestos and fiberglass; heavy duty heating element; equipped with magnesium rod; concave bottom with self cleaning heating surface; self draining prevents accidental freezing of tank.

GALVANIZED WATER HEATERS

Double-break snap action pointer thermostat; heavy steel zinc dip galvanized tank; dual cut-out thermostat protects against power failure; nylon stops for protection from electrolysis.

Double Element Water Heater

Fast Recovery Electric Water Heater—320 or MODEL 412
More Gallons a Day

This NEW water heater is two heaters in one. In normal operation only one heating unit is used and the heater performs as a standard automatic electric Payne water heater. When you want lots of hot water you simply flick a handy switch and the second heating element goes to work. For plenty of hot water all the time, just leave both heating elements in operation. This gives you twice as much hot water as a standard model, at no extra cost.

Parts for Electric Water Heaters

When ordering be sure to give model number and size.

Bantam

BT-1 Thermostat
BT-10 10" band element 600W-3 gal.
BT-12 12" band element 1000W-6 gal.
BT-14 14" band element 1000W-12,20 gal.
BT-18 18" band element 1500W-B220,20 gal.
Wts. 1 to 2 lbs.

Bowen

BN-10 Disc element Wt. 3 lbs.
BN-11 Therm-O-Disc thermostat Wt. 1 lb.
BN-15 Glow coil for gas heater Wt. 3 lbs.

Duo-Therm

DT-51 Band element Wt. 1½ lbs.

Modern

MN-10 10" band element Wt. 1½ lbs.
MN-12 12" band element Wt. 1½ lbs.
MN-15 Thermostat Wt. ½ lb.

Payne


P-11 Thermodisc Wt. 1 lb.
P-12 Immersion element 1000W for 023, 026, 036, 112 heaters
P-14 Immersion element 1500W-320 heater
P-16 Disc element for 136, 210, 212, 312, 412
P-17 Disc element for 113, 016, 123, 126
Wts. on elements 3 lbs.
P-19 Camstat thermostat Wt. 1 lb.
P-20 Relief valve (see p. 52) Wt. ½ lb.

Speed-O-Matic

SP-5 Open coil element for heaters made 1954 and later Wt. 3 lbs.
SP-6 Immersion element for heaters made prior to 1954 Wt. 3 lbs.
SP-7 Thermostat Wt. 1 lb.
SP-40 Relief valve (see p. 52) Wt. ½ lb.
SP-41 Water heater switch

Leslie's


THE SOUTH'S FIRST and FINEST

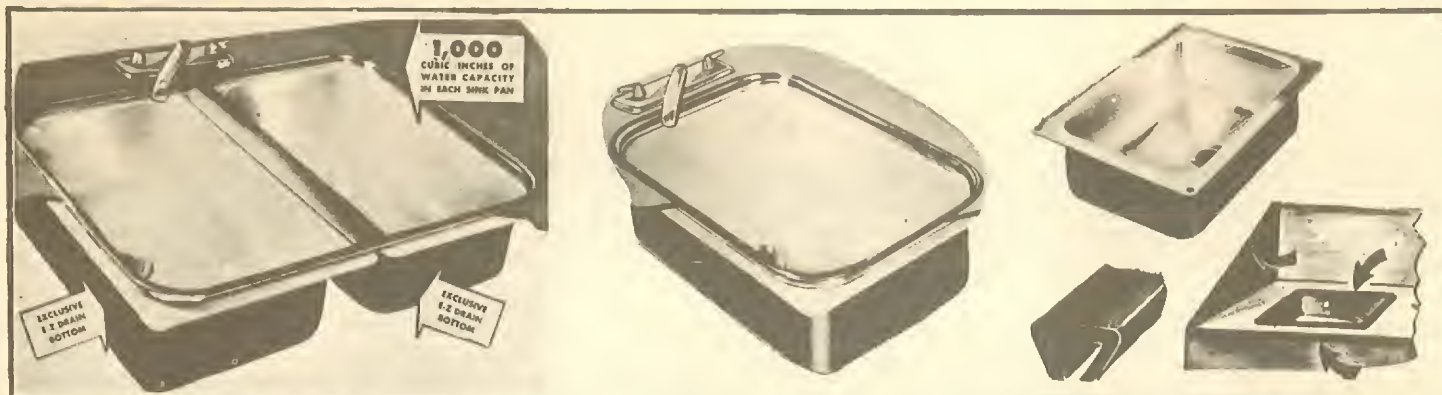

E-Z Drain Sinks— Single and Double

Single sink weighs 5 lbs.
Single moulding weighs 1 lb.

- B-21 Single sink 12½" x 18" x 6" deep with 2" drain opening, less moulding
- B-75 Single sink with moulding
- B-76 Single moulding only
- B-77 Two sinks complete with moulding
- B-78 Moulding complete for two sinks
- B-79 Center moulding only

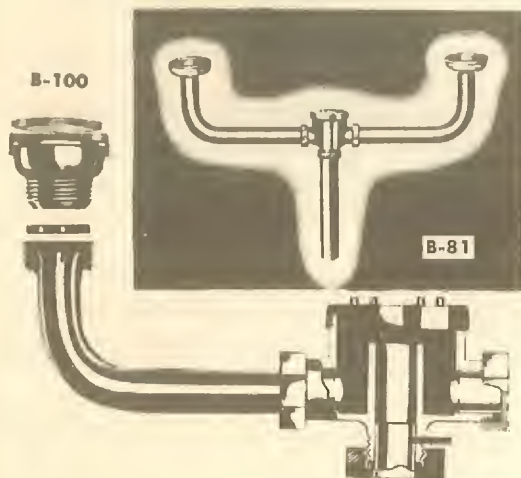

Universal Strainer Adapter

The No. SA-95 makes possible the attachment of single and double "Siphon" Traps to every make of sink. Made of solid cast metal; this ingenious fitting is adaptable to the standard 1½" x 1½" threaded strainers at top. It can be fitted to ¾" flared copper tubing at bottom.

- B-100 Strainer Adapter
- B-101 Adapter body
- B-102 Adapter slip nut
- B-103 Adapter washer

Bronzline Water Hose

Not affected by freezing. May be buried underground. Non-toxic — Safe — Tasteless. 400 lbs. P.S.I. burst pressure. May be wrapped with heat tape in winter to prevent freezing. Light weight. Solid brass fittings.

GUARANTEED SATISFACTION

M-300

Wt. 1¼ lbs.

Unless specified whether 4 or 8 hole sink required, 8 hole Bargman sink will be shipped.

Complete with aluminum moulding Deluxe models. Built of high-quality steel, finished in gleaming white porcelain enamel, triple coated for lasting beauty. E-Z drain sloping bottom (exclusive with Bargman), rounded corners for easier cleaning. Specially designed aluminum moulding for added beauty and sanitation.

- BP-10 Single sink 15⅞" x 17⅞" x 7" deep, 3¾" drain opening, less moulding
- BP-12 Single sink with moulding
- BP-13 Single sink moulding only
- BP-14 Two sinks complete with moulding
- BP-15 Moulding complete for two sinks
- BP-16 Center moulding only

Siphon Trap Assemblies

For Single E-Z Sink. ⅞" copper elbow (can be cut to any length desired), Cup pressure nut, 3 compressor nuts with rubber seals and one trap body, ⅞" copper or 1" iron pipe (not included) can be used from bottom.

B-80 Wt. 1½ lbs.

For Double E-Z Sink. Two ⅞" copper elbows (can be cut to any length required), 2 cup pressure nuts, 3 compressor nuts with rubber seals, one trap body, for ⅞" copper or 1" iron pipe (not included) can be used from bottom.

B-81 Wt. 2¼ lbs.

Replacement Parts for Siphon Traps

- B-82 Siphon trap cover
- B-83 Siphon trap cover gasket
- B-84 Siphon trap body
- BP-85 Siphon trap ⅞" tubing
- BP-86 Siphon trap pressure nut
- BP-87 Slip nut
- BP-88 Pressure nut gasket
- BP-89 Siphon trap slip nut gasket



Rocker Water Pump

Hand operated with short easy back and forth strokes. Fits anywhere on drain board. Swivel spout serves both single and double kitchen sinks. Solid brass throughout, exposed parts chrome plated. Self priming valve chamber assures instant flow of water.

B-25 Wt. 3 lbs.

Rubber Moulding

Provides water-tight seal around sinks and drainboards. No waste, as odd pieces can be mitered together. Available in 5-foot lengths only.

B-19



Black Magic Polyethylene Water Line

- High pressure (400 PSI)
- Tasteless, odorless, freezing will not injure hose
- 25-ft. length complete with adapters
- Guaranteed satisfaction

CA-1


Wt. 1¼ lbs.

Leslie's **THE SOUTH'S FIRST and FINEST**



Lawndale "Belmont" Double Sink
Lustrous white acid-resisting porcelain enamel over steel. Generous size: 18 x 32 x 7". 3 1/2" openings for dual strainers, centered.

L-25 Wt. 32 lbs.

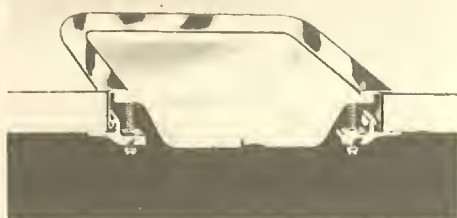

Stainless steel frame to fit the L-25 Lawndale "Belmont" double sink.

WL-25

Wt. 2 lbs.

Faucet Washers

Assorted sizes for every need. Molded neoprene rubber; for hot or cold water. Packed complete with bibb screws.

W-273 Faucet washers, per box

Lavatory Fixtures

High quality, smartly styled single-stream lavatory fixtures with spouts raised 1 3/8" above slab. Will fit any lavatory with 4" center drilling through slab.

M-210 With pop-up waste. Wt. 5 1/4 lbs.

M-211 With P.O. plug, chain and stopper. Wt. 3 1/2 lbs.

M-212 Less P.O. plug, chain and stopper. Wt. 2 3/4 lbs.

M-221 P.O. Plug

M-222 Washer only

Swing-Type Sink Faucets

Concealed deck type swing-spout sink faucets, with 8" centers, renewable seats, with drawn brass spout. Wt. 4 1/2 lbs.

M-206 With spray

M-207 With spray and aerator

M-208 Less spray

M-209 Less spray with aerator

Basket Type Sink Strainer

Brass-chrome plated. With stainless steel basket. 1 1/4" x 4". 22-gauge tailpiece.

M-213 Wt. 1 3/4 lbs.

M-220 Crumb cup only

Lavatory Faucet with Cross Handle

M-214 Wt. 1 1/2 lbs.

Sink strainer with 3" flange diameter—to fit 2 1/2" opening. Removable strainer plate.

No. CE-85

Wt. 2 lbs.

CE-91 Slip nut 1 1/2" with washer



B-22

B-29

Super Seal Sink Strainer

Solid brass forged body . . . chrome plated for a lasting finish. Available with or without tail-piece to fit pipe, hose or tubing connections. Removable crumb cup provides good seal when closed. For sinks with 2" drain opening. Wt. lb.

B-29 Complete for 1 1/4" to 1 1/2" pipe

B-22 Complete for 5/8" hose or 7/8" tubing

B-23 Crumb cup only



B-28

Chrome Filler Spout

Combination water intake fitting with sealing cover for filling of water tank with hose or pail. Made of cast white metal, Chrome plated. No funnel needed—tanks filled easily with hose or pail. Fits closely to trailer body.

B-28 Wt. 3/4 lbs.



B-24



City Water Intake Fittings

Made of iron pipe nipple, 6" long, with flat end, cast flange and standard female hose connection, complete with aluminum cap and chain. (End of nipple threaded to take standard flare fitting).

B-24 for 3/8" tubing

B-104 for 1/2" tubing chamfered to receive pressure fitting

B-106 for 3/8" tubing chamfered to receive pressure fitting

City Water Intake Fittings

A simple intake fitting, includes aluminum cap held by chain; standard female hose connection; pres.-fitted flange for mounting, and 5/8" x 18 threaded tailpiece for flare connection to copper tubing.

B-108 for 3/8" tubing

Pressure Fittings

B-118 for 3/8" pipe

B-119 for 1/2" pipe

Keep MOBILE HOME Bright and Shining



Leslie's Roofalume

Trailer roofing—a liquefied aluminum insulator. A combination of aluminum, waterproofing oils, asbestos and a rubber-like base. Will reduce interior temperature from 12 to 15 degrees due to its aluminum surface which acts as a light and heat reflector. Guaranteed to waterproof and weatherproof for three years. Will not crack, peel or blister. It forms a solid sheet of flexible aluminum over every pore in the trailer roof. Will expand and contract with roof movement. One gallon will cover 80 to 110 square feet of roof surface.

| | | |
|-------|------------------------|--------------|
| RL-1 | One-gallon can | Wt. 10 lbs. |
| RL-2 | Two-gallon can | Wt. 20 lbs. |
| RL-3 | Three-gallon can | Wt. 30 lbs. |
| RL-5 | Five-gallon can | Wt. 50 lbs. |
| RL-55 | Fifty-five gallon drum | Wt. 550 lbs. |



Trailer Roofing—A Liquefied Aluminum Insulator

Combination of pure flake aluminum, waterproofing oils, asbestos and a rubber-like base makes KOOL-SEAL the most outstanding contribution to trailer living-comfort.

Will reduce interior temperatures from 12 to 15 degrees due to its aluminum surface which acts as a light and heat reflector.

Guaranteed to waterproof and weatherproof for three years. Will not crack, peel or blister. It forms a solid sheet of flexible aluminum over every pore in the trailer roof. Will expand and contract with roof movement.

One gallon will cover 80 to 110 square feet of roof surface. Brush included free of charge with one gallon kit.

| | |
|------|------------------------------|
| E-90 | Quart. Wt. 3 1/4 lbs. |
| E-91 | Gallon. Wt. 10 1/2 lbs. |
| E-92 | Two gallons. Wt. 21 lbs. |
| E-93 | Three-gallon kit Wt. 32 lbs. |
| E-95 | Five-gallon kit Wt. 54 lbs. |

IMPORTANT NOTICE

On Leslie's Roofalume and/or Kool-Seal, Orders for 30 Gallons or More Will Be Shipped "Prepaid" from the Factory in Cleveland, Ohio.



Plasticeal Caulking in Tubes for light caulking. Won't crack or shrink. Can be painted over. Aluminum. 5 oz. tube.

E-100 Wt. 3/4 lb.



Spray Aluminum

Very bright aluminum color; dries instantly. In white enameled spray bomb can.

E-140 Wt. 2 lbs.



Pistol Grade Plasticeal Aluminum used in oilers to effectively and permanently seal joints, seams, window and door moldings and frames, etc. Permanently elastic, can be painted over with any type paint or blends well with bare aluminum surfaces.

| | |
|-------|---|
| E-101 | Dispenser with caulking. Wt. 1 1/2 lbs. |
| E-103 | 1/2-pint can. Wt. 1 1/2 lbs. |
| E-104 | Pint can. Wt. 2 1/4 lbs. |
| E-105 | Quart can. Wt. 4 1/2 lbs. |
| E-106 | Gallon can. Wt. 12 lbs. |
| E-107 | Plasticeal aluminum, spouted cartridge Wt. 1 1/2 lbs. |
| E-109 | Oiler only. Wt. 1 lb. |

Electrogrip Rubber Cement

For patching awnings; also under rubber strip for weatherstripping.

| | |
|-------|-----------------------------|
| E-110 | 2-oz. tube. Wt. 3/4 lb. |
| E-111 | 1-lb. tube. Wt. 1 lb. |
| E-112 | Pint can. Wt. 2 1/4 lbs. |
| E-113 | Quart can. Wt. 4 1/2 lbs. |
| E-114 | Gallon can. Wt. 16 1/4 lbs. |



Special Adhesive, a black liquid bonding cement for patching roofs. Very strong in adhesive qualities; used to hold membrane in place when patching a crack, loose or torn material, seams, or over nails in a roof that are working loose; applied with ordinary brush onto bad surface and the membrane is applied directly into it; work adhesive over edges of membrane as that is to be covered.

| | |
|-------|------------------------|
| E-120 | Pint. Wt. 2 lbs. |
| E-121 | Quart. Wt. 3 lbs. |
| E-122 | Gallon. Wt. 10 lbs. |
| E-123 | 5 Gallons. Wt. 46 lbs. |

Membrane; a close weave asphalt impregnated cloth to be used in conjunction with SPECIAL ADHESIVE.


| | |
|-------|---------------------------------|
| E-130 | 6" wide by 150' long. Per roll |
| E-131 | Cut to order (6"). Per foot |
| E-132 | 12" wide by 150' long. Per roll |
| E-133 | Cut to order (12"). Per foot |

Leslie's THE SOUTH'S FIRST and FINEST



Tuck Quality Caulking, guaranteed for body caulking and sealing jobs. Meets federal specifications on government jobs. Natural only.

- E-81 Cartridge. Wt. 1/2 lb.
- E-82 Spouted cartridge. Wt. 1 lb.
- E-83 Quart can. Wt. 3 1/2 lbs.
- E-84 Gallon can. Wt. 12 lbs.
- E-85 5-gallon steel pail. Wt. 47 lbs.

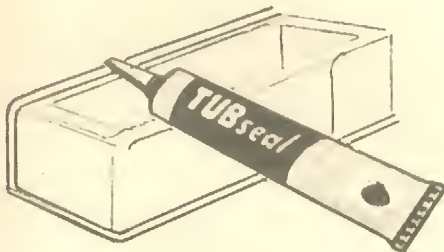

Tub-Seal

Easy to handle, long lasting rubber base sealer. Use around tub, sink or shower stall; perfect for ceramic tile. Does not become brittle. Completely waterproof.

- E-70 4 1/2 oz. tube. Wt. 1/2 lb.



Weatherstrip Cement

A black cement for attaching rubber weather strips to windshields, windows, ventilators, truck lids and doors, also for cementing rubber mats.

- E-75 Wt. 1 lb.

Preservo for Canvas

Waterproofs canvas and leaves the fabric soft and pliable.

- BA-50 gal. Wt. 7 1/2 lbs.
- BA-51 qt. Wt. 1 1/4 lbs.



TEN-X Sealing Compound


Heavy bodied, weatherproof for sealing dry mouldings, windows, windshields and front shields, sponge rubber strips, welded seams, etc.

- | | |
|-------------------------------|----------------|
| E-50 Black, 5 oz. tube | Wt. 1/2 lb. |
| E-51 Aluminum, 5 oz. tube | Wt. 1/2 lb. |
| E-52 Clear, 5 oz. tube | Wt. 1/2 lb. |
| E-53 Aluminum, pint can | Wt. 1 1/4 lbs. |
| E-54 Clear, pint can | Wt. 1 1/4 lbs. |
| E-55 Black, pint can | Wt. 1 1/4 lbs. |
| E-57 Black, quart can | Wt. 2 1/4 lbs. |
| E-61 Aluminum, quart can | Wt. 2 1/4 lbs. |
| E-62 Clear, quart can | Wt. 2 1/4 lbs. |
| E-63 Black, 1/2 gallon can | Wt. 6 lbs. |
| E-64 Aluminum, 1/2 gallon can | Wt. 6 lbs. |
| E-65 Clear, 1/2 gallon can | Wt. 6 lbs. |
| E-67 Black, gallon can | Wt. 9 lbs. |
| E-68 Aluminum, gallon can | Wt. 9 lbs. |
| E-69 Clear, gallon can | Wt. 9 lbs. |

Midget Tube Clear TEN-X will completely seal an automobile windshield and rear window.

- E-80 Wt. 1/2 lb.

Admiral Caulking



An airtight, waterproof, elastic filler. Will not harden, crack, or leave sides of seams. Can be painted over and will not bleed through paint. For window glazing, wood or steel sash; sealing around doors, window frames, cracks in cement, auto bodies and trailers.

- I-1 Half pint. Wt. 1 1/2 lbs.
- I-2 Pint. Wt. 2 lbs.
- I-3 Quart. Wt. 3 1/2 lbs.
- I-4 Gallon. Wt. 12 lbs.

Aluminum Paint

Chrome Finish ready mixed aluminum paint. Heat proof—Rust proof—Weather proof.

- I-36 Pint. Wt. 2 lbs.
- I-37 Quart. Wt. 3 lbs.
- I-38 Gallon. Wt. 9 1/2 lbs.



K-8

"909" Caulking Compound

Adheres to all surfaces. Will not dry out, shrink, or crack. Stops moisture. Remains flexible. Scientifically developed aluminum sealing and caulking compound for windows, doors, seams, mouldings, ventilators.

- K-3 Half pint can. Wt. 1 1/4 lbs.
- K-4 Pint can. Wt. 2 1/4 lbs.
- K-5 Quart can. Wt. 3 1/2 lbs.
- K-6 Gallon can. Wt. 11 lbs.
- K-8 Plastic dispenser with 8 oz. "909" caulking. Wt. 1 lb.

"STORMY WEATHER" Lasting Protection Against WEATHER and MILDEW



The "dry" water repellent that does not stiffen canvas; easy to use; coverage averages 100 to 120 sq. ft. per gallon—varying according to condition of fabric; from 6% to 20% is added to the tensile strength of canvas thread when treated with "Stormy Weather."

- SW-1 One-gallon can Wt. 8 lbs.

STOP FROZEN WATER PIPES

LINE-O-HEAT

EASY-HEAT

Complete EASY-HEAT Kits—easily installed without tools, provide safe, winter-long protection against freezing! All models connected to UL-approved lead wire and molded plug for any A.C. or D.C. 110 or 120-volt outlet.



packaged with wrapping—to keep water and waste lines from freezing. Easy to install.


- LT-3 (LHT3K) protects up to 3' of pipe
- LT-6 (LHT6K) protects up to 6' of pipe
- LT-12 (LHT12K) protects up to 12' of pipe
- LT-20 (LHT20K) protects up to 20' of pipe
- LT-30 (LHT30K) protects up to 30' of pipe
- LT-40 (W1-20) insulation—20' roll
- LT-41 (GW1-25) 2-20' rolls insulation with 1-25' roll fiberglass blanket,

LT-46 (TSA1035) Adjustat, adjusted temperature control



Switch-&-Outlet for Water Heater
Outlet for plugging in water heaters with toggle-type on-off switch, complete with mounting box Pilot light.

- H-100 Water heater switch.
- H-101 Glo-Lite only.



Tiny Electric Water Heater
Simply immerse in water and plug in for instantaneous hot water. Operates on 110-120 volt AC or DC current.

L-10 Wt. ¾ lb.


AUTOMATIC Heat Tape— THERMOSTAT built in!

| Model Number | Length of Unit |
|--------------|----------------|
| EZ-A3 | 3' |
| EZ-A6 | 6' |
| EZ-A12 | 12' |
| EZ-A18 | 18' |
| EZ-A24 | 24' |

Saves electricity— operates only when pipes approach freezing. Wire sewn on insulating tape. Includes outer wrap.



Regular Heat Tape

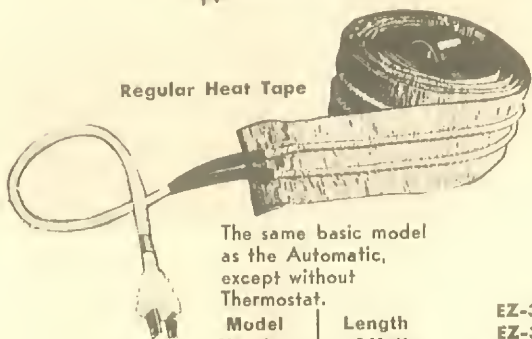

The same basic model as the Automatic, except without Thermostat.

| Model Number | Length of Unit |
|--------------|----------------|
| EZ-3 | 3' |
| EZ-6 | 6' |
| EZ-12 | 12' |
| EZ-18 | 18' |
| EZ-24 | 24' |

| Model Number | Approx. Pipe Length Protected |
|--------------|-------------------------------|
| EZ-B3 | up to 3' |
| EZ-B6 | 3' to 6' |
| EZ-B12 | 6' to 12' |
| EZ-B18 | 12' to 16' |
| EZ-B24 | 18' to 24' |

Band



| Model Number | Approx. Pipe Length Protected |
|--------------|-------------------------------|
| EZ-C3 | up to 3' |
| EZ-C6 | 3' to 6' |
| EZ-C12 | 6' to 12' |
| EZ-C18 | 12' to 18' |
| EZ-C24 | 18' to 24' |

Cable




ACCESSORIES

- EZ-30 (EZ-T) Automatic thermostat
- EZ-31 (EZ-P) Complete insulating package
- EZ-32 (EZ-G) 25' of 3" fiberglass

NO-FREEZE

Wrap-On Cable



Stick-On Tape



- NF-21 (T-3) 3'
- NF-22 (T-6) 6'
- NF-23 (T-9) 9'
- NF-24 (T-13) 13'
- NF-25 (T-18) 18'

For temperature and pressure protection. Pressure control-range 50-200 PSI. Special alloy plug assuring positive protection against temperatures in excess of 210° F. ¾" IPS male inlet and ¾" IPS female drain outlet.

P-20 Relief Valve

WH-111 Water heater bulb



- NF-1 (A-6) under 3'
- NF-2 (B-12) 3' to 6'
- NF-3 (M-26) 6' to 12'
- NF-4 (P-40) 12' to 18'
- NF-5 (J-56) 18' to 26'
- NF-6 (S-112) 26' to 52'
- NF-7 (L-220) 52' to 100'

NF-10 FAM thermostat

NF-14 Wrap-on insulation

DUO-THERM Roof Mounted Air Conditioner

To Make Mobile Homes More Liveable—Cools—Filters—
—Dehumidifies—Circulates—Ventilates—Exhausts—

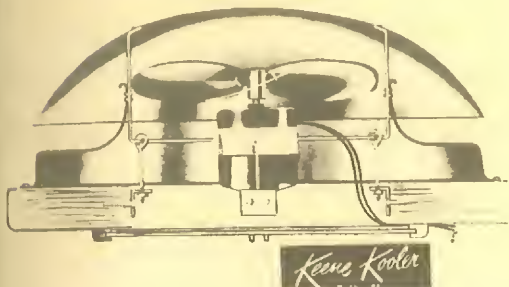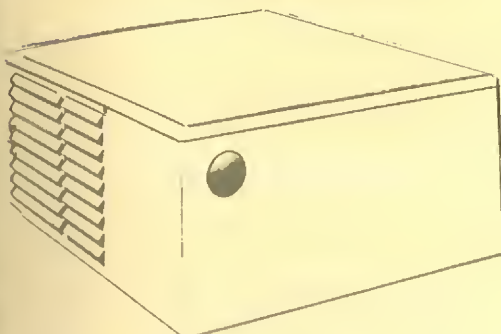

COMPACT—Takes no living space, no ducts; extends 3" below ceiling, 15" above roof.

ROOF MOUNTED—To beat heat at its source; cool air flows downward, warm inside air removed with aid of natural circulation.

BIG PERMANENT TYPE FILTER—Leaves air dust-free, pollen-free, dehumidified.

CONVENIENT ON-OFF CONTROL—Has 4 positions for low or high-speed cooling or ventilating; limit switch prevents "overcooling"; provides up to 11 changes of air an hour; used as ventilator to remove stale air, cooking odors.

COMPRESSOR—Hermetically sealed in oil for lifetime lubrication; refrigerant system warranted for 5 years; powered by 2-speed direct driven motor; full 10" 4-bladed fan.

DIMENSIONS: 25½" wide, 31" long, 14½" high.

DT-57 (100-A-8) 1-ton Special, 9,000 BTU, 115 volt Wt. 207 lbs.

DT-58 (100-8) 1-ton Deluxe, 11,000 BTU, 230 volt Wt. 212 lbs.

DT-59 (150-8) 1½-ton, 13,500 BTU, 230 volt, Wt. 217 lbs.

Keene Kooler

Fits over 12" x 16" or 14" x 14" ventilators; outside mounting flange 24¼" overall; outside dome diameter 2" x 8" high; 110 volt motor with oil sealed bearings; 14" fan with adjustable speeds; airflow capacity approx. 1550 CFM at high speed; inside garnish for controlled air flow; leakproof ventilation combined with quiet operation assures continuous flow of healthful air without disturbing noise; smoke, heating fumes, cooking odors and other odors removed immediately . . . in all kinds of weather; simple installation.

K-25 Wt. 24 lbs.

K-26 Switch for Keene Kooler



Air Conditioner


These units filter, cool, dehumidify and circulate air to dispel heat, discomfort, dust and noise problems of hot weather. Air circulated with fan alone, or thermostatically controlled. Adjustable louvers on front of unit permit the discharge of air in desired direction. Clean air is assured by a permanent type aluminum filter that washes clean in water. Operates on 115 volt. Mounts on floor over a 13 x 15 hole. Ratings according to ARI standard #110-56. Both models measure 15" wide, 29¼" deep and 29¾" high.

¾-horsepower, 8100 BTU, uses 15 ampere branch circuit, 115 volt.


C-75 Three-quarter horsepower

1-horsepower, 9700 BTU, uses single outlet 20 ampere branch circuit, 115 volt.

C-76 One horsepower

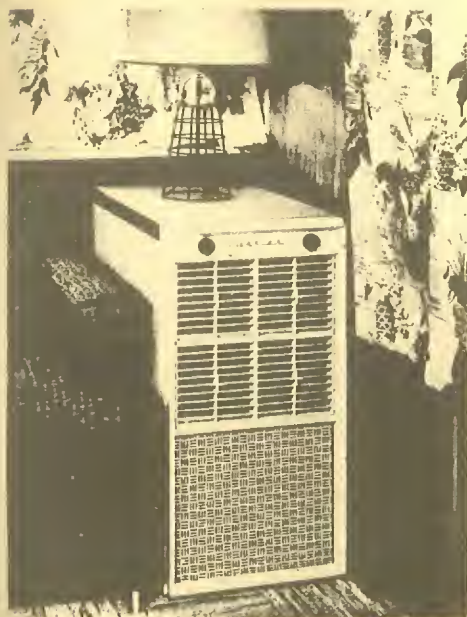

L-B TRAILER EXHAUST FAN

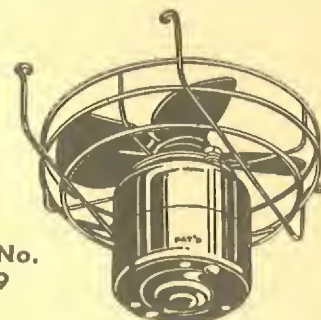

LB-1

Mfrs. No. 1759


Silent in operation; easily installed with 4 screws furnished; fits over any porthole not exceeding 6" in diameter; can be permanently fixed over ventilating pipe above stove without interfering with screen or slide closer; size approximately 5" across; 110 volts A.C.

LB-1 (1759)

Wt. 2½ lbs.



UTILITY FAN

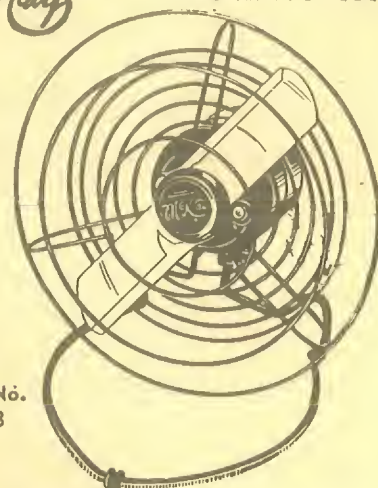

LB-2

Mfrs. No. 1743

Folds into itself. 8" propeller type blade, quiet motor; 110 volt A.C.; hangs on wall, stands on table, tips to any angle.

LB-2 (1743)

LB Heat Circulating and Ventilating Fan



Mfrs. No. 1762

KEEP COZY!

This fan has special motor strong enough to circulate warm air, yet slow enough not to create drafts; may be used over stove as illustrated, or to direct heat to cold spots; adjustable to any direction; silent operation, easy installation; 5" blades; 110 volt A.C.

LB-3 (1762)

Leslie's

THE SOUTH'S FIRST and FINEST

Look to Leslie's

for everything
from a part of a part
to a complete

Lesliline Parts Department



Our package units put you, the Dealer, in the "Parts" business in less than one hour. The cabinet is one uniform size for our "Junior" package and "Senior" package. Dimensions are: 4 feet wide by 6 feet, 9 inches high, and 24 inches deep; with approximately 36 cubic feet of storage space . . . ample display space . . . and a serving counter. Install a "Lesliline Parts Department" and watch parts sales increase!

A **LESLILINE PARTS DEPARTMENT** incorporates the best elements of modern merchandising

- * An effective point-of-sale **ADVERTISING** medium.
- * An attractive **DISPLAY** unit that stimulates impulse buying.
- * An incentive to greater **PERSONAL SELLING EFFORTS** by your sales staff.

Each "**LESLILINE PARTS DEPARTMENT**" is a self contained, easy to set up stock department that will increase your dollar volume at low investment cost and bring in new customers and prospects by rendering the most needed service in the mobile home industry today — readily accessible parts, accessories and supplies for the repair, maintenance and improvement of the individual mobile home.

For full information about the **LESLILINE PARTS DEPARTMENT** that will best fit into your operation write to Dealer Merchandising Department, Leslie Mobilehome Supplies, 1920 Stewart Ave., S. W., Atlanta 15, Georgia.

Leslie **MOBILEHOME SUPPLIES**

Leslie MOBILEHOME SUPPLIES

1920 STEWART AVENUE, S. W.

ATLANTA 15, GEORGIA

Office Telephones: POplar 6-3666 and 7

Nights and Sundays: TRinity 2-3733 — TRinity 4-1216

Retail Price List

Catalog No. 11

ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE

10% HANDLING CHARGE ON ALL ACCOMMODATION RETURNS FOR EXCHANGE OR CREDIT.

| Page No. | STOCK NO. | LIST | Page No. | STOCK NO. | LIST | Page No. | STOCK NO. | LIST |
|----------|--------------------|--------|----------|---|-------|----------|------------------|-------|
| 1 | AC-1 (GD-2114DP-2) | 97.25 | 4 | B-24 | 26.95 | 5 | N-30 (491), pair | 43.20 |
| 1 | AC-2 (GB-2211DP) | 141.75 | 4 | B-25 | 26.95 | 5 | N-31 (492), each | 2.30 |
| 1 | AC-3 (GB-2211DP-2) | 151.80 | 4 | B-26 | 26.95 | 5 | T-40, set of 4 | 16.95 |
| 1 | AC-4 (GB-3312DP-2) | 175.85 | 4 | B-27 | 26.95 | 5 | T-41, each | 4.75 |
| 1 | AC-5 (F-2000) | 43.80 | 4 | B-31 | 32.95 | 5 | TD-15, set of 4 | 17.95 |
| 1 | AC-6 (D-2016P-2) | 71.75 | 4 | B-32 | 32.95 | 5 | TD-16, each | 4.95 |
| 1 | AC-7 (P26-K) | 15.80 | 4 | B-33 | 26.95 | 6 | A-1 (97) | 15.10 |
| 1 | AC-8 (P36-K) | 22.20 | 4 | B-36 | 26.95 | 6 | A-2 (97) | 9.60 |
| 1 | AC-9 (TIK) | 8.45 | 4 | B-38 | 32.95 | 6 | A-3 | .60 |
| 1 | AC-10 (SR-2010-2) | 108.15 | 4 | B-40 | 29.75 | 6 | A-4 (925) | 11.75 |
| 1 | AC-11 (SR-2010P-2) | 122.50 | 4 | B-43 (See also A-43) | 21.50 | 6 | A-5 (625) | 15.75 |
| 1 | AC-20 (550) | 3.15 | 4 | B-44 | 29.75 | 6 | A-13 | 2.10 |
| 1 | AC-21 (555) | 4.65 | 4 | B-48 | 29.75 | 6 | A-14 | 3.75 |
| 1 | AC-22 (556) | 5.35 | 4 | B-49 | 29.75 | 6 | A-16 | 3.75 |
| 2 | EL-1 (D) | 81.50 | 4 | B-50 | 29.75 | 6 | A-20 (711) | 6.75 |
| 2 | EL-2 (B) | 62.50 | 4 | B-51 | 29.75 | 6 | A-21 | .10 |
| 2 | EL-3 | 6.25 | 4 | B-52 | 29.75 | 6 | A-22 | .20 |
| 2 | EL-4 | 6.25 | 4 | B-53 | 29.75 | 6 | A-25 (914) | 10.50 |
| 2 | EL-5 (DC) | 87.50 | 4 | B-60 | 26.95 | 6 | A-29 | 10.95 |
| 2 | EL-8 (D) | 91.50 | 4 | B-61 | 26.95 | 6 | A-30 (378) | 4.25 |
| 2 | EL-9 (B) | 69.50 | 4 | B-62 | 26.95 | 6 | A-31 (379) | 4.25 |
| 2 | EL-10 | 7.50 | 4 | B-63 | 29.75 | 6 | A-32 (801) | 5.25 |
| 2 | EL-11 | 7.00 | 4 | B-64 | 29.75 | 6 | A-34 | .17 |
| 2 | EL-12 | 7.00 | 4 | B-65 | 29.75 | 6 | A-35 (420 & 720) | 23.70 |
| 2 | EL-14 | 23.50 | 4 | C-7 | 17.50 | 6 | A-36 | 3.50 |
| 2 | EL-15 | 23.50 | 4 | C-8 | 15.75 | 6 | A-37 | 6.45 |
| 2 | EL-16 | 9.50 | 4 | C-9 | 17.50 | 6 | A-38 (420-1) | 4.75 |
| 2 | EL-17 | 9.50 | 4 | C-11 | 17.50 | 6 | A-39 | .61 |
| 2 | EL-26 | 22.50 | 4 | C-12 | 18.50 | 6 | A-40 | .28 |
| 2 | EL-27 | 22.50 | 4 | C-13 | 17.50 | 6 | A-41 | .70 |
| 2 | EL-28 | 9.50 | 4 | C-17 | 13.50 | 6 | A-42 (720) | 8.95 |
| 2 | EL-29 | 9.50 | 4 | C-18 | 17.50 | 6 | A-43 | .75 |
| 2 | EL-40 | 137.50 | 4 | C-19 | 13.50 | 6 | A-44 (420) | 14.75 |
| 2 | EM-5 | 114.95 | 4 | A-100 HD | 24.95 | 6 | A-45 (101) | 2.75 |
| 2 | G-10 | 132.50 | 4 | B-13 HD | 32.95 | 6 | A-46 | 3.96 |
| 2 | G-11 | 89.50 | 4 | B-14 HD | 32.95 | 6 | A-47 (922) | 12.50 |
| 2 | T-21 | 79.00 | 4 | B-15 HD | 32.95 | 6 | A-48 (420 & 922) | 27.25 |
| 2 | T-22 | 11.00 | 4 | B-16 HD | 30.95 | 6 | A-49 (6890) | .30 |
| 2 | T-28 (410 P & C) | .40 | 4 | B-17 HD | 32.95 | | | |
| 2 | T-29 (534 R & X) | 18.00 | 4 | B-19 HD | 32.95 | | | |
| 2 | WW-1 | 159.50 | 4 | B-20 HD | 30.95 | | | |
| 3 | AB-1 | 129.50 | 4 | AL-24, each | 2.35 | | | |
| 3 | AB-5 | 84.50 | 4 | AL-25, each | 2.00 | | | |
| 3 | R-10, set of 4 | 17.95 | 4 | AL-26 | 2.50 | | | |
| 3 | R-11 | 5.00 | 4 | Additional cost for heavy-duty sets (add to Std. Pkg. price): | | | | |
| 3 | R-30 | 44.95 | 4 | "A" Series | 6.45 | | | |
| 3 | R-40 | 19.95 | 4 | "B" Series | 4.00 | | | |
| 3 | R-45, pair | 12.95 | 5 | A-50 | .95 | | | |
| 3 | R-46, pair | 11.95 | 5 | A-120 | 14.95 | | | |
| 3 | R-47, pair | 10.95 | 5 | BF-1 | 32.50 | | | |
| 3 | R-50 | 117.95 | 5 | BF-2 | 45.00 | | | |
| 3 | R-51 | 75.95 | 5 | CA-10 (B52) set of 4 | 17.95 | | | |
| 3 | R-55 | 64.95 | 5 | CA-11 (B52) each | 5.00 | | | |
| 3 | R-56 | 122.50 | 5 | F-25 | 8.15 | | | |
| 3 | R-57 | 79.95 | 5 | K-10, set of 4 | 17.95 | | | |
| 4 | A-11 | 18.50 | 5 | K-11, each | 4.95 | | | |
| 4 | A-12 | 21.50 | 5 | N-25 (460) | 6.25 | | | |
| 4 | A-13 | 21.50 | 5 | N-27 (462) | 1.32 | | | |
| 4 | A-14 | 21.50 | 5 | N-28 (422) | 1.59 | | | |
| 4 | A-15 | 21.50 | 5 | N-29 (490), pair | 38.61 | | | |
| 4 | A-43 (See B-43) | 21.50 | | | | | | |
| 4 | A-100 | 18.50 | | | | | | |
| 4 | B-21 | 26.95 | | | | | | |
| 4 | B-22 | 26.95 | | | | | | |
| 4 | B-23 | 26.95 | | | | | | |

*-This item shipped F. O. B. Factory.

Prices are based on those prevailing at time of shipment.

| Page No. | STOCK NO. | LIST |
|----------|----------------|--------|
| 7 | EC-25 | 4.35 |
| 7 | EC-26 | 5.45 |
| 7 | HB-11 (88B) | 16.50 |
| 7 | HB-12 (50P) | 21.95 |
| 7 | HB-15 (55P) | 22.50 |
| 7 | HB-22 | 1.95 |
| 7 | HB-23 | 1.95 |
| 7 | HB-24 | 3.25 |
| 7 | HB-40 (84B) | 20.25 |
| 7 | HB-41 | 5.25 |
| 7 | M-40 (MC-542) | 4.95 |
| 7 | M-48 (MC-505) | 2.05 |
| 7 | M-49 (MC-507) | 6.65 |
| 7 | M-50 (MC-553) | 9.80 |
| 7 | M-52 (MC-509) | 1.75 |
| 7 | M-53 (MC-551) | 6.60 |
| 7 | M-90 (MC-1055) | 27.45 |
| 7 | M-91 (MC-574) | 8.95 |
| 7 | M-92 | 16.45 |
| 7 | M-93 (MC-566) | 9.80 |
| 7 | M-94 (MC-1053) | 30.65 |
| 7 | M-95 (MC-1054) | 32.15 |
| 7 | M-96 (MC-540) | 3.75 |
| 7 | M-97 (MC-564) | 10.50 |
| 7 | M-98 (MC-571) | 11.80 |
| 7 | T-24 (24) | 3.50 |
| 7 | T-25 (25) | 3.75 |
| 7 | T-34 (34) | 4.25 |
| 7 | T-35 (35) | 4.75 |
| 8 | HA-25 | 17.00 |
| 8 | HA-26 | 17.50 |
| 8 | HA-28 | 2.40 |
| 8 | HA-29 | 2.55 |
| 8 | HA-30 | 2.30 |
| 8 | HA-31 | 2.45 |
| 8 | HA-35 | 13.95 |
| 8 | HA-36 | 15.95 |
| 8 | HA-37 | 14.00 |
| 8 | HA-38 | 16.50 |
| 8 | HA-45 | 2.25 |
| 8 | HA-46 | 9.50 |
| 8 | HA-47 | 8.70 |
| 8 | HA-48 | 17.50 |
| 8 | HA-49 | .55 |
| 8 | HA-50 | 2.50 |
| 8 | HA-51 | 9.90 |
| 8 | HA-52 | 9.85 |
| 8 | HA-53 | 18.75 |
| 8 | HA-54 | .60 |
| 8 | SBC-6 | 21.25 |
| 8 | SBC-12 | 24.55 |
| 8 | SBC-20 | 10.95 |
| 8 | SBC-25 | 10.95 |
| 8 | ST-1 | 113.40 |
| 8 | ST-2 | 167.81 |
| 8 | ST-10 | 42.20 |
| 8 | ST-11 | 51.37 |
| 8 | ST-12, pair | 51.52 |
| 8 | ST-30 | 14.47 |
| 8 | ST-50 | 39.95 |
| 9 | BP-179 (63BD) | 4.22 |
| 9 | CH-230 | 1.05 |
| 9 | H-20 | 134.75 |
| 9 | H-23 (3378-A) | 2.33 |
| 9 | H-25 | 7.70 |
| 9 | H-26 (1-26002) | 90.83 |
| 9 | H-27 (5882-N) | 10.78 |
| 9 | H-28 (40101) | 21.21 |
| 9 | H-29 (3377-A) | 2.84 |

| Page No. | STOCK NO. | LIST |
|----------|-------------------------|------------------|
| 9 | H-32 (8183-A) | 23.81 |
| 9 | H-33 | 19.85 |
| 9 | H-35 | 4.40 |
| 9 | H-44 (3456) | 16.63 |
| 9 | H-45 (3448) | 12.83 |
| 9 | H-46 (11326) | 6.50 |
| 9 | H-47 (2843-A) | 3.78 |
| 9 | H-48 (2843-D) | 3.78 |
| 9 | H-49 (4711G) | 22.12 |
| 9 | H-50 (4671-A) | 13.93 |
| 9 | H-51 (4672A) | 13.93 |
| 9 | H-52 (5847D) | 13.15 |
| 9 | H-53 (11738A) | .22 |
| 9 | H-54 (11872) | .18 |
| 9 | H-55 (2873) | 1.81 |
| 9 | H-74 (BLN16R) | 9.05 |
| 9 | H-76 (3378) | 3.54 |
| 9 | H-77 (3377) | 3.54 |
| 9 | H-80 (1-26009) | 26.95 |
| 9 | H-81 (21119) | 3.78 |
| 9 | H-82 (21122) | 3.78 |
| 9 | KH-1 (39743) | 19.60 |
| 9 | KH-2 (41149) | 4.30 |
| 9 | KH-122-1 (30963) | 77.40 |
| 9 | KH-122-2 (39742) | 74.50 |
| 9 | KH-102-2 (40839) | 59.65 |
| 10 | B-70 (60-Q-3-B) | 2.10 |
| 10 | B-71 (60-Q-3-F) | 2.30 |
| 10 | B-73 (60-Q-3-M) | 2.10 |
| 10 | BP-1 (No. 8, 3), ft. | .78 |
| 10 | BP-2 (60-Q-3-CA) | 3.12 |
| 10 | BP-3 (60-Q-3-X) | 2.98 |
| 10 | BP-4 (60-Q-3-XA) | 5.08 |
| 10 | BP-5 (60-Q-3-A) | 2.68 |
| 10 | BP-39 (60-Q-3-RW) | 2.20 |
| 10 | BP-149 (60-Q-3-RPW) | 2.83 |
| 10 | BP-150 (60-Q-3-PRO) | 7.77 |
| 10 | BP-151 (60-Q-3-PR) | 4.13 |
| 10 | BP-153 (60-Q-3) | 3.90 |
| 10 | BP-240 (60-Q-3-RP) | 2.43 |
| 11 | BP-154 (60-Q-3K) | Price on request |
| 11 | BP-200 (50-A) | 15.90 |
| 11 | BP-201 (50-B) | 9.50 |
| 11 | BP-202 (50-F) | 8.50 |
| 11 | BP-205 (50-A-XA) | 19.83 |
| 11 | BP-206 (50-A-X) | 9.20 |
| 11 | BP-210 (50 PR & 50-A-M) | 30.00 |
| 11 | BP-211 (50-A-PR) | 21.63 |
| 11 | BP-212 (50-A-M) | 10.63 |
| 11 | BP-215, ft. | 1.30 |
| 11 | BP-216 (50-A-R) | 11.88 |
| 11 | BP-217 (50-A-RM) | 19.88 |
| 11 | BP-218 (50-A-RB) | 8.75 |
| 11 | BP-220 (50-A-K) | Price on request |
| 11 | BP-230 (3550) | 39.00 |
| 11 | BP-231 (3551) | 39.00 |
| 11 | BP-235 | 49.20 |
| 11 | BP-236 | 49.20 |
| 12 | B-17 (721), 6 V. | 2.12 |
| 12 | B-18 (723), 6 V. | 2.55 |

| Page No. | STOCK NO. | LIST |
|----------|----------------------|-------|
| 12 | B-66 (46-9), 6 V. | .86 |
| 12 | B-67 (46-9-2) | .37 |
| 12 | B-68 (46-9-4) | .13 |
| 12 | B-69 (48), 6 V. | .71 |
| 12 | B-90 (LB-10) | .76 |
| 12 | B-91 (721-2) | .54 |
| 12 | B-92 (721-5) | .32 |
| 12 | B-127 (721), 12 V. | 2.16 |
| 12 | B-128 (723), 12 V. | 2.59 |
| 12 | B-130 (46-9), 12 V. | .91 |
| 12 | B-131 (48), 12 V. | .76 |
| 12 | B-215 (58-Q-81) | .96 |
| 12 | B-220 (58-Q-8) | 1.88 |
| 12 | B-221 | 1.16 |
| 12 | B-222 (58-Q-4-1) | .70 |
| 12 | B-223 (58-Q-15) | 1.12 |
| 12 | BP-67 (46-9-2) | .37 |
| 12 | BP-70 (8), 6 V. | 2.76 |
| 12 | BP-71 (9), 6 V. | 3.41 |
| 12 | BP-97 | 1.08 |
| 12 | BP-98 | .15 |
| 12 | BP-135 (8), 12 V. | 2.89 |
| 12 | BP-136 (9), 12 V. | 3.46 |
| 12 | BP-160 | .48 |
| 12 | BP-161 | .48 |
| 12 | BP-162 | .48 |
| 12 | BP-163 | .22 |
| 12 | BP-164 | .22 |
| 12 | BP-165 | .38 |
| 12 | BP-166 | .38 |
| 12 | BP-167 | .16 |
| 12 | BP-168 | .16 |
| 12 | BP-180 (56-AC) | 10.15 |
| 12 | BP-181 (56-A) | 3.78 |
| 12 | BP-182 | 2.68 |
| 12 | BP-183 | 2.14 |
| 12 | BP-184 | .26 |
| 12 | BP-185, ft. | .56 |
| 12 | BP-186 (43-T) | 1.62 |
| 12 | BP-189 | 1.19 |
| 12 | BP-190 (57-AC) | 12.85 |
| 12 | BP-191 (57-A) | 4.86 |
| 12 | BP-192 | 3.22 |
| 12 | BP-193 | 2.68 |
| 12 | BP-194 | .26 |
| 12 | BP-195, ft. | .56 |
| 12 | BP-196 (47-TB) | 2.38 |
| 12 | BP-9812 (98), 12 V. | 3.21 |
| 12 | BP-9868 (98), 6-8 V. | 3.08 |
| 12 | BP-9912 (99), 12 V. | 3.82 |
| 12 | BP-9968 (99), 6-8 V. | 3.78 |
| 13 | G-1 | 1.56 |
| 13 | G-2 | 1.56 |
| 13 | G-3 | .22 |
| 13 | G-4 | .22 |
| 13 | G-5 | 1.63 |
| 13 | G-6 | 1.63 |
| 13 | G-7 | .55 |
| 13 | G-8 | .55 |
| 13 | G-9 | .14 |

Prices are based on those prevailing at time of shipment.

| Page No. | STOCK NO. | LIST |
|----------|---------------------|-------|
| 13 | M-3 (PC-506) | 1.05 |
| 13 | M-4 (PC-505) | 1.05 |
| 13 | M-5 (PC-504) | 1.16 |
| 13 | M-6 (PC-503) | 1.16 |
| 13 | M-7 (PC-1001) | 4.25 |
| 13 | M-8 (PC-1000) | 4.10 |
| 13 | M-9 (PC-501) | 3.00 |
| 13 | M-10 (PC-500) | 1.64 |
| 13 | M-11 (PC-100) | .45 |
| 13 | M-20 (PC-508) | 1.65 |
| 13 | M-21 (PC-507) | 2.65 |
| 13 | M-30 (PC-1003) | 2.61 |
| 13 | M-31 (PC-1010) | 8.00 |
| 13 | M-32 | 4.00 |
| 13 | M-33 | 4.00 |
| 14 | B-206 (206) | .48 |
| 14 | B-208 (208) | .40 |
| 14 | B-209 (209) | .64 |
| 14 | B-210 (210) | .76 |
| 14 | B-211 (211) | 1.14 |
| 14 | BP-40 (59) | .66 |
| 14 | CH-200 | .70 |
| 14 | CH-227 | 1.19 |
| 14 | CH-228 | .50 |
| 14 | HH-1 (7101) | 1.26 |
| 14 | HH-2 (8808) | 1.13 |
| 14 | HH-3 (3221) | .80 |
| 14 | HH-4 (3223) | 1.32 |
| 14 | HH-5 (3321) | 1.71 |
| 14 | HH-6 (3323) | 2.63 |
| 14 | HH-7 (3421) | 2.38 |
| 14 | HH-8 (3423) | 3.30 |
| 14 | X-3 | .20 |
| 14 | X-6 | .60 |
| 14 | X-9 | .40 |
| 15 | BP-1, ft. | .78 |
| 15 | G-55, ft. | .15 |
| 15 | G-56, 100 ft. spool | 7.50 |
| 15 | G-64, ft. | .40 |
| 15 | G-65, 100 ft. spool | 30.75 |
| 15 | G-68, ft. | .75 |
| 15 | G-69, 100 ft. spool | 55.00 |
| 15 | HL-1 (MED 5000-1) | 3.95 |
| 15 | HL-2 (MED 5000-2) | 1.95 |
| 15 | HL-3 (MED 5000-3) | 19.95 |
| 15 | HL-4 (MED 5000-4A) | 4.50 |
| 15 | HL-11 (MED 5001-1) | 5.50 |
| 15 | HL-13 (MED 5001-2) | 29.95 |
| 15 | HL-14 (MED 5000-4B) | 4.50 |
| 15 | HL-20 (MED 5004) | 2.50 |
| 15 | HL-21 (MED 5004-1) | 6.95 |
| 15 | HL-22 (MED 5004-2) | 6.50 |
| 15 | HL-23 (MED 5004-3) | 4.50 |
| 15 | HL-24 (MED 5004-4) | 3.95 |
| 15 | HL-25 (MED 5005) | 4.50 |
| 15 | HL-30 (MED 5002-15) | 16.95 |

| Page No. | STOCK NO. | LIST |
|----------|---------------------------------------|-------|
| 15 | HL-31 (MED 5002-25) | 22.95 |
| 15 | HL-32 (MED 5002-50) | 37.95 |
| 15 | HL-35 (MED 5003-15) | 22.95 |
| 15 | HL-36 (MED 5003-25) | 32.95 |
| 15 | HL-37 (MED 5003-50) | 57.95 |
| 15 | HL-50 | 29.95 |
| 15 | HL-100 | 39.95 |
| 15 | X-10, ft. | .25 |
| 15 | X-11, 100 ft. | 22.50 |
| 15 | X-12, 50 ft. | 13.50 |
| 15 | X-13, 25 ft. | 8.75 |
| 15 | X-14, 40 ft. | 11.50 |
| 15 | X-15, 250 ft. coil | 49.50 |
| 15 | X-20, ft. | .22 |
| 15 | X-21, 100 ft. | 15.50 |
| 15 | X-22, 250 ft. coil | 39.50 |
| 15 | X-24, 40 ft. | 8.75 |
| 15 | X-40, ft. | .16 |
| 15 | X-41, 100 ft. | 12.50 |
| 15 | X-42, 250 ft. roll | 30.95 |
| 15 | X-44, 40 ft. | 6.50 |
| 15 | X-103, per foot | .48 |
| 15 | X-123, per foot | .32 |
| 16 | EC-1202, $\frac{3}{4}$ "—100 ft. roll | 4.50 |
| 16 | EC-1202, $\frac{3}{4}$ "—ctn. | |
| 16 | EC-1202, 1"—100 ft. roll | 5.58 |
| 16 | EC-1202, 1"—ctn. | |
| 16 | EC-1279, 30" length—each | .95 |
| 16 | EC-1279—ctn. | |
| 16 | G-81, 60 ft. roll | .89 |
| 16 | MM-40, 60 yd. roll | 1.25 |
| 16 | MM-50, 20 ft. roll | .75 |
| 16 | MM-51, 66 ft. roll | 1.95 |
| 17 | H-116 | 3.50 |
| 17 | H-117 | 3.25 |
| 17 | H-119 | 2.75 |
| 17 | H-120 | 2.34 |
| 17 | H-126 | 9.75 |
| 17 | H-127 | 12.50 |
| 17 | H-144 | 1.25 |
| 17 | H-145 | 1.10 |
| 17 | H-148 | 3.25 |
| 17 | H-149 | .39 |
| 17 | H-153 | 1.25 |
| 17 | H-154 | 1.10 |
| 17 | H-155 | 3.95 |
| 17 | H-160 | 2.95 |
| 17 | H-161 | .85 |
| 17 | H-171 | 3.25 |
| 17 | H-173 | 3.50 |

| Page No. | STOCK NO. | LIST |
|----------|----------------------|-------|
| 17 | H-175 | 3.25 |
| 17 | H-177 | 4.25 |
| 17 | H-180 | 3.25 |
| 17 | H-181 | 3.75 |
| 17 | H-185 | 17.25 |
| 17 | H-186 | 2.75 |
| 17 | HL-130 | .60 |
| 17 | HL-135 | .70 |
| 17 | HT-3 | 10.95 |
| 17 | HT-4 | 1.75 |
| 17 | HT-7 | 1.10 |
| 17 | HT-8 (No. 8), each | .60 |
| 17 | HT-10 (No. 10), each | .50 |
| 17 | S-30 | .70 |
| 17 | S-40 | .17 |
| 17 | S-51 | .15 |
| 17 | S-135 | 15 |
| 17 | S-136 | 22 |
| 18 | K-81 | 1.54 |
| 18 | K-83 | .09 |
| 18 | K-84 | .55 |
| 18 | K-85 | .55 |
| 18 | K-86 | 1.10 |
| 18 | N-75 | .17 |
| 18 | N-76 | .43 |
| 18 | N-77 | .51 |
| 18 | N-78 | .51 |
| 18 | N-79 | .49 |
| 18 | N-80 | .49 |
| 18 | N-81 | .46 |
| 18 | N-82 | .39 |
| 18 | N-83 | .46 |
| 18 | N-84 | .43 |
| 18 | N-85 | .18 |
| 18 | N-86 | .22 |
| 18 | N-87 | .22 |
| 18 | N-88 | .49 |
| 18 | N-90 | .52 |
| 18 | N-91 | .52 |
| 18 | N-92 | .52 |
| 18 | Z-2 | 3.37 |
| 18 | Z-3 | 2.25 |
| 18 | Z-7 | 1.50 |
| 18 | Z-11 | 4.12 |
| 18 | Z-15 | 3.94 |
| 18 | Z-16, ft. | .14 |

Prices are based on those prevailing at time of shipment.

| Page No. | STOCK NO. | LIST | Page No. | STOCK NO. | LIST | Page No. | STOCK NO. | LIST |
|----------|------------------------|------|----------|---------------------|-------|----------|-----------|--------|
| 18 | Z-18 | .12 | 20 | B-6 (216) | 1.84 | 22 | U-5430 | 35.20 |
| 18 | Z-19 | .12 | 20 | B-7 | .28 | 22 | U-6024 | 32.50 |
| 18 | Z-20 | 5.06 | 20 | B-8 | .50 | 22 | U-6030 | 37.40 |
| 18 | Z-21 | 3.93 | 20 | B-9 | .60 | 22 | U-6624 | 34.10 |
| 18 | Z-24 | .35 | 20 | B-10 | .60 | 22 | U-6630 | 39.60 |
| 18 | Z-25 | .45 | 20 | B-11 (218) | 1.84 | 22 | U-7224 | 36.25 |
| 18 | Z-26 | 1.97 | 20 | B-12 | .05 | 22 | U-7230 | 41.80 |
| 18 | Z-27 | .12 | 20 | B-26 (503-C), 12 V. | 3.62 | 22 | U-7824 | 37.95 |
| 18 | Z-28 | 2.25 | 20 | B-27 (500P), 12 V. | 3.02 | 22 | U-7830 | 44.00 |
| 18 | Z-29 | .12 | 20 | B-30 (326-S) | .48 | 22 | U-8424 | 39.95 |
| 18 | Z-30 | 2.81 | 20 | B-31 (500-P), 6 V. | 3.00 | 22 | U-8430 | 46.25 |
| 18 | Z-31 | .12 | 20 | B-35 (500-11) | .50 | 22 | U-9024 | 41.95 |
| 18 | Z-32 | 3.65 | 20 | B-38 (360) | 1.60 | 22 | U-9030 | 48.50 |
| 18 | Z-34 | 4.22 | 20 | B-39 (503-C), 6 V. | 3.60 | 22 | U-9624 | 43.75 |
| 18 | Z-38 | 3.94 | 20 | B-40 (100) | .56 | 22 | U-9630 | 50.95 |
| 18 | Z-40 | 4.26 | 20 | B-49 (173-C) | 2.40 | 22 | U-10224 | 45.75 |
| 19 | BG-1 (A9710) | .38 | 20 | B-93 (223) | 1.50 | 22 | U-10230 | 53.25 |
| 19 | BG-2 (A9715) | .66 | 20 | B-94 (223-0) | 1.80 | 22 | U-10824 | 47.95 |
| 19 | D-30 (1040-B) | 7.50 | 20 | B-95 (230 VP) | 2.44 | 22 | U-10830 | 55.00 |
| 19 | D-31 (1040-B) | 7.50 | 20 | B-97 (200) | 3.96 | 22 | U-11424 | 49.50 |
| 19 | D-32 (1040-B) | 7.50 | 20 | B-98 (204) | 3.60 | 22 | U-11430 | 57.25 |
| 19 | D-35 | 1.20 | 20 | B-99 (202) | 3.16 | 22 | U-12024 | 51.50 |
| 19 | D-36 | .75 | 20 | BP-22 (22) | 3.30 | 22 | U-12030 | 59.50 |
| 19 | D-37 | 1.85 | 20 | BP-23 (23) | 2.70 | 22 | U-12624 | 53.50 |
| 19 | D-38 | .50 | 20 | BP-32 (230-VP-1) | 1.10 | 22 | U-12630 | 61.75 |
| 19 | D-39 | .25 | 20 | BP-33 (230-VP-2) | 1.58 | 22 | U-13224 | 55.50 |
| 19 | D-40, each | .30 | 20 | BP-111 (111-DH) | 3.75 | 22 | U-13230 | 63.95 |
| 19 | D-41 | .05 | 20 | BP-112 (111-DH) | 3.75 | 22 | U-13824 | 57.50 |
| 19 | D-42 | .10 | 20 | BP-197 (200-3) | .60 | 22 | U-13830 | 66.00 |
| 19 | D-43, pair | .10 | 20 | BP-275 (L-77) | 10.00 | 22 | U-14424 | 59.25 |
| 19 | D-44 | .05 | 20 | BP-280 (SP-77) | .24 | 22 | U-14430 | 68.50 |
| 19 | D-45 | 3.40 | 21 | B-32 (S-20) | .20 | 22 | U-15024 | 61.25 |
| 19 | D-46 | 4.10 | 21 | B-33 (S-19) | .20 | 22 | U-15030 | 70.75 |
| 19 | D-48 (1040-DK), 1 1/2" | 8.50 | 21 | B-34 (B-17) | .32 | 22 | U-15624 | 63.00 |
| 19 | D-49 (1040-DK), 1 3/4" | 8.50 | 21 | B-37 (S60-A) | .16 | 22 | U-15630 | 72.75 |
| 19 | D-50 (1040-DK), 2" | 8.50 | 21 | B-41 (C-9) | 1.76 | 22 | UM-508 | 72.00 |
| 19 | D-52 (X-1) | 1.35 | 21 | B-42 (H-7) | 1.40 | 22 | UM-510 | 86.00 |
| 19 | D-53 | .16 | 21 | B-43 (R-10) | .60 | 22 | UM-512 | 97.00 |
| 19 | D-54 (X-10) | .12 | 21 | B-44 (H-85) | 2.96 | 22 | UM-514 | 107.00 |
| 19 | D-55 | 1.20 | 21 | B-45 (L-51) | 6.30 | 22 | UM-516 | 122.00 |
| 19 | D-56 | .95 | 21 | B-46 (L-50) | 6.30 | 22 | UM-518 | 133.00 |
| 19 | D-57 (X-9) | .25 | 21 | B-47 | 4.20 | 22 | UM-520 | 144.00 |
| 19 | D-60 (606) | 8.50 | 21 | B-48 | 4.20 | 22 | UM-522 | 155.00 |
| 19 | D-70 (555) | 2.00 | 21 | B-50 | .20 | 22 | UM-524 | 169.00 |
| 19 | D-72 (555) | 2.70 | 21 | B-51 (L-54) | 7.48 | 22 | UM-526 | 180.00 |
| 19 | F-1 | .70 | 21 | B-52 (L-55) | 7.48 | 22 | UM-528 | 191.00 |
| 19 | K-50 (2050) | 5.50 | 21 | B-53 (H-20) | 5.28 | 22 | UM-530 | 205.00 |
| 19 | K-51 (2038) | .60 | 21 | B-54 (C-10) | 1.76 | 22 | UM-532 | 217.00 |
| 19 | K-52 (2039) | .60 | 21 | B-55 (H-20-2) | 1.76 | 22 | UM-534 | 228.00 |
| 19 | K-53 (1204) | .45 | 21 | B-56 (H-20-2) | 2.00 | 22 | UM-536 | 239.00 |
| 19 | K-54 (3013) | .12 | 21 | B-58 (No. 2) | 11.94 | 22 | UM-608 | 78.00 |
| 19 | K-88 (28) | 3.50 | 21 | B-59 (No. 3) | 11.98 | 22 | UM-608 | 78.00 |
| 19 | K-89 (29) | 3.50 | 21 | B-63 (B-23) | .05 | 22 | UM-610 | 95.00 |
| 19 | K-90 (1203) | .30 | 21 | B-64 (C-18) | .38 | 22 | UM-612 | 108.00 |
| 19 | K-94 | 6.05 | 21 | B-205 (C-14L) | .40 | 22 | UM-614 | 121.00 |
| 19 | K-95 | 6.60 | 21 | B-306 (L-60) | 7.90 | 22 | UM-616 | 138.00 |
| 19 | V-14 | 9.50 | 21 | B-307 | 8.06 | 22 | UM-618 | 151.00 |
| 19 | V-15 | 4.25 | 21 | B-310 (L-66-2) | 1.65 | 22 | UM-620 | 164.00 |
| 19 | V-16 | 1.25 | 21 | B-311 (BPL-66-2) | .88 | 22 | UM-622 | 177.00 |
| 19 | V-17 | 4.50 | 21 | B-312 (L-66-6) | .56 | 22 | UM-624 | 194.00 |
| 20 | B-4 (162-0) | 1.72 | 21 | B-313 (L-66-3) | .34 | 22 | UM-626 | 207.00 |
| 20 | B-5 (163-0) | 1.98 | 21 | B-314 (L-66-15) | .56 | 22 | UM-628 | 220.00 |
| | | | 21 | B-315 (BPL-66-1) | 1.10 | 22 | UM-630 | 237.00 |
| | | | 21 | B-316 (L-66-1) | 1.65 | 22 | UM-632 | 250.00 |
| | | | 21 | B-317 (L-66-14) | 1.76 | 22 | UM-634 | 263.00 |
| | | | 21 | B-318 (BPL-66-7) | .34 | 22 | UM-636 | 276.00 |
| | | | 21 | B-319 (L-66-9) | .34 | 22 | UM-708 | 83.00 |
| | | | 21 | B-320 (L-66-8) | .12 | 22 | UM-710 | 101.00 |
| | | | 21 | B-321 (L-66-10) | .12 | 22 | UM-712 | 116.00 |
| | | | 21 | B-322, doz. | .25 | 22 | UM-714 | 141.00 |
| | | | 21 | BP-66 (SP-66) | .16 | 22 | UM-716 | 158.00 |
| | | | 22 | U-702 | 3.25 | 22 | UM-718 | 173.00 |
| | | | 22 | U-703 | 8.50 | 22 | UM-720 | 187.00 |
| | | | 22 | U-704 | 9.50 | 22 | UM-722 | 201.00 |
| | | | 22 | U-705 | 10.75 | 22 | UM-724 | 219.00 |
| | | | 22 | U-706 | 12.00 | 22 | UM-726 | 233.00 |
| | | | 22 | U-1824 | 18.70 | 22 | UM-728 | 248.00 |
| | | | 22 | U-1830 | 22.00 | 22 | UM-730 | 266.00 |
| | | | 22 | U-2424 | 20.65 | 22 | UM-732 | 279.00 |
| | | | 22 | U-2430 | 24.20 | 22 | UM-734 | 294.00 |
| | | | 22 | U-3024 | 22.55 | 22 | UM-736 | 308.00 |
| | | | 22 | U-3030 | 26.40 | 22 | UR-722 | 154.00 |
| | | | 22 | U-3624 | 24.50 | 22 | UR-724 | 169.00 |
| | | | 22 | U-3630 | 28.60 | 22 | UR-726 | 182.00 |
| | | | 22 | U-4224 | 26.40 | 22 | UR-728 | 195.00 |
| | | | 22 | U-4230 | 30.80 | 22 | UR-730 | 209.00 |
| | | | 22 | U-4824 | 28.50 | 22 | UR-732 | 222.00 |
| | | | 22 | U-4830 | 33.00 | 22 | UR-734 | 233.00 |
| | | | 22 | U-5424 | 30.25 | 22 | UR-736 | 244.00 |
| | | | | | | 22 | UR-738 | 259.00 |
| | | | | | | 22 | UR-740 | 270.00 |

Prices are based on those prevailing at time of shipment.

| Page No. | STOCK NO. | LIST |
|----------|---------------------|--------|
| 22 | UR-810 | 90.00 |
| 22 | UR-812 | 103.00 |
| 22 | UR-814 | 115.00 |
| 22 | UR-816 | 131.00 |
| 22 | UR-818 | 146.00 |
| 22 | UR-820 | 160.00 |
| 22 | UR-822 | 174.00 |
| 22 | UR-824 | 193.00 |
| 22 | UR-826 | 208.00 |
| 22 | UR-828 | 223.00 |
| 22 | UR-830 | 240.00 |
| 22 | UR-832 | 254.00 |
| 22 | UR-834 | 268.00 |
| 22 | UR-836 | 281.00 |
| 22 | UR-838 | 298.00 |
| 22 | UR-840 | 312.00 |
| 22 | UR-910 | 99.00 |
| 22 | UR-912 | 113.00 |
| 22 | UR-914 | 128.00 |
| 22 | UR-916 | 147.00 |
| 22 | UR-918 | 164.00 |
| 22 | UR-920 | 180.00 |
| 22 | UR-922 | 197.00 |
| 22 | UR-924 | 218.00 |
| 22 | UR-926 | 235.00 |
| 22 | UR-928 | 253.00 |
| 22 | UR-930 | 272.00 |
| 22 | UR-932 | 289.00 |
| 22 | UR-934 | 305.00 |
| 22 | UR-936 | 321.00 |
| 22 | UR-938 | 340.00 |
| 22 | UR-940 | 356.00 |
| 22 | UR-942 | 371.00 |
| 22 | UR-944 | 390.00 |
| 22 | UR-1010 | 108.00 |
| 22 | UR-1012 | 125.00 |
| 22 | UR-1014 | 142.00 |
| 22 | UR-1016 | 163.00 |
| 22 | UR-1018 | 182.00 |
| 22 | UR-1020 | 201.00 |
| 22 | UR-1022 | 220.00 |
| 22 | UR-1024 | 243.00 |
| 22 | UR-1026 | 263.00 |
| 22 | UR-1028 | 283.00 |
| 22 | UR-1030 | 305.00 |
| 22 | UR-1032 | 324.00 |
| 22 | UR-1034 | 342.00 |
| 22 | UR-1036 | 360.00 |
| 22 | UR-1038 | 381.00 |
| 22 | UR-1040 | 399.00 |
| 22 | UR-1042 | 417.00 |
| 22 | UR-1044 | 439.00 |
| 23 | BA-10 | 3.30 |
| 23 | BA-12 | 3.96 |
| 23 | BA-14 | 4.62 |
| 23 | BA-16 | 5.28 |
| 23 | BA-18 | 5.94 |
| 23 | BA-20 | 6.60 |
| 23 | BA-24, yd. | 5.00 |
| 23 | BA-25, yd. | 4.00 |
| 23 | BA-26 | 3.14 |
| 23 | BA-27 | .35 |
| 23 | BA-28 | .39 |
| 23 | BA-29 | .77 |
| 23 | BA-30 | 2.15 |
| 23 | BA-32 | .11 |
| 23 | BA-33 | .45 |
| 23 | BA-34 | .54 |
| 23 | BA-40, ft. | .06 |
| 23 | BA-41, doz. | .20 |
| 23 | BA-50, gal. | 2.80 |
| 23 | BA-51, Qt. | 1.25 |
| 23 | BA-62, 100 ft. roll | 4.25 |
| 23 | BA-64, gross | 1.62 |
| 23 | BA-810 | 42.65 |
| 23 | BA-812 | 53.05 |
| 23 | BA-814 | 59.90 |
| 23 | BA-816 | 66.90 |
| 23 | BA-818 | 77.15 |
| 23 | BA-820 | 77.65 |
| 23 | BA-912 | 56.40 |
| 23 | BA-914 | 64.10 |

| Page No. | STOCK NO. | LIST |
|----------|---------------------|--------|
| 23 | BA-916 | 71.75 |
| 23 | BA-918 | 82.80 |
| 23 | BA-920 | 83.35 |
| 23 | BA-922 | 94.40 |
| 23 | BA-924 | 102.05 |
| 23 | BA-926 | 109.70 |
| 23 | BA-928 | 120.80 |
| 23 | BA-930 | 121.30 |
| 23 | BA-932 | 128.75 |
| 23 | BA-934 | 138.85 |
| 23 | BA-936 | 147.50 |
| 23 | BA-938 | 155.15 |
| 23 | BA-940 | 159.10 |
| 23 | BA-1012 | 60.60 |
| 23 | BA-1014 | 68.90 |
| 23 | BA-1016 | 77.20 |
| 23 | BA-1018 | 88.90 |
| 23 | BA-1020 | 89.45 |
| 23 | BA-1022 | 101.35 |
| 23 | BA-1024 | 109.60 |
| 23 | BA-1026 | 117.90 |
| 23 | BA-1028 | 129.60 |
| 23 | BA-1030 | 130.15 |
| 23 | BA-1032 | 138.65 |
| 23 | BA-1034 | 150.35 |
| 23 | BA-1036 | 158.60 |
| 23 | BA-1038 | 166.90 |
| 23 | BA-1040 | 170.85 |
| 23 | BS-810 | 59.85 |
| 23 | BS-812 | 76.00 |
| 23 | BS-814 | 82.85 |
| 23 | BS-816 | 89.90 |
| 23 | BS-818 | 105.85 |
| 23 | BS-820 | 106.35 |
| 23 | BS-822 | 122.35 |
| 23 | BS-824 | 129.35 |
| 23 | BS-826 | 136.20 |
| 23 | BS-828 | 152.35 |
| 23 | BS-912 | 79.80 |
| 23 | BS-914 | 87.45 |
| 23 | BS-916 | 95.15 |
| 23 | BS-918 | 111.95 |
| 23 | BS-920 | 112.45 |
| 23 | BS-922 | 129.25 |
| 23 | BS-924 | 135.25 |
| 23 | BS-926 | 144.60 |
| 23 | BS-928 | 161.60 |
| 23 | BS-930 | 162.10 |
| 23 | BS-932 | 169.60 |
| 23 | BS-934 | 186.40 |
| 23 | BS-936 | 194.05 |
| 23 | BS-938 | 201.70 |
| 23 | BS-940 | 211.35 |
| 23 | BS-1012 | 89.35 |
| 23 | BS-1014 | 97.85 |
| 23 | BS-1016 | 106.10 |
| 23 | BS-1018 | 124.65 |
| 23 | BS-1020 | 125.15 |
| 23 | BS-1022 | 144.15 |
| 23 | BS-1024 | 152.65 |
| 23 | BS-1026 | 160.90 |
| 23 | BS-1028 | 179.90 |
| 23 | BS-1030 | 180.40 |
| 23 | BS-1032 | 188.90 |
| 23 | BS-1034 | 207.45 |
| 23 | BS-1036 | 215.95 |
| 23 | BS-1038 | 224.20 |
| 23 | BS-1040 | 233.95 |
| 23 | E-120, pt. | .80 |
| 23 | E-121, qt. | 1.25 |
| 23 | E-122, gal. | 3.75 |
| 23 | E-123, 5 gal. | 17.50 |
| 23 | E-130, 150 ft. roll | 9.75 |
| 23 | E-131, ft. | .10 |
| 23 | E-132, 150 ft. roll | 17.50 |
| 23 | E-133, ft. | .15 |
| 23 | F-5 | .75 |
| 23 | SW-1, gal. | 2.55 |
| 24 | AG-25 | 5.00 |
| 24 | CB-1 | 32.75 |
| 24 | F-10 | 6.50 |
| 24 | L-1 | 11.95 |
| 24 | L-3 | 17.95 |
| 24 | N-1 (2S) | 18.80 |

| Page No. | STOCK NO. | LIST |
|----------|---------------------|--------|
| 24 | N-2 (2SR) | 24.00 |
| 24 | N-3 (1SP) | 26.00 |
| 24 | N-4 (1SPR) | 33.00 |
| 24 | N-5 (D1SPR) | 45.80 |
| 24 | N-6 (3S) | 25.80 |
| 24 | N-7 (3SR) | 33.30 |
| 24 | N-8 (2SP) | 35.90 |
| 24 | N-9 (2SPR) | 44.70 |
| 24 | N-10 (D2SPR) | 67.90 |
| 24 | P-40 | 21.50 |
| 24 | P-41 | 24.75 |
| 24 | P-42 | 32.95 |
| 24 | SG-1 | 3.25 |
| 24 | SG-2 | 3.25 |
| 25 | A-60 | 3.85 |
| 25 | A-61 | 4.18 |
| 25 | A-62 | 4.40 |
| 25 | A-63 | 5.28 |
| 25 | A-64 | 5.39 |
| 25 | A-65 | 5.61 |
| 25 | A-66 | 5.83 |
| 25 | A-67 | 6.60 |
| 25 | A-68 | 7.26 |
| 25 | A-88, pr. | .40 |
| 25 | A-90, yd. | .08 |
| 25 | A-93, 1000 yd. roll | — |
| 25 | A-95, yd. | .40 |
| 25 | A-96, 72 yd. roll | — |
| 25 | A-98, yd. | .45 |
| 25 | A-99, 72 yd. roll | — |
| 25 | CC-12, pr. | .39 |
| 25 | CMH-12 | 4.90 |
| 25 | F-40 | 6.50 |
| 25 | ME-1 ("55") | 126.95 |
| 25 | ME-5 ("Jet") | 120.95 |
| 25 | NT-1 | 4.95 |
| 25 | NT-2 | .65 |
| 25 | Z-50 | 1.00 |
| 26 | SS-100 (170) | 16.90 |
| 26 | SS-101 (120) | 10.70 |
| 26 | SS-102 | 1.50 |
| 26 | SS-103 | 2.10 |
| 26 | SS-104 | 1.50 |
| 26 | SS-105 | .50 |
| 26 | SS-106 (148) | 23.50 |
| 26 | SS-107 (151-O) | 7.00 |
| 26 | SS-108 (151-S) | 14.25 |
| 26 | SS-109 (151-L) | 17.50 |
| 26 | SS-120 | 10.50 |
| 26 | SS-121 | 3.80 |
| 26 | SS-122 | 2.40 |
| 26 | SS-123 | 7.95 |
| 26 | SS-124 (225) | 10.40 |
| 26 | SS-125 | 2.30 |
| 26 | SS-126 | 6.70 |

| Page No. | STOCK NO. | LIST | Page No. | STOCK NO. | LIST | Page No. | STOCK NO. | LIST |
|----------|----------------|-------|----------|----------------|-------|----------|-----------------|-------|
| 26 | SS-127 | 1.60 | 28 | W-9 (203-B) | .34 | 29 | WM-16 (M-1731) | 14.37 |
| 26 | SS-130 (427) | 15.80 | 28 | W-10 (203) | 4.00 | 30 | W-25 (K1013R) | 10.02 |
| 26 | SS-131 | 1.00 | 28 | W-119 (401-A) | 1.22 | 30 | W-26 (K1017R) | 10.73 |
| 26 | SS-132 | 8.70 | 28 | W-120 (401-B) | .34 | 30 | W-27 (K1023R) | 12.14 |
| 26 | SS-133 | 1.20 | 28 | W-126 (1001) | 6.98 | 30 | W-28 (K1031R) | 13.99 |
| 26 | SS-134 | 7.50 | 28 | W-127 (1001-C) | 2.76 | 30 | W-29 (K1723R) | 14.66 |
| 26 | SS-138 | .75 | 28 | W-128 (1001-A) | 2.73 | 30 | W-30 (K1731R) | 17.24 |
| 26 | SS-139 | 2.00 | 28 | W-129 (1001-B) | 1.47 | 30 | W-31 (K1743R) | 23.52 |
| 26 | SS-160 (127) | 15.50 | 28 | W-197 (M-14) | .24 | 30 | W-32 (165165C) | 5.82 |
| 26 | SS-161 | 3.80 | 28 | W-198 (M-18) | .11 | 30 | W-32F (165165F) | 7.22 |
| 26 | SS-165 (128) | 16.00 | 28 | W-199 (M-17) | .09 | 30 | W-33 (125185C) | 6.28 |
| 26 | SS-170 (129) | 12.80 | 28 | WP-1 (415) | 8.64 | 30 | W-33F (125185F) | 7.48 |
| 26 | SS-199 | 1.10 | 28 | WP-2 (415-S) | 1.89 | 30 | W-34 (1600C) | 6.51 |
| 27 | SS-110 (220) | 16.80 | 28 | WP-3 (415-P) | 1.26 | 30 | W-34F (1600F) | 7.50 |
| 27 | SS-111 | 7.00 | 28 | WP-4 | 1.01 | 30 | W-35 (165225C) | 7.10 |
| 27 | SS-112 | 6.72 | 28 | WP-5 (415-A) | .49 | 30 | W-35F (165225F) | 8.93 |
| 27 | SS-113 | .80 | 28 | WP-6 (MXL) | 18.65 | 30 | W-36 (700D) | .11 |
| 27 | SS-114 | 2.10 | 28 | WP-7 (MX) | 17.81 | 30 | W-37 (700F) | .32 |
| 27 | SS-115 (80) | 1.20 | 28 | WP-8 (415-H) | 5.42 | 30 | W-38 (700G) | .57 |
| 27 | SS-117 (66DH) | 2.80 | 28 | WP-9 (415-MXL) | 27.83 | 30 | W-39 (700-GA) | .30 |
| 27 | SS-118 (66) | 6.10 | 28 | WP-10 (1471) | 10.95 | 30 | W-40 (700-H) | .15 |
| 27 | SS-150 (227) | 19.50 | 29 | W-14 (122-AS) | 1.68 | 30 | W-41 (700-L) | .34 |
| 27 | SS-151 | 7.00 | 29 | W-42 (122-1) | 11.28 | 30 | W-44 (5017-S) | 6.62 |
| 27 | SS-152 | 10.95 | 29 | W-43 | 2.65 | 30 | W-190 (K-17) | 2.75 |
| 27 | SS-153 | .80 | 29 | W-130 (130) | 26.04 | 30 | W-191 (720-17) | 1.68 |
| 27 | SS-154 | 2.50 | 29 | W-131 (131) | 9.85 | 30 | W-192 (K-10) | 2.54 |
| 27 | SS-180 (51-T) | 1.10 | 29 | W-133 (130-F) | 2.59 | 30 | W-193 (720-10) | 1.68 |
| 27 | SS-182 (53-T) | 1.30 | 29 | W-134 (130-G) | 4.65 | 30 | W-194 (720-5) | 1.68 |
| 27 | SS-184 (53-G) | 1.30 | 29 | W-135 (406-T) | 18.82 | 30 | WP-28, foot | .08 |
| 27 | SS-186 (38) | 3.00 | 29 | W-136 (405-T) | 2.65 | 30 | WP-29 (700-F) | .26 |
| 27 | SS-189 (405) | .20 | 29 | W-137 (108-1) | 11.26 | 30 | WP-30 (700-G) | .49 |
| 27 | SS-210 (74) | 15.76 | 29 | W-138 | 2.65 | 30 | WP-31 (700-GA) | .26 |
| 27 | SS-212 (74 DH) | 2.80 | 29 | W-139 (122-A) | 1.68 | 30 | WP-141 (A) | 2.94 |
| 27 | SS-215 (75) | 19.08 | 29 | W-140 (108-A) | 1.68 | 30 | WP-142 (A) | 3.17 |
| 27 | SS-217 (75 DH) | 3.80 | 29 | W-141 (108-AS) | 1.68 | 30 | WP-143 (A) | 3.61 |
| 28 | CMH-10 | 1.40 | 29 | W-180 (440) | 21.32 | 30 | WP-144 (A) | 4.20 |
| 28 | M-29 | .85 | 29 | WM-1 (M-800C) | 2.35 | 30 | WP-145 (A) | 3.76 |
| 28 | W-1 (403-A) | .74 | 29 | WM-2 (M-800F) | 3.25 | 30 | WP-146 (A) | 4.22 |
| 28 | W-2 (403-A) | .74 | 29 | WM-5 (M-5010) | 5.65 | 30 | WP-147 (A) | 5.00 |
| 28 | W-3 (403) | 2.31 | 29 | WM-10 (M-1013) | 8.86 | 30 | WP-148 (A) | 7.22 |
| 28 | W-4 (403-B) | .32 | 29 | WM-11 (M-1017) | 9.56 | 30 | WP-149 (A) | 1.79 |
| 28 | W-5 (203-A) | 2.61 | 29 | WM-12 (M-1023) | 10.80 | 30 | WP-151 (B) | 5.52 |
| 28 | W-6 (203-A) | 2.61 | 29 | WM-13 (M-1031) | 12.52 | 30 | WP-152 (B) | 5.96 |
| 28 | W-7 (413) | 2.48 | 29 | WM-14 (M-1717) | 10.92 | 30 | WP-153 (B) | 6.66 |
| 28 | W-8 (203-C) | 1.29 | 29 | WM-15 (M-1723) | 12.29 | 30 | WP-154 (B) | 7.60 |

Prices are based on those prevailing at time of shipment.

| Page No. | STOCK NO. | LIST | Page No. | STOCK NO. | LIST | Page No. | STOCK NO. | LIST |
|----------|-------------|-------|----------|-------------|-------|----------|-----------|-------|
| 30 | WP-155 (B) | 6.74 | 30 | Y-76 | 1.68 | 31 | WJ-2317 | 21.13 |
| 30 | WP-156 (B) | 7.60 | 30 | Y-80 | 1.77 | 31 | WJ-2323 | 23.73 |
| 30 | WP-157 (B) | 8.95 | 30 | Y-84 | 1.85 | 31 | WJ-2331 | 28.33 |
| 30 | WP-158 (B) | 13.90 | 30 | Y-86 | 1.89 | 31 | WJ-2343 | 33.71 |
| 30 | WP-159 (B) | 3.38 | 30 | Y-88 | 1.94 | 31 | WJ-3117 | 23.71 |
| 30 | WP-161 (C) | 1.43 | 30 | Y-90 | 2.00 | 31 | WJ-3123 | 26.72 |
| 30 | WP-162 (C) | 1.62 | 30 | Y-91 | 2.02 | 31 | WJ-3131 | 31.65 |
| 30 | WP-163 (C) | 2.00 | 30 | Y-96 | 2.13 | 31 | WJ-3143 | 37.57 |
| 30 | WP-164 (C) | 2.65 | 30 | Y-102 | 2.25 | 31 | WJ-4317 | 28.02 |
| 30 | WP-165 (C) | 2.10 | 30 | Y-107 | 2.36 | 31 | WJ-4323 | 31.29 |
| 30 | WP-166 (C) | 2.48 | 30 | Y-111 | 2.46 | 31 | WJ-4331 | 36.82 |
| 30 | WP-167 (C) | 2.96 | 30 | Y-112 | 2.56 | 31 | WJ-4343 | 44.44 |
| 30 | WP-168 (C) | 3.70 | 30 | Y-118 | 2.61 | 31 | WP-1717 | 7.06 |
| 30 | WP-169 (C) | 1.37 | 30 | Y-123 | 2.71 | 31 | WP-1723 | 8.22 |
| 30 | WP-171 (SF) | 2.21 | 30 | Y-127 | 2.80 | 31 | WP-1731 | 9.85 |
| 30 | WP-172 (SF) | 2.37 | 30 | Y-130 | 2.88 | 31 | WP-1743 | 12.31 |
| 30 | WP-173 (SF) | 2.67 | 30 | Y-134 | 2.97 | 31 | WP-2317 | 8.22 |
| 30 | WP-174 (SF) | 3.26 | 30 | Y-138 | 3.05 | 31 | WP-2323 | 9.35 |
| 30 | WP-175 (SF) | 2.75 | 30 | Y-146 | 3.22 | 31 | WP-2331 | 11.09 |
| 30 | WP-176 (SF) | 3.09 | 30 | Y-154 | 3.41 | 31 | WP-2343 | 13.44 |
| 30 | WP-177 (SF) | 3.61 | 31 | W-16 | 74 | 31 | WP-3117 | 9.85 |
| 30 | WP-178 (SF) | 5.10 | 31 | WA-1717 | 15.31 | 31 | WP-3123 | 11.24 |
| 30 | WP-179 (SF) | 1.55 | 31 | WA-1723 | 16.74 | 31 | WP-3131 | 12.73 |
| 30 | Y-16 | .36 | 31 | WA-1731 | 18.69 | 31 | WP-3143 | 15.54 |
| 30 | Y-20 | .45 | 31 | WA-1743 | 23.21 | 31 | WP-4317 | 12.31 |
| 30 | Y-24 | .53 | 31 | WA-2317 | 16.74 | 31 | WP-4323 | 13.70 |
| 30 | Y-26 | .57 | 31 | WA-3117 | 18.69 | 31 | WP-4331 | 16.15 |
| 30 | Y-28 | .61 | 31 | WA-4317 | 23.21 | 31 | WP-4343 | 20.16 |
| 30 | Y-31 | .70 | 31 | WAP-1723 | 17.33 | 31 | WPA-1723 | 17.33 |
| 30 | Y-34 | .76 | 31 | WAP-1731 | 19.07 | 31 | WPA-1731 | 19.07 |
| 30 | Y-35 | .78 | 31 | WAP-1743 | 21.36 | 31 | WPA-1743 | 21.36 |
| 30 | Y-36 | .80 | 31 | WAP-2323 | 19.62 | 31 | WPA-2323 | 19.62 |
| 30 | Y-38 | .84 | 31 | WAP-2331 | 21.34 | 31 | WPA-2331 | 21.34 |
| 30 | Y-40 | .89 | 31 | WAP-2343 | 24.05 | 31 | WPA-2343 | 24.05 |
| 30 | Y-42 | .93 | 31 | WAP-3123 | 22.71 | 31 | WPA-3123 | 22.71 |
| 30 | Y-46 | 1.01 | 31 | WAP-3131 | 24.43 | 31 | WPA-3131 | 24.43 |
| 30 | Y-48 | 1.05 | 31 | WAP-3143 | 27.79 | 31 | WPA-3143 | 27.79 |
| 30 | Y-52 | 1.16 | 31 | WAP-4323 | 27.05 | 31 | WPA-4323 | 27.05 |
| 30 | Y-54 | 1.20 | 31 | WAP-4331 | 29.17 | 31 | WPA-4331 | 29.17 |
| 30 | Y-60 | 1.33 | 31 | WAP-4343 | 33.37 | 31 | WPA-4343 | 33.37 |
| 30 | Y-64 | 1.41 | 31 | WJ-1 (6791) | 2.35 | 32 | K-30 | 6.25 |
| 30 | Y-66 | 1.45 | 31 | WJ-1717 | 19.41 | 32 | K-31 | .75 |
| 30 | Y-70 | 1.56 | 31 | WJ-1723 | 21.89 | 32 | K-32 | 2.25 |
| 30 | Y-72 | 1.60 | 31 | WJ-1731 | 26.19 | 32 | L-11 | .30 |
| 30 | Y-74 | 1.64 | 31 | WJ-1743 | 31.36 | 32 | L-19 | .38 |
| | | | | | | 32 | L-25-M | .46 |
| | | | | | | 32 | L-32 | .52 |
| | | | | | | 32 | L-38 | .64 |
| | | | | | | 32 | L-43 | .64 |
| | | | | | | 32 | L-45 | .94 |

Prices are based on those prevailing at time of shipment.

| Page No. | STOCK NO. | LIST |
|----------|----------------|-------|
| 32 | L-50 | .98 |
| 32 | L-55 | 1.04 |
| 32 | L-60 | 1.08 |
| 32 | L-65 | 1.18 |
| 32 | L-70 | 1.24 |
| 32 | L-75 | 1.28 |
| 32 | L-85 | 1.44 |
| 32 | L-90 | 1.48 |
| 32 | L-100 | 1.66 |
| 32 | M-75 | 6.25 |
| 32 | M-76 | 5.70 |
| 32 | M-77 | 6.93 |
| 32 | M-79 | 5.76 |
| 32 | M-80 | 5.18 |
| 32 | M-81 | 6.48 |
| 32 | M-99 (W-577) | 1.40 |
| 32 | M-100 (W-576) | 1.40 |
| 32 | M-101 (W-629) | 1.50 |
| 32 | M-102 (W-690) | 2.95 |
| 32 | M-103 (XCK-10) | 2.00 |
| 32 | M-104 (XCK-18) | 2.50 |
| 32 | MH-1018 | 10.68 |
| 32 | MH-1024 | 11.70 |
| 32 | MH-1031 | 12.82 |
| 32 | MH-1042 | 17.22 |
| 32 | MH-1818 | 12.92 |
| 32 | MH-1824 | 14.06 |
| 32 | MH-1831 | 15.56 |
| 32 | MH-1842 | 19.94 |
| 32 | MHG-1018 | 1.32 |
| 32 | MHG-1024 | 1.38 |
| 32 | MHG-1031 | 1.50 |
| 32 | MHG-1042 | 1.94 |
| 32 | MHG-1818 | 1.84 |
| 32 | MHG-1824 | 1.90 |
| 32 | MHG-1831 | 1.98 |
| 32 | MHG-1842 | 2.14 |
| 32 | MJ-1818 | 16.98 |
| 32 | MJ-1824 | 17.92 |
| 32 | MJ-1831 | 19.78 |
| 32 | MJ-1842 | 23.56 |
| 32 | MJ-2118 | 17.48 |
| 32 | MJ-2124 | 19.32 |
| 32 | MJ-2131 | 21.38 |
| 32 | MJ-2142 | 25.56 |
| 32 | MJ-2418 | 18.88 |
| 32 | MJ-2424 | 21.12 |
| 32 | MJ-2431 | 23.28 |
| 32 | MJ-2442 | 27.96 |
| 32 | MJ-3118 | 21.58 |
| 32 | MJ-3124 | 24.54 |
| 32 | MJ-3131 | 27.64 |
| 32 | MJ-3142 | 32.24 |
| 32 | MJ-4218 | 26.30 |
| 32 | MJ-4224 | 29.78 |
| 32 | MJ-4231 | 33.48 |
| 32 | MJ-4242 | 39.24 |
| 32 | MJG-1818 | 1.82 |
| 32 | MJG-1824 | 1.98 |
| 32 | MJG-1831 | 2.10 |
| 32 | MJG-1842 | 2.32 |
| 32 | MJG-2118 | 1.88 |
| 32 | MJG-2124 | 2.04 |
| 32 | MJG-2131 | 2.14 |
| 32 | MJG-2142 | 2.36 |
| 32 | MJG-2418 | 1.98 |
| 32 | MJG-2424 | 2.14 |
| 32 | MJG-2431 | 2.24 |
| 32 | MJG-2442 | 2.44 |
| 32 | MJG-3118 | 2.10 |
| 32 | MJG-3124 | 2.24 |
| 32 | MJG-3131 | 2.32 |
| 32 | MJG-3142 | 2.52 |
| 32 | MJG-4218 | 2.32 |
| 32 | MJG-4224 | 2.44 |
| 32 | MJG-4231 | 2.52 |
| 32 | MJG-4242 | 2.76 |
| 32 | MP-2118 | 6.80 |
| 32 | MP-2124 | 7.70 |
| 32 | MP-2131 | 8.62 |
| 32 | MP-2142 | 10.48 |
| 32 | MP-3118 | 8.24 |
| 32 | MP-3124 | 9.34 |
| 32 | MP-3131 | 10.46 |
| 32 | MP-3142 | 12.54 |
| 32 | MP-4242 | 14.66 |
| 32 | MPG-2118 | 1.90 |
| 32 | MPG-2124 | 1.94 |
| 32 | MPG-2131 | 2.04 |
| 32 | MPG-2142 | 2.30 |

| Page No. | STOCK NO. | LIST |
|----------|-------------------|--------|
| 32 | MPG-3118 | 1.98 |
| 32 | MPG-3124 | 2.12 |
| 32 | MPG-3131 | 2.28 |
| 32 | MPG-3142 | 2.50 |
| 32 | MPG-4242 | 2.92 |
| 32 | MV-518 | 7.74 |
| 32 | MV-520 (W-639) | 1.50 |
| 33 | LG-2 (G-55) | 146.50 |
| 33 | LG-3 (E-55) | 127.50 |
| 33 | LG-4 (55EB) | 127.50 |
| 33 | LG-20 (G400) | 139.95 |
| 33 | LG-22 (40E) | 129.95 |
| 33 | LG-23 (40EB) | 129.95 |
| 33 | LG-30 (75G) | 227.50 |
| 33 | LG-31 (75GB1) | 227.50 |
| 33 | LG-32 (75TA) | 171.50 |
| 33 | LG-33 (75EB) | 171.50 |
| 33 | M-82 | 177.65 |
| 33 | M-83 | 2.25 |
| 33 | M-84 | 2.50 |
| 33 | M-86 | 198.50 |
| 33 | S-1 (78-A) | 193.10 |
| 33 | S-2 (81-EB) | 213.95 |
| 33 | S-3 (81-F) | 244.70 |
| 33 | S-4 (102-E) | 241.30 |
| 33 | S-6 (56-A) | 183.25 |
| 33 | S-7 (Q-42-B) | 188.00 |
| 33 | S-9 | 1.95 |
| 34 | DT-1 (525) | 97.45 |
| 34 | DT-2 (115926) | 34.95 |
| 34 | DT-3 (530) | 152.95 |
| 34 | DT-4 (540) | 166.45 |
| 34 | DT-5 (525-PA) | 119.95 |
| 34 | DT-7 (551-SP) | 167.95 |
| 34 | DT-8 (551-SPEM) | 198.95 |
| 34 | DT-10 | 2.95 |
| 34 | DT-11 | 5.65 |
| 34 | DT-12 | 2.26 |
| 34 | DT-13 | 7.30 |
| 34 | DT-14 | 3.00 |
| 34 | DT-20 (105634) | 16.70 |
| 34 | DT-21 (105707) | 17.60 |
| 34 | DT-22 (105600) | 13.95 |
| 34 | DT-23 | 1.45 |
| 34 | DT-24 | 1.15 |
| 34 | DT-25 | 1.15 |
| 34 | DT-26 | .85 |
| 34 | DT-27 | 5.95 |
| 34 | DT-28 | 2.15 |
| 34 | DT-29 | .75 |
| 34 | DT-60 (900264) | 20.75 |
| 34 | DT-61 (105677) | 18.10 |
| 34 | DT-62 (105670) | 21.90 |
| 34 | DT-65 | 24.50 |
| 34 | DT-80 | 6.50 |
| 34 | DT-81 | 6.50 |
| 35 | BH-2 | 7.50 |
| 35 | BH-3 | 16.00 |
| 35 | BH-4 | 18.00 |
| 35 | CO-1 (610-A) | 104.89 |
| 35 | CO-2 (4001) | 104.89 |
| 35 | CO-3 (700) | 149.95 |
| 35 | CO-5 (701) | 159.95 |
| 35 | CO-6 (710) | 259.95 |
| 35 | CO-25 (867-2011) | 14.40 |
| 35 | CO-26 (610A-2261) | 15.18 |
| 35 | CO-27 (701-2261) | 16.20 |
| 35 | CO-28 (710-1751) | 29.70 |
| 35 | CO-36 (492-2121) | .48 |
| 35 | CO-37 (491-2051) | .54 |
| 35 | CO-38 (700A-2391) | 1.68 |
| 35 | CO-39 (492-210) | .30 |
| 35 | CO-40 (492-3021) | 1.08 |
| 35 | CO-41 (492-3041) | .66 |
| 35 | CO-42 (492A-3221) | 1.08 |
| 35 | CO-43 (299-8941) | 2.40 |
| 35 | CO-44 (700-1481) | 5.94 |
| 35 | CO-45 (299-8951) | 3.12 |
| 35 | CO-46 (700-1151) | 4.62 |
| 35 | CO-47 (700-5121) | 1.20 |
| 35 | CO-48 (700B4201) | 1.02 |
| 35 | CO-50 (610-1341) | .48 |
| 35 | DT-15 (1A-25) | 4.76 |
| 35 | DT-16 | 1.20 |
| 35 | E-22 (NAC41-37) | 18.50 |
| 35 | E-26 (18MS) | 16.75 |
| 35 | E-29 (400-696) | 18.95 |

| Page No. | STOCK NO. | LIST |
|----------|------------------|-------|
| 35 | PR-50 (F-12) | 69.50 |
| 35 | PR-51 (F-18) | 76.95 |
| 35 | SF-1 | 3.75 |
| 35 | X-4 | 4.95 |
| 36 | AP-1 (252D) | 15.95 |
| 36 | AP-2 (252D) | 15.95 |
| 36 | AP-3 (252D) | 15.95 |
| 36 | AP-4 (252D) | 15.95 |
| 36 | AP-5 (252D) | 15.95 |
| 36 | AP-6 (252D) | 15.95 |
| 36 | AP-7 (252D) | 15.95 |
| 36 | AP-8 (252D) | 15.95 |
| 36 | AP-10 | .05 |
| 36 | AP-11 | .30 |
| 36 | AP-12 | .85 |
| 36 | AP-13 | 1.90 |
| 36 | AP-14 | 2.05 |
| 36 | AP-15 | .05 |
| 36 | AP-16 | 1.00 |
| 36 | AP-17 | .05 |
| 36 | AP-18 | 2.65 |
| 36 | AP-19 | .05 |
| 36 | AP-20 | .45 |
| 36 | AP-30 (356-11) | 43.10 |
| 36 | AP-31 (356-12) | 44.10 |
| 36 | AP-40 (K252EA) | 28.20 |
| 36 | AP-41 (K252EA) | 28.20 |
| 36 | AP-42 (88F-6) | 13.40 |
| 36 | AP-43 (49364) | 5.30 |
| 36 | AP-44 (49364P) | 5.30 |
| 36 | AP-45 (252EA) | 9.50 |
| 36 | AP-46 | 1.65 |
| 36 | AP-47 | 9.45 |
| 36 | AP-48 | 3.70 |
| 36 | AP-49 | .05 |
| 36 | AP-55 (22A) | 19.45 |
| 36 | AP-65 (119A) | 10.70 |
| 36 | AP-70 (2400) | 16.55 |
| 37 | CS-3 | 1.64 |
| 37 | CT-1 | .76 |
| 37 | CT-2 | .75 |
| 37 | DT-10 | 2.95 |
| 37 | DT-11 | 5.65 |
| 37 | DT-17, 3 oz. can | .49 |
| 37 | DT-18, 8 oz. can | 1.29 |
| 37 | E-15 | 20.30 |
| 37 | F-80 | 2.75 |
| 37 | RE-1 | 3.25 |
| 37 | RE-5 | 1.75 |
| 37 | RE-10 | 1.60 |
| 37 | TD-20, 42" | 10.95 |
| 37 | TD-21, 54" | 11.95 |
| 37 | TD-22, 72" | 13.95 |
| 37 | TD-25, 54" | 17.75 |
| 37 | TD-26, 72" | 18.75 |
| 37 | TD-30, set of 4 | 2.75 |

Prices are based on those prevailing at time of shipment.

| Page No. | STOCK NO. | LIST |
|----------|-----------|--------|
| 37 | WF-1 | 31.50 |
| 37 | WF-5 | 47.50 |
| 37 | WF-10 | 15.75 |
| 37 | WF-15 | 27.25 |
| 37 | X-1 | .98 |
| 38 | CC-100 | 15.75 |
| 38 | CC-101 | 6.50 |
| 38 | CC-102 | 21.60 |
| 38 | D-1 | 119.75 |
| 38 | D-3 | 89.95 |
| 38 | D-4 | 2.95 |
| 38 | D-5 | 2.25 |
| 38 | D-6 | 4.25 |
| 38 | D-7 | 17.95 |
| 38 | D-8 | .30 |
| 38 | D-9 | .60 |
| 38 | D-10 | 83.50 |
| 38 | D-11 | 94.75 |
| 38 | D-15 | 151.50 |
| 38 | P-209 | 91.50 |
| 38 | P-211 | 109.25 |
| 38 | P-212 | 150.00 |
| 39 | S-10 | .40 |

| | | |
|----|------|-----|
| 39 | S-11 | .53 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-13 | .45 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-14 | .55 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-16 | .50 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-18 | .55 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-20 | .28 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-21 | .20 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-30 | .70 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-31 | .72 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-34 | .85 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-35 | .90 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-39 | .12 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-40 | .17 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-41 | .25 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-50 | .12 |
|----|------|-----|

| Page No. | STOCK NO. | LIST |
|----------|-----------|------|
| 39 | S-51 | .15 |
| 39 | S-52 | .22 |
| 39 | S-56 | .23 |
| 39 | S-57 | .28 |
| 39 | S-59 | .33 |
| 39 | S-60 | .17 |
| 39 | S-61 | .19 |

| | | |
|----|------|-----|
| 39 | S-62 | .24 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-63 | .38 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-64 | .40 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-65 | .38 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-66 | .32 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-67 | .44 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-68 | .49 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-69 | .47 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-70 | .15 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-71 | .24 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-72 | .38 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-73 | .39 |
|----|------|-----|

| | | |
|----|------|-----|
| 39 | S-74 | .25 |
|----|------|-----|

| | | |
|----|------|------|
| 39 | S-75 | 1.38 |
|----|------|------|

| | | |
|----|------|-----|
| 39 | S-76 | .78 |
|----|------|-----|

| Page No. | STOCK NO. | LIST |
|----------|-----------|------|
| 39 | S-77 | .78 |
| 39 | S-78 | .33 |
| 39 | S-79 | .51 |
| 39 | S-80 | .70 |
| 39 | S-81 | .25 |
| 39 | S-82 | .38 |
| 39 | S-83 | .53 |
| 39 | S-88 | .40 |
| 39 | S-89 | .34 |
| 39 | S-90 | .50 |
| 39 | S-91 | .50 |
| 39 | S-92 | .58 |
| 39 | S-93 | .73 |
| 39 | S-94 | .55 |
| 39 | S-95 | 1.10 |
| 39 | S-96 | .62 |
| 39 | S-97 | .50 |
| 39 | S-98 | 1.70 |
| 39 | S-101 | .40 |
| 39 | S-105 | .36 |
| 39 | S-110 | 3.40 |
| 39 | S-111 | .10 |

| Page No. | STOCK NO. | LIST |
|----------|----------------|-------|
| 39 | S-112 | .12 |
| 39 | S-120 | 1.00 |
| 39 | S-121 | .55 |
| 39 | S-122 | .50 |
| 39 | S-125 | .60 |
| 39 | S-130 | .14 |
| 39 | S-135 | .15 |
| 39 | S-136 | .22 |
| 40 | F-50 (Y 200-1) | 2.85 |
| 40 | F-51 (Y200-5) | 3.50 |
| 40 | F-52 (Y200-8) | 6.25 |
| 40 | F-53 (924-10) | 10.50 |
| 40 | F-54 (1882) | 4.75 |
| 40 | F-55 (965-A) | 15.00 |
| 40 | F-56 (Y300-1) | .89 |
| 40 | F-57 (K880) | .95 |
| 40 | F-58 (M318) | .75 |
| 40 | F-62 (Y200-4) | 9.25 |
| 40 | F-65 (Y200-3) | 6.50 |
| 40 | F-66 (P-102) | .24 |
| 40 | R-77 (1421R) | 4.50 |
| 40 | R-80 (970U) | .85 |
| 40 | R-85 (1450R) | 1.38 |
| 40 | R-86 (5700S) | 1.33 |
| 40 | R-87 (2302P) | 5.95 |
| 40 | R-88 (2302A2) | 5.25 |
| 41 | CC-1 | 19.50 |

FOB FACTORY

41 CC-2 18.00

FOB FACTORY

41 CC-3 (A) sets 47.50
 41 CC-4 (B) sets 46.50
 41 CC-7 (C) sets 46.25
 41 CC-8 (D) sets 45.50

| Page No. | STOCK NO. | LIST |
|----------|--------------------|-------|
| 41 | R-81 (3103CO) | 4.95 |
| 41 | R-82 (3165F) | .88 |
| 41 | R-83 (3103C4) | 5.75 |
| 41 | S-45 | 3.95 |
| 41 | S-46 | 2.95 |
| 41 | S-47 | 1.75 |
| 41 | S-99 | .80 |
| 41 | T-1, foot | .30 |
| 41 | T-7, 50 ft. roll | 9.00 |
| 41 | T-2, foot | .29 |
| 41 | T-8, 60 ft. roll | 9.80 |
| 41 | T-3, foot | .40 |
| 41 | T-9, 50 ft. roll | 15.00 |
| 41 | T-55 | 3.75 |
| 41 | T-56 | 4.50 |
| 41 | TD-1 | 3.95 |
| 41 | TD-2 | 4.75 |
| 41 | TD-3 | .20 |
| 41 | TD-4 | .30 |
| 42 | AT-50, 50 ft. roll | 20.00 |
| 42 | AT-51, foot | .45 |
| 42 | AT-55, 50 ft. roll | 30.00 |
| 42 | AT-56, foot | .55 |
| 42 | BC-1 | .35 |
| 42 | BC-2 | .40 |
| 42 | BC-3 | .45 |
| 42 | M-310 | 1.50 |
| 42 | M-311 | 1.50 |
| 42 | M-312 | 1.50 |
| 42 | M-313 | 2.75 |
| 42 | M-314 | 1.50 |
| 42 | M-315 | 2.75 |
| 42 | M-316 | 1.50 |
| 42 | M-317 | 2.75 |
| 42 | M-318 | 1.50 |
| 42 | M-319 | 2.75 |
| 42 | M-320 | 2.25 |
| 42 | M-321 | 2.25 |
| 42 | M-325 | 6.95 |
| 42 | M-326 | .45 |
| 42 | M-330 | 7.95 |
| 42 | M-331 | .50 |
| 42 | MTS-1 | 6.95 |

42 SD-1 (2-3M) 1.95
 42 SD-2 (212-3M) 1.95
 42 SD-3 (3-3M) 1.95

| Page No. | STOCK NO. | LIST |
|----------|----------------------|-------|
| 42 | SD-5 (2-3F) | 1.95 |
| 42 | SD-6 (212-3F) | 1.95 |
| 42 | SD-7 (3-3F) | 1.95 |
| 42 | SD-10 (2-3ME) | 2.85 |
| 42 | SD-11 (212-3ME) | 2.85 |
| 42 | SD-12 (3-3ME) | 2.85 |
| 42 | SD-15 (2-3FE) | 2.95 |
| 42 | SD-16 (212-3FE) | 2.95 |
| 42 | SD-17 (3-3FE) | 2.95 |
| 42 | TD-31, length | 8.95 |
| 42 | TD-33 | 1.75 |
| 42 | TD-34 | 1.60 |
| 42 | TD-36 | 1.25 |
| 42 | TD-43 | 1.90 |
| 43 | MB-1 | 43.00 |
| 43 | MB-2 | 21.50 |
| 43 | MB-3 | 18.25 |
| 43 | MB-4 | 5.25 |
| 43 | MB-10 | .50 |
| 43 | MB-11 | 1.50 |
| 43 | MB-12 | 1.50 |
| 43 | MC-5 | 4.95 |
| 43 | MC-6 | 11.50 |
| 43 | MC-7 | 1.95 |
| 43 | MC-8 | 10.00 |
| 43 | MC-9 | 2.95 |
| 43 | N-50 | 1.50 |
| 43 | S-25 | 24.50 |
| 43 | WC-40 | .40 |
| 43 | WC-60 (1494) | 60.00 |
| 43 | WC-61 (1497) | 6.00 |
| 43 | WC-63 (14) | 1.00 |
| 43 | WC-64 (25) | 12.00 |
| 43 | WC-66 (20) | 16.50 |
| 43 | WC-67 (8) | 1.75 |
| 43 | WC-68 (7) | .50 |
| 43 | WC-69 (13) | 2.75 |
| 43 | WC-70 (16), set of 4 | 1.25 |
| 43 | WC-71 (18) | .85 |
| 43 | WC-72 (19), set of 4 | .56 |
| 43 | WC-73 (15) | 1.00 |
| 43 | WC-74 (22) | .86 |
| 43 | WC-75 (23) | 8.50 |
| 43 | WC-76 (24) | 8.80 |
| 43 | WC-77 (1) | 25.00 |
| 43 | WC-78 (10) | 1.00 |
| 43 | WC-79 (16), set of 4 | .95 |
| 43 | WC-80 (3) | 2.00 |
| 43 | WC-81 (4) | .60 |
| 43 | WC-82 (5) | 1.25 |
| 43 | WC-83 (11) | 1.00 |
| 43 | WC-84 (21) | 4.50 |
| 43 | WC-85 (9) | 1.25 |
| 43 | WC-86 | .20 |
| 43 | WC-87 (17) | .15 |
| 43 | WC-88 | .40 |
| 43 | WC-89 (2) | 4.00 |
| 43 | WC-90 (12) | .60 |
| 43 | WC-91 (6) | .56 |
| 43 | WC-92 | .70 |
| 43 | WC-93 | .05 |
| 43 | WC-94 | .20 |
| 43 | WC-97 | 2.50 |
| 43 | WC-98 | 3.75 |
| 43 | WC-99 | 6.50 |
| 44 | CJ-1 (30353) | 53.60 |
| 44 | CJ-2 (30331) | 27.44 |
| 44 | CJ-3 (30372) | 6.90 |
| 44 | CJ-4 (30329) | 26.00 |
| 44 | CJ-5 (30341) | 9.70 |
| 44 | CJ-8 (30346-4) | 4.20 |
| 44 | CJ-9 (30346-2) | 4.20 |
| 44 | CJ-20 (30330) | .50 |
| 44 | CJ-21 (30502) | 2.00 |

Prices are based on those prevailing at time of shipment.

| Page No. | STOCK NO. | LIST |
|----------|---------------|-------|
| 44 | CJ-22 (30501) | 1.60 |
| 44 | CJ-24 (30437) | 1.11 |
| 44 | CJ-25 (30438) | .18 |
| 44 | CJ-26 (30439) | .04 |
| 44 | CJ-27 (30440) | .06 |
| 44 | CJ-28 (30333) | .05 |
| 44 | CJ-29 (30334) | .05 |
| 44 | CJ-30 (30332) | .06 |
| 44 | CJ-31 (30441) | .06 |
| 44 | CJ-32 (30335) | .04 |
| 44 | CJ-33 (30340) | 5.30 |
| 44 | CJ-34 (30442) | 1.06 |
| 44 | CJ-35 (30443) | .28 |
| 44 | CJ-36 (30444) | .54 |
| 44 | CJ-37 (30445) | .28 |
| 44 | CJ-38 (30446) | .07 |
| 44 | CJ-39 (30447) | .56 |
| 44 | CJ-40 (30448) | .05 |
| 44 | CJ-41 (30449) | .22 |
| 44 | CJ-42 (30450) | .05 |
| 44 | CJ-43 (30451) | .05 |
| 44 | CJ-44 (30470) | .06 |
| 44 | CJ-45 (30471) | .06 |
| 44 | CJ-46 (30452) | .28 |
| 44 | CJ-47 (30453) | 1.60 |
| 44 | CJ-48 (30454) | .90 |
| 44 | CJ-49 (30455) | 6.90 |
| 44 | CJ-50 (30456) | .22 |
| 44 | CJ-51 (30457) | .22 |
| 44 | CJ-52 (30458) | 1.06 |
| 44 | CJ-53 (30459) | 5.30 |
| 44 | CJ-54 (30460) | 1.14 |
| 44 | CJ-55 (30461) | .12 |
| 44 | CJ-56 (30462) | 1.70 |
| 44 | CJ-57 (30463) | .36 |
| 44 | CJ-58 (30464) | 2.66 |
| 44 | CJ-59 (30465) | .64 |
| 44 | CJ-60 (30466) | .26 |
| 44 | CJ-61 (30467) | .12 |
| 44 | CJ-62 (30468) | .28 |
| 44 | CJ-63 (30469) | .56 |
| 44 | CJ-64 (30498) | 2.34 |
| 44 | CS-10 (30622) | 45.00 |
| 44 | CS-11 | 33.00 |
| 44 | CS-12 | 8.70 |
| 44 | CS-13 | 19.50 |
| 44 | CS-14 | 10.10 |
| 45 | 30165 | 69.80 |
| 45 | 30171 | 25.14 |
| 45 | 30181 | .11 |
| 45 | 30183 | .28 |
| 45 | 30185 | .10 |
| 45 | 30192 | .13 |
| 45 | 30193 | .04 |
| 45 | 30195 | .05 |
| 45 | 30200 | .05 |
| 45 | 30201 | .05 |
| 45 | 30202 | .05 |
| 45 | 30208 | .04 |
| 45 | 30210 | 9.16 |
| 45 | 30213A | 2.40 |
| 45 | 30217 | 9.56 |
| 45 | 30251 | .41 |
| 45 | 30255 | 2.30 |
| 45 | 30263 | 23.80 |
| 45 | 30267 | 10.30 |
| 45 | 30270 | .09 |
| 45 | 30276 | 8.20 |
| 45 | 30277 | .07 |
| 45 | 30280 | .06 |
| 45 | 30282 | 3.80 |
| 45 | 30285 | 2.00 |
| 45 | 30301 | .05 |
| 45 | 30308 | 18.80 |
| 45 | 30311 | .04 |
| 45 | 30316 | 43.20 |
| 45 | 30439 | .10 |
| 45 | 30572 | .50 |
| 45 | 30573 | .24 |
| 45 | 30574 | .16 |
| 45 | 30579 | 1.20 |
| 45 | 30583 | .10 |
| 45 | 30628A | .25 |
| 45 | 30630 | .40 |
| 45 | 30634 | .70 |
| 45 | 30665 | .84 |
| 45 | 30666 | 1.60 |
| 45 | 30667 | 2.50 |
| 45 | 30671 | .24 |

| Page No. | STOCK NO. | LIST |
|----------|---------------|-------|
| 45 | 30672 | .68 |
| 45 | 30677 | 1.44 |
| 45 | 30678 | 4.50 |
| 45 | C-1 (30578) | 76.00 |
| 45 | C-2 (30581) | 83.60 |
| 45 | C-5 (30658) | 4.00 |
| 45 | C-6 (30658-1) | 4.00 |
| 45 | C-9 (30619) | 16.80 |
| 45 | C-11 (30357) | 13.90 |
| 45 | CM-10 (30576) | 3.79 |
| 46 | CE-3 | 20.35 |
| 46 | CE-4 | 23.10 |
| 46 | CE-5 | 23.10 |
| 46 | CE-6 | 23.10 |
| 46 | CE-7 | 23.10 |
| 46 | CE-8 | 13.50 |
| 46 | CE-21 | 4.80 |
| 46 | CE-22 | 4.70 |
| 46 | CE-31 | 2.50 |
| 46 | CE-32 | 2.70 |
| 46 | CE-36 | 1.30 |
| 46 | CE-37 | 1.40 |
| 46 | CE-38 | 3.50 |
| 46 | CE-39 | 3.25 |
| 46 | CE-40 | 23.50 |
| 46 | CE-41 | 20.75 |
| 46 | CR-1 | 9.95 |
| 46 | CR-2 | 9.95 |
| 46 | CR-3 | 2.25 |
| 46 | H-140 | 4.50 |
| 46 | H-141 | 2.25 |
| 46 | L-22 | 11.95 |
| 46 | L-28 | 61.95 |
| 46 | M-200 | 7.86 |
| 46 | M-201 | 2.00 |
| 46 | M-202 | 25.25 |
| 46 | M-203 | 6.00 |
| 46 | M-204 | 6.50 |
| 46 | M-205 | 38.20 |
| 46 | T-76 | 17.75 |
| 46 | T-77 | 18.25 |
| 46 | T-78 | 19.00 |
| 47 | BN-10 | 4.25 |
| 47 | BN-11 | 4.25 |
| 47 | BN-15 | 4.25 |
| 47 | BT-1 | 5.00 |
| 47 | BT-10 | 4.50 |
| 47 | BT-12 | 4.50 |
| 47 | BT-14 | 4.50 |
| 47 | BT-18 | 6.75 |
| 47 | DT-50 | 52.95 |
| 47 | DT-51 | 9.50 |
| 47 | MN-10 | 4.50 |
| 47 | MN-12 | 6.25 |
| 47 | MN-15 | 3.95 |
| 47 | P-2 (123) | 45.50 |
| 47 | P-3 (126) | 46.50 |
| 47 | P-4 (136) | 46.50 |
| 47 | P-5 (210) | 55.55 |
| 47 | P-6 (212) | 58.65 |
| 47 | P-7 (320) | 74.50 |
| 47 | P-9 (312) | 61.00 |
| 47 | P-10 (412) | 77.00 |
| 47 | P-11 | 4.25 |
| 47 | P-12 | 4.95 |

| Page No. | STOCK NO. | LIST |
|----------|--------------------|-------|
| 47 | P-14 | 4.95 |
| 47 | P-16 | 4.95 |
| 47 | P-17 | 4.95 |
| 47 | P-19 | 4.25 |
| 47 | P-20 | 2.05 |
| 47 | PGL-2 (123) | 50.50 |
| 47 | PGL-3 (126) | 51.50 |
| 47 | PGL-4 (136) | 51.50 |
| 47 | PGL-5 (210) | 60.55 |
| 47 | PGL-6 (212) | 63.65 |
| 47 | PGL-7 (320) | 79.50 |
| 47 | PGL-9 (312) | 66.00 |
| 47 | PGL-10 (412) | 82.00 |
| 47 | SP-1 | 34.00 |
| 47 | SP-2 | 46.00 |
| 47 | SP-3 | 54.00 |
| 47 | SP-4 | 54.00 |
| 47 | SP-5 | 5.75 |
| 47 | SP-6 | 7.75 |
| 47 | SP-7 | 5.75 |
| 47 | SP-17 | 58.00 |
| 47 | SP-20 | 62.00 |
| 47 | SP-21 | 62.00 |
| 47 | SP-40 | 2.90 |
| 47 | SP-41 | .35 |
| 47 | WH-111 | .30 |
| 48 | B19 (C-05), length | .50 |
| 48 | B-21 (S40-B) | 6.00 |
| 48 | B-25 (444) | 15.68 |
| 48 | B-75 (S-41) | 9.90 |
| 48 | B-76 (S-41-M) | 3.90 |
| 48 | B-77 (S-42) | 18.66 |
| 48 | B-78 (S-42-M) | 6.50 |
| 48 | B-79 (S-42-C) | 2.20 |
| 48 | B-80 (S-83) | 3.60 |
| 48 | B-81 (S-80) | 4.22 |
| 48 | B-82 (S-80-2) | .44 |
| 48 | B-83 (S-80-3) | .10 |
| 48 | B-84 (S-80-1) | 1.68 |
| 48 | B-100 (SA-95) | .56 |
| 48 | B-101 (SA-95-1) | .44 |
| 48 | B-102 (S-80-7) | .20 |
| 48 | B-103 (S-80-4) | .05 |
| 48 | BP-10 (S-10) | 9.40 |
| 48 | BP-12 (S-11) | 13.40 |
| 48 | BP-13 (S-11-M) | 4.10 |
| 48 | BP-14 (S-12) | 23.90 |
| 48 | BP-15 (S-12-M) | 6.84 |
| 48 | BP-16 (S-12-C) | 2.20 |
| 48 | BP-85 (S-80-5) | .72 |
| 48 | BP-86 (S-80-6) | .30 |
| 48 | BP-87 (S-80-7) | .20 |
| 48 | BP-88 (S-80-8) | .05 |
| 48 | BP-89 (S-80-4) | .05 |
| 48 | CA-1 | 4.95 |
| 48 | M-300 | 4.95 |
| 49 | B-22 (S-73) | 2.04 |
| 49 | B-23 | .84 |
| 49 | B-24 (470) | 1.44 |
| 49 | B-23 (313-C) | 2.48 |
| 49 | B-29 (S-74) | 2.04 |
| 49 | B-104 (473) | 2.66 |
| 49 | B-106 (475) | 2.66 |
| 49 | B-108 (478) | 1.06 |
| 49 | B-118 (468) | .80 |
| 49 | B-119 (469) | .80 |
| 49 | CE-85 | 1.75 |
| 49 | CE-91 (S-845) | .28 |
| 49 | L-25 | 22.50 |
| 49 | M-206 | 17.88 |

Prices are based on those prevailing at time of shipment.

| Page No. | STOCK NO. | LIST |
|----------|---------------------|-------|
| 49 | M-207 | 18.98 |
| 49 | M-208 | 12.05 |
| 49 | M-209 | 12.93 |
| 49 | M-210 | 15.68 |
| 49 | M-211 | 11.28 |
| 49 | M-212 | 9.35 |
| 49 | M-213 | 3.95 |
| 49 | M-214 | 4.17 |
| 49 | M-220 | 1.75 |
| 49 | M-221 | 3.50 |
| 49 | M-222 | .20 |
| 49 | W-273 | .20 |
| 49 | WL-25 | 9.50 |
| 50 | E-90, quart | 1.79 |
| 50 | E-91, gallon | 5.95 |
| 50 | E-92, 2 gal. | 10.95 |
| 50 | E-93, 3 gal. | 16.50 |
| 50 | E-95, 5 gal. | 24.95 |
| 50 | E-100, tube | 1.00 |
| 50 | E-101 | 2.50 |
| 50 | E-103, 1/2 pt. | 1.00 |
| 50 | E-104, pint | 1.65 |
| 50 | E-105, quart | 2.50 |
| 50 | E-106, gallon | 8.25 |
| 50 | E-107 | 1.50 |
| 50 | E-109 | 1.75 |
| 50 | E-110, 2 oz. tube | .60 |
| 50 | E-111, 1 lb. tube | 1.95 |
| 50 | E-112, pint | 2.40 |
| 50 | E-113, quart | 3.15 |
| 50 | E-114, gallon | 9.40 |
| 50 | E-120, pint | .85 |
| 50 | E-121, quart | 1.25 |
| 50 | E-122, gallon | 3.75 |
| 50 | E-123, 5 gal. | 17.50 |
| 50 | E-130, 150 ft. roll | 9.75 |
| 50 | E-131, foot | .20 |
| 50 | E-132, 150 ft. roll | 17.50 |
| 50 | E-133, foot | .30 |
| 50 | E-140 | 1.79 |
| 50 | RL-1, 1 gal. | 4.75 |
| 50 | RL-2, 2 gal. | 9.50 |
| 50 | RL-3, 3 gal. | 14.25 |
| 50 | RL-5, 5 gal. | 23.75 |
| 50 | RL-55, 55 gal. | |
| 51 | BA-50, gal. | 2.80 |
| 51 | BA-51, qt. | 1.25 |
| 51 | E-50, 5 oz. | .90 |
| 51 | E-51, 5 oz. | 1.20 |
| 51 | E-52, 5 oz. | 1.20 |
| 51 | E-53, pt. | 2.50 |
| 51 | E-54, pt. | 2.50 |
| 51 | E-55, pt. | 1.95 |
| 51 | E-57, qt. | 3.25 |
| 51 | E-61, qt. | 4.50 |
| 51 | E-62, qt. | 4.50 |
| 51 | E-63, 1/2 gal. | 5.50 |
| 51 | E-64, 1/2 gal. | 7.50 |
| 51 | E-65, 1/2 gal. | 7.50 |
| 51 | E-67, gal. | 9.25 |
| 51 | E-68, gal. | 12.50 |
| 51 | E-69, gal. | 12.50 |

| Page No. | STOCK NO. | LIST |
|----------|----------------|-------|
| 51 | E-70 | 1.00 |
| 51 | E-75 | .75 |
| 51 | E-80 | .45 |
| 51 | E-81 | .46 |
| 51 | E-82 | .52 |
| 51 | E-83, quart | 1.00 |
| 51 | E-84, gallon | 3.85 |
| 51 | E-85, 5 gallon | 18.25 |
| 51 | I-1, 1/2 pt. | .65 |
| 51 | I-2, pint | 1.15 |
| 51 | I-3, quart | 2.05 |
| 51 | I-4, gallon | 7.00 |
| 51 | I-36, pint | .69 |
| 51 | I-37, quart | 1.25 |
| 51 | I-38, gal. | 4.10 |
| 51 | K-3, 1/2 pt. | 1.25 |
| 51 | K-4, pint | 1.90 |
| 51 | K-5, quart | 3.10 |
| 51 | K-6, gal. | 9.95 |
| 51 | K-8 | 1.85 |
| 51 | SW-1 | 2.55 |
| 52 | EZ-3 | 2.25 |
| 52 | EZ-6 | 2.95 |
| 52 | EZ-12 | 3.95 |
| 52 | EZ-18 | 4.95 |
| 52 | EZ-24 | 5.75 |
| 52 | EZ-30 (EZ-T) | 5.95 |
| 52 | EZ-31 (EZ-P) | .98 |
| 52 | EZ-32 (EZ-G) | .89 |
| 52 | EZ-A3 | 4.75 |
| 52 | EZ-A6 | 5.45 |
| 52 | EZ-A12 | 6.45 |
| 52 | EZ-A18 | 7.45 |
| 52 | EZ-A24 | 8.25 |
| 52 | EZ-B3 | 2.25 |
| 52 | EZ-B6 | 2.85 |
| 52 | EZ-B12 | 3.85 |
| 52 | EZ-B18 | 4.80 |
| 52 | EZ-B24 | 5.65 |
| 52 | EZ-C3 | 1.45 |
| 52 | EZ-C6 | 2.15 |
| 52 | EZ-C12 | 3.25 |
| 52 | EZ-C18 | 3.95 |

| Page No. | STOCK NO. | LIST |
|----------|------------------|--------|
| 52 | EZ-C24 | 4.85 |
| 52 | H-100 | 1.95 |
| 52 | H-101 | .80 |
| 52 | L-10 | 2.95 |
| 52 | LT-3 (LHT-3K) | 2.45 |
| 52 | LT-6 (LHT-6K) | 2.85 |
| 52 | LT-12 (LHT-12K) | 3.85 |
| 52 | LT-20 (LHT-20K) | 5.25 |
| 52 | LT-30 (LHT-30K) | 7.25 |
| 52 | LT-40 (WI-20) | .25 |
| 52 | LT-41 (GWI-25) | 1.00 |
| 52 | LT-46 (TSA-1035) | 6.95 |
| 52 | NF-1 (A-6) | 1.00 |
| 52 | NF-2 (B-12) | 1.80 |
| 52 | NF-3 (M-26) | 2.80 |
| 52 | NF-4 (P-40) | 2.80 |
| 52 | NF-5 (J-56) | 3.00 |
| 52 | NF-6 (S-112) | 6.00 |
| 52 | NF-7 (L-220) | 12.00 |
| 52 | NF-10 | 6.00 |
| 52 | NF-14 | 1.00 |
| 52 | NF-21 (T-3) | 2.35 |
| 52 | NF-22 (T-6) | 2.65 |
| 52 | NF-23 (T-9) | 2.95 |
| 52 | NF-24 (T-13) | 3.45 |
| 52 | NF-25 (T-18) | 3.95 |
| 52 | P-20 | 2.05 |
| 52 | WH-111 | .30 |
| 53 | C-75 | 289.95 |
| 53 | C-76 | 339.95 |
| 53 | DT-57 (100-A-8) | 399.95 |
| 53 | DT-58 (100-8) | 439.95 |
| 53 | DT-59 (150-8) | 489.95 |
| 53 | K-25 | 46.65 |
| 53 | K-26 | 5.95 |
| 53 | LB-1 (1759) | 6.50 |
| 53 | LB-2 (1743) | 9.00 |
| 53 | LB-3 (1762) | 7.50 |

Prices are based on those prevailing at time of shipment.